

<u>KEY FEATURES</u>

- Incredible Storage on All Floorplans
- Coachmen Even Cool Ducting System (On Select Models)
- Pre-Wired for Rooftop Solar and Sidewall Portable Solar Panel
 - Optional: Rooftop 200W or 400W Solar Panel and Solar Controller
- Residential Queen-Sized Bed
- Azdel Substrate with Aluminum Framing. The Thickest Azdel in its Class Assuring Lifetime Integrity
- Shorter Cabover Bunk
 Increases Curb Appeal and Improves Vision for Driver and Passenger
- Standard: 4,000W Onan Generator On Board
- Oversized Rear Cargo Storage (On Select Models)

SPECS & FLOORPLANS

Institution Institution Institution Institution ENGINE V6 3.5L ECOBOOST V8 7.3L V8 7.3L V8 7.3L HORSE POWER 310 350 350 350 TORQUE 400 468 468 468 WHEEL BASE 156" 158" 158" 190" GVWR(LBS.) 11,000 12,500 12,500 14,500 GCWR(LBS.) 15,000 20,000 22,000 22,000 UVW (APPROX.LBS.) 8,058 9,441 9,721 11,715 CCC (APPROX.LBS.) 2,709 3,059 2,779 2,785 GAWR FRONT (LBS.) 4,630 5,000 5,000 5,000 GAWR FRONT (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7" 6'11" 6'11" 6'11" EXTERIOR WIDTH 77" 8'4" 8'4" 8'4" EXTERIOR HEIGHT (WITH H/C) 10'6" 10'10" 10'10" 10'11" EXTERIOR HEIGHT (UMITH H/CH) <th></th> <th>20CB</th> <th>22XG</th> <th>23XG</th> <th>26XG</th>		20CB	22XG	23XG	26XG
Endine EcoBoost V8 7.5L V8 7.5L V8 7.5L HORSE POWER 310 350 350 350 TORQUE 400 468 468 468 WHEEL BASE 156" 158" 158" 190" GVWR (LBS.) 11,000 12,500 12,500 14,500 GCWR (LBS.) 15,000 20,000 20,000 22,000 UVW (APPROX. LBS.) 8,058 9,441 9,721 11,715 CCC (APPROX. LBS.) 2,709 3,059 2,779 2,786 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7' 6'11" 6'11" 6'11" EXTERIOR WIDTH 7'7' 8'4' 8'4' 8'4' EXTERIOR HEIGHT (WITH A/C) 10'6" 10'10'' 10'11" EXTERIOR LENGTH (WITH HITCH) 23'9" 24'3" 25'10' 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.)	CHASSIS		350 FORD	350 FORD	450 FORD
TORQUE 400 468 468 468 WHEEL BASE 156" 158" 156" 190" GVWR (LBS.) 11,000 12,500 12,500 22,000 GCWR (LBS.) 15,000 20,000 20,000 22,000 UVW (APPROX. LBS.) 8,058 9,441 9,721 11,715 CCC (APPROX. LBS.) 2,709 3,059 2,779 2,785 GAWR FRONT (LBS.) 4,630 5,000 5,000 5,000 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7" 6'11" 6'11" 6'11" EXTERIOR HEIGHT 7'7 8'4" 8'4" 8'4" EXTERIOR HEIGHT (WITH A/C) 10'6" 10'10" 10'11" EXTERIOR LENGTH (WITH HITCH) 2'3'9" 24'3" 25'10" 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.)	ENGINE		V8 7.3L	V8 7.3L	V8 7.3L
WHEEL BASE 156" 158" 158" 190" GVWR (LBS.) 11,000 12,500 12,500 14,500 GCWR (LBS.) 15,000 20,000 20,000 22,000 UVW (APPROX. LBS.) 8,058 9,441 9,721 11,715 CCC (APPROX. LBS.) 2,709 3,059 2,779 2,785 GAWR FRONT (LBS.) 4,630 5,000 5,000 5,000 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7" 6'11" 6'11" 6'11" EXTERIOR WIDTH 7'7" 8'4" 8'4" 8'4" EXTERIOR LENGTH (WITH A/C) 10'6" 10'10" 10'11" 10'11" EXTERIOR LENGTH (WITH HITCH) 23'9" 24'3" 25'10" 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31	HORSE POWER	310	350	350	350
GVWR (LBS.)11,00012,50012,50014,500GCWR (LBS.)15,00020,00020,00022,000UVW (APPROX. LBS.)8,0589,4419,72111,715CCC (APPROX. LBS.)2,7093,0592,7792,785GAWR FRONT (LBS.)4,6305,0005,0005,000GAWR REAR (LBS.)7,2758,5008,5009,600INTERIOR HEIGHT6'7"6'11"6'11"6'1"EXTERIOR WIDTH7'7"8'4"8'4"8'4"EXTERIOR LENGTH (WITH A/C)10'6"10'10"10'10"10'11"EXTERIOR LENGTH (WITH HITCH)23'9"24'3"25'10"29'4"HITCH WEIGHT (LBS.)4,0005,0005,0007,500FUEL CAPACITY (GAL.)31555555LP CAPACITY (GAL.)38415050WATER HEATER CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	TORQUE	400	468	468	468
GCWR (LBS.)15,00020,00020,00022,000UVW (APPROX. LBS.)8,0589,4419,72111,715CCC (APPROX. LBS.)2,7093,0592,7792,785GAWR FRONT (LBS.)4,6305,0005,0005,000GAWR REAR (LBS.)7,2758,5008,5009,600INTERIOR HEIGHT6' 7"6' 11"6' 11"6' 11"EXTERIOR WIDTH7' 7"8' 4"8' 4"8' 4"EXTERIOR HEIGHT (WITH A/C)10' 6"10' 10"10' 10"10' 11"EXTERIOR LENGTH (WITH HITCH)23' 9"24' 3"25' 10"29' 4"HITCH WEIGHT (LBS.)4,0005,0005,0007,500FUEL CAPACITY (GAL.)31555555LP CAPACITY (GAL.)38415050WATER HEATER CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	WHEEL BASE	156"	158"	158"	190"
UVW (APPROX. LBS.) 8,058 9,441 9,721 11,715 CCC (APPROX. LBS.) 2,709 3,059 2,779 2,785 GAWR FRONT (LBS.) 4,630 5,000 5,000 5,000 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6' 7" 6' 11" 6' 11" 6' 11" EXTERIOR WIDTH 7' 7" 8' 4" 8' 4" 8' 4" EXTERIOR HEIGHT (WITH A/C) 10' 6" 10' 10" 10' 11" 10' 11" EXTERIOR LENGTH (WITH HITCH) 23' 9" 24' 3" 25' 10" 29' 4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 38 41 50 50 WATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31	GVWR(LBS.)	11,000	12,500	12,500	14,500
CCC (APPROX. LBS.) 2,709 3,059 2,779 2,785 GAWR FRONT (LBS.) 4,630 5,000 5,000 5,000 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7" 6'11" 6'11" 6'11" EXTERIOR WIDTH 7'7" 8'4" 8'4" 8'4" EXTERIOR HEIGHT (WITH A/C) 10'6" 10'10" 10'10" 10'11" EXTERIOR LENGTH (WITH HITCH) 23'9" 24'3" 25'10" 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	GCWR(LBS.)	15,000	20,000	20,000	22,000
GAWR FRONT (LBS.) 4,630 5,000 5,000 GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6'7" 6'11" 6'11" 6'11" EXTERIOR WIDTH 7'7" 8'4" 8'4" 8'4" EXTERIOR HEIGHT (WITH A/C) 10'6" 10'10" 10'10" 10'11" EXTERIOR LENGTH (WITH HITCH) 23'9" 24'3" 25'10" 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (LBS.) 68 68 68 68 FRESH WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 60.8 47 146 124	UVW (APPROX. LBS.)	8,058	9,441	9,721	11,715
GAWR REAR (LBS.) 7,275 8,500 8,500 9,600 INTERIOR HEIGHT 6' 7" 6' 11" 6' 11" 6' 11" EXTERIOR WIDTH 7' 7" 8' 4" 8' 4" 8' 4" EXTERIOR HEIGHT (WITH A/C) 10' 6" 10' 10" 10' 10" 10' 11" EXTERIOR LENGTH (WITH A/C) 10' 6" 10' 10" 10' 10" 29' 4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31	CCC (APPROX. LBS.)	2,709	3,059	2,779	2,785
INTERIOR HEIGHT 6' 7" 6' 11" 6' 11" EXTERIOR WIDTH 7' 7" 8' 4" 8' 4" EXTERIOR HEIGHT (WITH A/C) 10' 6" 10' 10" 10' 10" EXTERIOR LENGTH (WITH A/C) 10' 6" 10' 10" 10' 10" EXTERIOR LENGTH (WITH HITCH) 23' 9" 24' 3" 25' 10" 29' 4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (LBS.) 68 68 68 68 FRESH WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 BLACK TANK CAPACITY (GAL.) 60.8 47 146 124	GAWR FRONT (LBS.)	4,630	5,000	5,000	5,000
TYT" 8'4" 8'4" EXTERIOR WIDTH 10'6" 10'10" 10'10" 10'11" EXTERIOR HEIGHT (WITH A/C) 10'6" 10'10" 10'10" 10'11" EXTERIOR LENGTH (WITH HITCH) 23'9" 24'3" 25'10" 29'4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (LBS.) 68 68 68 68 FRESH WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	GAWR REAR (LBS.)	7,275	8,500	8,500	9,600
EXTERIOR HEIGHT (WITH A/C) 10' 6" 10' 10" 10' 10" 10' 11" EXTERIOR LENGTH (WITH HITCH) 23' 9" 24' 3" 25' 10" 29' 4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (LBS.) 68 68 68 68 FRESH WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) TANKLESS TANKLESS TANKLESS TANKLESS GREY TANK CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	INTERIOR HEIGHT	6' 7"	6' 11"	6' 11"	6' 11"
EXTERIOR LENGTH (WITH HITCH) 23' 9" 24' 3" 25' 10" 29' 4" HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (GAL.) 38 41 50 50 WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) TANKLESS TANKLESS TANKLESS GREY TANK CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	EXTERIOR WIDTH	7' 7"	8' 4"	8' 4"	8' 4"
HITCH WEIGHT (LBS.) 4,000 5,000 5,000 7,500 FUEL CAPACITY (GAL.) 31 55 55 55 LP CAPACITY (LBS.) 68 68 68 68 FRESH WATER CAPACITY (GAL.) 38 41 50 50 WATER HEATER CAPACITY (GAL.) TANKLESS TANKLESS TANKLESS TANKLESS GREY TANK CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	EXTERIOR HEIGHT (WITH A/C)	10' 6"	10' 10"	10' 10"	10' 11"
FUEL CAPACITY (GAL.)31555555LP CAPACITY (LBS.)68686868FRESH WATER CAPACITY (GAL.)38415050WATER HEATER CAPACITY (GAL.)TANKLESSTANKLESSTANKLESSGREY TANK CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	EXTERIOR LENGTH (WITH HITCH)	23'9"	24' 3"	25' 10"	29' 4"
LP CAPACITY (LBS.)68686868FRESH WATER CAPACITY (GAL.)38415050WATER HEATER CAPACITY (GAL.)TANKLESSTANKLESSTANKLESSTANKLESSGREY TANK CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	HITCH WEIGHT (LBS.)	4,000	5,000	5,000	7,500
FRESH WATER CAPACITY (GAL.)38415050WATER HEATER CAPACITY (GAL.)TANKLESSTANKLESSTANKLESSTANKLESSGREY TANK CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	FUEL CAPACITY (GAL.)	31	55	55	55
WATER HEATER CAPACITY (GAL.)TANKLESSTANKLESSTANKLESSTANKLESSGREY TANK CAPACITY (GAL.)26283231BLACK TANK CAPACITY (GAL.)21313131EXTERIOR STORAGE (CU. FT.)60.847146124	LP CAPACITY (LBS.)	68	68	68	68
GREY TANK CAPACITY (GAL.) 26 28 32 31 BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	FRESH WATER CAPACITY (GAL.)	38	41	50	50
BLACK TANK CAPACITY (GAL.) 21 31 31 31 EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	WATER HEATER CAPACITY (GAL.)	TANKLESS	TANKLESS	TANKLESS	TANKLESS
EXTERIOR STORAGE (CU. FT.) 60.8 47 146 124	GREY TANK CAPACITY (GAL.)	26	28	32	31
	BLACK TANK CAPACITY (GAL.)	21	31	31	31
AWNING LENGTH 14' 15' 16' 20'	EXTERIOR STORAGE (CU. FT.)	60.8	47	146	124
	AWNING LENGTH	14'	15'	16'	20'

GVWR (Gross Vehicle Weight Rating) is the maximum permissible weight of the unit when fully loaded. It includes all weights, inclusive of all fluids, occupants, cargo, optional equipment and accessories. For safety and product performance do NOT exceed the GVWR.

GCWR (Gross Combined Weight Rating) is the maximum permissible loaded weight of your motor home and any towed trailer or towed vehicle. Actual GCWR of this vehicle may be limited by the sum of the GVWR and the installed hitch receiver maximum capacity rating; see hitch rating label for detail.

GAWR (Gross Axle Weight Rating) is the maximum permissible weight, including cargo, fluids, optional equipment and accessories that can be safely supported by each axle.

UVW (Unloaded Vehicle Weight)* is the typical weight of the unit as manufactured at the factory. It includes all weight at the unit's axle(s), including full fuel, all fluids and LP Gas. The UVW does not include cargo, fresh potable water, additional optional equipment or dealer installed accessories.

*Estimated Average based on standard build optional equipment.

CCC (Cargo Carrying Capacity)** is the amount of weight available for fresh potable water, cargo, passengers, additional optional equipment and accessories. CCC is equal to GVWR minus UVW. Available CCC should accommodate fresh potable water (8.3 lbs per gallon). Before filling the fresh water tank, empty the black and gray tanks to provide for more cargo capacity.

** Estimated average based on standard build optional equipment

Each Coachmen motorhome is weighed at the manufacturing facility prior to shipping. A label identifying the unloaded vehicle weight of the actual unit and the cargo carrying capacity is applied to every Coachmen motorhome prior to leaving our facilities.

The load capacity of your unit is designated by weight, not by volume, so you cannot necessarily use all available space when loading your unit

Actual towing capacity is dependent upon your particular loading and towing circumstances, which includes the GVWR, GAWR and GCWR as well as adequate trailer brakes. Please refer to the Operator's Manual of your vehicle for further towing information.

YOUR CROSS TRAIL DEALER



24/7 EMERGENCY **ROADSIDE ASSISTANCE** WITH VEHICLE PURCHASE*

WINCH OUT MOBILE TIRE SERVICE TECHNICAL SUPPORT DELIVERY OF FUEL & **RV MOBILE** EMERGENCY FLUIDS LOCKSMITH/LOCKOUT MECHANIC DEALER LOCATOR SERVICES SERVICES

> SPECIALIZED (800) 608-2751

*VALID FOR 1 YEAR FROM DATE OF PURCHASE



Download a virtual brochure at www.coachmenrv.com



www.ForestRiverBuyLocal.com



Learn More Scan this barcode using a QR Reader on your smart phone to learn more about Forest River.



All information contained in this brochure is believed to be accurate at the time of publication. However, during the model year, it may be necessary to make revisions and Coachmen reserves the right to make all such changes without notice, including prices, colors, materials, equipment and specifications as well as the addition of new models and the discontinuance of models shown in this brochure. Therefore, e consult with your Coachmen dealer and confirm the existence of any materials, design or specifications that are material to your purchase decision, 01/24

©Copyright 2024 Coachmen RV a Division of Forest River Inc - All Rights Reserved.





Coachmen RV, a Division of Forest River, Inc., A Berkshire Hathaway Company


423 N. Main St., P.O. Box 30, Middlebury, IN 46540

To learn more about Coachmen RV and our products and see how Coachmen is making the easy life easier, visit www.coachmenrv.com



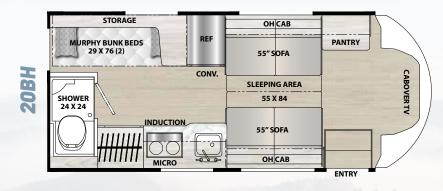

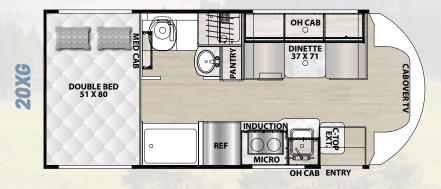

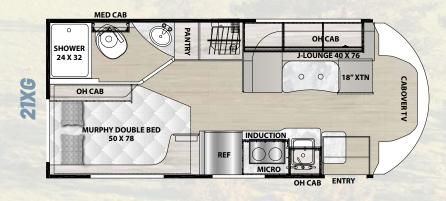

KEY FEATURES

- Renogy Empowered State-ofthe-Art Hybrid Electrical System
- Standard 400AMP/HR Lithium Battery
 - Optional: Dual 400AMP/HR Lithium Batteries
- 3,000W Inverter
- Gen Prep (Standard)
 - Optional: 2-Way LP & Gas Generator
- Azdel Substrate with Aluminum Framing. The Thickest Azdel in its Class Assuring Lifetime Integrity
- Ford Transit Chassis
 - 3.5L Ecoboost Engine
 - 10-Speed Automatic Overdrive with Select-Shift Transmission
 - Available All Wheel Drive
- Dual 250 Amp Alternator
- Efficiently Recharges Coach Batteries
- Lane Keeping Assist
- Adaptive Cruise Control
- Induction Cooktop
- Convection Microwave

SPECS & FLOORPLANS

	20BH	20XG	21XG
CHASSIS	FORD TRANSIT T350 AWD	FORD TRANSIT T350 AWD	FORD TRANSIT T350 AWD
ENGINE	V6 3.5L EcoBoost	V6 3.5L EcoBoost	V6 3.5L EcoBoost
HORSE POWER	310	310	310
TORQUE	400	400	400
WHEEL BASE	156"	156"	156"
GVWR (LBS.)	11,000	11,000	11,000
GCWR (LBS.)	15,000	15,000	15,000
UVW (APPROX. LBS.)	8,532	8,510	8,632
CCC (APPROX. LBS.)	2,050	2,490	2,368
GAWR FRONT (LBS.)	4,630	4,630	4,630
GAWR REAR (LBS.)	7,275	7,275	7,275
INTERIOR HEIGHT	6' 7"	6'7"	6' 7"
EXTERIOR WIDTH	7' 7"	7' 7"	7' 7"
EXTERIOR HEIGHT (WITH A/C)	10' 6"	10' 6"	10' 6"
EXTERIOR LENGTH (WITH HITCH)	24' 1"	24'1"	24'1"
HITCH WEIGHT (LBS.)	4,000	4,000	4,000
FUEL CAPACITY (GAL.)	31	31	31
LP CAPACITY (LBS.)	68	68	68
FRESH WATER CAPACITY (GAL.)	25	30	41
WATER HEATER CAPACITY (GAL.)	TANKLESS	TANKLESS	TANKLESS
GREY TANK CAPACITY (GAL.)	31	27	59
BLACK TANK CAPACITY (GAL.)	31	28	28
EXTERIOR STORAGE (CU. FT.)	TBD	130	47
AWNING LENGTH	14'	14'	14'

GVWR (Gross Vehicle Weight Rating) is the maximum permissible weight of the unit when fully loaded. It includes all weights, inclusive of all fluids, occupants, cargo, optional equipment and accessories. For safety and product performance do NOT exceed the GVWR.

GCWR (Gross Combined Weight Rating) is the maximum permissible loaded weight of your motor home and any towed trailer or towed vehicle. Actual GCWR of this vehicle may be limited by the sum of the GVWR and the installed hitch receiver maximum capacity rating; see hitch rating label for detail.

GAWR (Gross Axle Weight Rating) is the maximum permissible weight, including cargo, fluids, optional equipment and accessories that can be safely supported by each axle.

UVW (Unloaded Vehicle Weight)* is the typical weight of the unit as manufactured at the factory. It includes all weight at the unit's axle(s), including full fuel, all fluids and LP Gas. The UVW does not include cargo, fresh potable water, additional optional equipment or dealer installed accessories.

*Estimated Average based on standard build optional equipment.

CCC (Cargo Carrying Capacity)** is the amount of weight available for fresh potable water, cargo, passengers, additional optional equipment and accessories. CCC is equal to GVWR minus UVW. Available CCC should accommodate fresh potable water (8.3 lbs per gallon). Before filling the fresh water tank, empty the black and gray tanks to provide for more cargo capacity.

** Estimated average based on standard build optional equipment

Each Coachmen motorhome is weighed at the manufacturing facility prior to shipping. A label identifying the unloaded vehicle weight of the actual unit and the cargo carrying capacity is applied to every Coachmen motorhome prior to leaving our facilities.

The load capacity of your unit is designated by weight, not by volume, so you cannot necessarily use all available space when loading your unit.

Actual towing capacity is dependent upon your particular loading and towing circumstances, which includes the GVWR, GAWR and GCWR as well as adequate trailer brakes. Please refer to the Operator's Manual of your vehicle for further towing information.

YOUR CROSS TRAIL DEALER



WITH VEHICLE PURCHASE*

(800) 608-2751

*VALID FOR 1 YEAR FROM DATE OF PURCHASE



Download a virtual brochure at www.coachmenrv.com



www.ForestRiverBuyLocal.com



Learn More ÷. Scan this barcode using a QR Reader on your smart phone to learn more about Forest River.



All information contained in this brochure is believed to be accurate at the time of publication. However, during the model year, it may be necessary to make revisions and Coachmen reserves the right to make all such changes without notice, including prices, colors, materials, equipment and specifications as well as the addition of new models and the discontinuance of models shown in this brochure. Therefore, e consult with your Coachmen dealer and confirm the existence of any materials, design or specifications that are material to your purchase decision. 01/24

©Copyright 2024 Coachmen RV a Division of Forest River Inc - All Rights Reserved.





Coachmen RV, a Division of Forest River, Inc., A Berkshire Hathaway Company


423 N. Main St., P.O. Box 30, Middlebury, IN 46540

To learn more about Coachmen RV and our products and see how Coachmen is making the easy life easier, visit www.coachmenrv.com



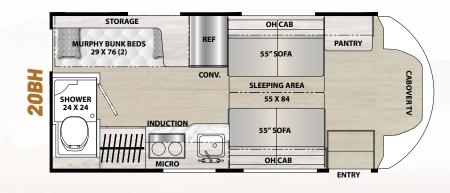

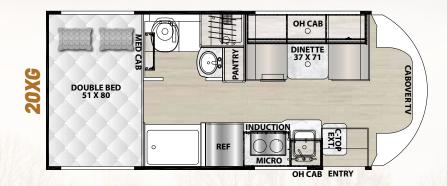

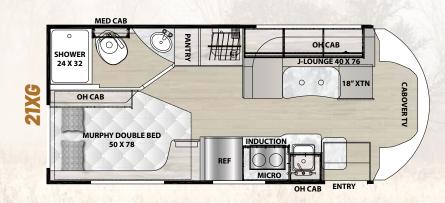

KEY FEATURES

EV PACKAGE

- Renogy Empowered State-of-the-Art Hybrid Electrical System
- Standard 400AMP/HR
 Lithium Battery
 - Optional: 800AMP/HR Lithium Batteries
- 3,000W Inverter
- Gen Prep
- Ford Transit AWD Chassis
- Dual 250 Amp Alternator
- Induction Cooktop
- Convection Microwave

XTREME PACKAGE

- Van Compass 2" Suspension Lift
- Falcon Racing Shocks
- All Terrain Tires
- Black Out Aluminum Rims
- Front Bumper Brush Guard w/LED Lights
- Rigid Running Boards
- XTREME Graphics Package
- Induction Cooktop
- Convection Microwave

SPECS & FLOORPLANS

	20BH	20XG	21XG
CHASSIS	FORD TRANSIT T350 AWD	FORD TRANSIT T350 AWD	FORD TRANSIT T350 AWD
ENGINE	V6 3.5L EcoBoost	V6 3.5L EcoBoost	V6 3.5L EcoBoost
HORSE POWER	310	310	310
TORQUE	400	400	400
WHEEL BASE	156"	156"	156"
GVWR(LBS.)	11,000	11,000	11,000
GCWR(LBS.)	15,000	15,000	15,000
UVW (APPROX. LBS.)	8,532	8,510	8,632
CCC (APPROX. LBS.)	2,050	2,490	2,368
GAWR FRONT (LBS.)	4,630	4,630	4,630
GAWR REAR (LBS.)	7,275	7,275	7,275
INTERIOR HEIGHT	6' 7"	6'7"	6' 7"
EXTERIOR WIDTH	7' 7"	7' 7"	7' 7"
EXTERIOR HEIGHT (WITH A/C)	10' 6"	10' 6"	10' 6"
EXTERIOR LENGTH (WITH HITCH)	24' 1"	24' 1"	24' 1"
HITCH WEIGHT (LBS.)	4,000	4,000	4,000
FUEL CAPACITY (GAL.)	31	31	31
LP CAPACITY (LBS.)	68	68	68
FRESH WATER CAPACITY (GAL.)	25	30	41
WATER HEATER CAPACITY	TANKLESS	TANKLESS	TANKLESS
GREY TANK CAPACITY (GAL.)	31	27	59
BLACK TANK CAPACITY (GAL.)	31	28	28
EXTERIOR STORAGE (CU. FT.)	TBD	130	47
AWNING LENGTH	14'	14'	14'

GVWR (Gross Vehicle Weight Rating) is the maximum permissible weight of the unit when fully loaded. It includes all weights, inclusive of all fluids, occupants, cargo, optional equipment and accessories. For safety and product performance do NOT exceed the GVWR.

GCWR (Gross Combined Weight Rating) is the maximum permissible loaded weight of your motor home and any towed trailer or towed vehicle. Actual GCWR of this vehicle may be limited by the sum of the GVWR and the installed hitch receiver maximum capacity rating; see hitch rating label for detail.

GAWR (Gross Axle Weight Rating) is the maximum permissible weight, including cargo, fluids, optional equipment and accessories that can be safely supported by each axle.

UVW (Unloaded Vehicle Weight)* is the typical weight of the unit as manufactured at the factory. It includes all weight at the unit's axle(s), including full fuel, all fluids and LP Gas. The UVW does not include cargo, fresh potable water, additional optional equipment or dealer installed accessories.

*Estimated Average based on standard build optional equipment.

CCC (Cargo Carrying Capacity)** is the amount of weight available for fresh potable water, cargo, passengers, additional optional equipment and accessories. CCC is equal to GVWR minus UVW. Available CCC should accommodate fresh potable water (8.3 lbs per gallon). Before filling the fresh water tank, empty the black and gray tanks to provide for more cargo capacity.

** Estimated average based on standard build optional equipment

Each Coachmen motorhome is weighed at the manufacturing facility prior to shipping. A label identifying the unloaded vehicle weight of the actual unit and the cargo carrying capacity is applied to every Coachmen motorhome prior to leaving our facilities.

The load capacity of your unit is designated by weight, not by volume, so you cannot necessarily use all available space when loading your unit.

Actual towing capacity is dependent upon your particular loading and towing circumstances, which includes the GVWR, GAWR and GCWR as well as adequate trailer brakes. Please refer to the Operator's Manual of your vehicle for further towing information.



*VALID FOR 1 YEAR FROM DATE OF PURCHASE



Download a virtual brochure at **www.coachmenrv.com**



www.ForestRiverBuyLocal.com



Learn More Scan this barcode using a QR Reader on your smart phone to learn more about Forest River.



All information contained in this brochure is believed to be accurate at the time of publication. However, during the model year, it may be necessary to make revisions and Coachmen reserves the right to make all such changes without notice, including prices, colors, materials, equipment and specifications as well as the addition of new models and the discontinuance of models shown in this brochure. Therefore, please consult with your Coachmen dealer and confirm the existence of any materials, design or specifications that are material to your purchase decision. 01/24

©Copyright 2024 Coachmen RV a Division of Forest River Inc - All Rights Reserved.



Coachmen RV, a Division of Forest River, Inc., A Berkshire Hathaway Company

423 N. Main St., P.O. Box 30, Middlebury, IN 46540

To learn more about Coachmen RV and our products and see how Coachmen is making the easy life easier, visit www.coachmenry.com

YOUR CROSS TRAIL XTREME DEALER