



OWNER'S MANUAL

CRUISE AIR IMPULSE & ENCOUNTER


MOTOR HOMES BY . . .

GEORGIE BOY MANUFACTURING, INC.

69950 M-62 •

EDWARDSBURG, MICHIGAN 49112 •

PHONE (616) 663-3415



Welcome

Welcome to the recreational vehicle lifestyle! This manual describes the many features of your recreational vehicle and gives a few simple steps relating to use or maintenance. Use these suggestions to help assure your family of years of carefree, pleasant traveling, or vacationing.

Your dealer's Service or Sales Department will promptly handle any normal problem which might occur. Customer service is of utmost importance to your dealer and is just as important to the manufacturer.

Reference Material

Keep this Owner's Manual, the Chassis Operator's Manual, and your Owner's Information Kit of Component and Accessory Manuals in a convenient place in your motor home.

Motor Homes

Cruise Air, Impulse, and Encounter motor homes are covered in this manual. The Impulse always has a diesel engine and is shown as such. The Cruise Air and Encounter are most often available on Ford or Chevrolet chassis, and run on unleaded gasoline. A diesel engine for the Cruise Air and Encounter is available, but is not shown in this manual.

Table of Contents

<u>Page</u>	<u>Contents</u>
4	External Features
7	Vehicle Load Capacity and Weighing
7	Planning and Preparation
8	Getting Ready To Leave
12	On The Road
13	Maintenance of Power Systems
17	Electrical Systems
20	Liquid Petroleum Gas System
24	Plumbing Systems
28	Component Monitoring System
28	Equipment and Furnishings
29	Care and Maintenance
31	Extended Storage
32	Emergencies
33	Maintenance and Storage Notes
34	Index

Foreword

This manual describes the various design features and operating procedures of your motor home to aid you in understanding its capabilities.

Like all fine equipment, your motor home will require care and regular maintenance in order to retain its maximum performance characteristics. This manual, along with the Chassis Operator's Manual and the information from other component manufacturers provided for your use, defines the important areas of maintenance you will want to follow. The few minutes spent reading and understanding these instructions will result in your having a good working knowledge of the unit. Knowing how to use your motor home and how to keep it properly maintained will help you enjoy thousands of miles of motoring pleasure.

All of the information in this Manual is important. However statements preceded by the words, Warning, Caution, and Note are especially important. Heed them carefully.

WARNING STATEMENTS CONTAIN INFORMATION THAT IS IMPORTANT FOR YOUR SAFETY AND THE SAFETY OF YOUR PASSENGERS.

Caution statements contain information that is important to the protection of your property.

Note statements contain information that is important to remember, but not necessarily safety related.

The information presented in the Manual is intended to be as comprehensive as possible. However, your motor home may differ in some ways from the photographs, illustrations, and information presented. Likewise, production components are subject to change without notice and without obligation by the manufacturer. If you have questions regarding your specific motor home, contact your dealer or call the service department at Georgie Boy Mfg., Inc. Please refer to the Georgie Boy Mfg. serial number which is stamped on a metal tag under the hood and printed on the vehicle information sticker near the driver's side front window.

Construction Standards

It is our intention and utmost goal to provide a safe and quality built motor home to each and every purchaser. To this end, we have strived to build all our units to the most stringent requirements of all Codes and Standards which cover the production of motor homes. In some cases, those requirements are inconsistent and we have chosen the standard which meets the legal requirements for the State in which it is delivered. We are confident the purchasers of our products have received motor homes that will meet their recreational requirements with the optimum safety, quality, and design.

Any alterations or additions or results of those alterations or additions to the finished product as shipped by Georgie Boy are the responsibility of the party making the alterations or additions, and not Georgie Boy Mfg., Inc.

Certifications of construction standards by the primary vehicle manufacturer are the responsibility of that manufacturer and are not assumed by us.

Your motor home has been designed to conform with or exceed the American National Standards Institute Code A119.2 and/or State and Federal motor vehicle standards as applicable. These Standards establish the plumbing, heating, electrical, and other requirements for quality and safety. Compliance with this Standard is indicated by the seal installed just outside the passenger entrance door. This seal is the outward sign of internal quality.

Should you have any questions regarding operation, maintenance or service, please contact your dealer immediately so he can be of assistance.

Service

Optimum Service Satisfaction

You can contribute greatly to your level of satisfaction with dealer repairs by following a few simple service guidelines:

1. Make a list of the items that need to be repaired. Often these are minor, incidental things that you will discover in the normal, day-to-day operation

of your motor home. Make your list as you notice these items. Include any emergency work that may have been done by an unauthorized motor home mechanic since your previous service appointment.

2. Allow sufficient service time. Each item on your list will take a certain amount of time to repair satisfactorily. Discuss the list of repair items over the phone when you call for an appointment. Your dealer's service department can give you a time estimate. Schedule the appointment well in advance of the date that you want to leave on a trip. Allow for extra time, especially if parts must be ordered. Reconfirm the repair time estimate in person with the service manager.
3. Prioritize your repair list. If you are in a hurry, discuss this with the service manager and decide which repair items should be fixed first. If the entire list cannot be completed, schedule another appointment at a more-convenient time.
4. Discuss warranty repair items. When you schedule the appointment, tell the service manager if any warranty work must be done. Show him the warranty registration papers.
5. Stay in the dealer's customer lounge. This is for your safety, for insurance reasons, and to facilitate the mechanic's work on your motor home.
6. Inspect the mechanic's work. Even if you cannot watch the mechanic, you should exercise your right to carefully inspect the repairs once they are completed. Give it a visual inspection and go for a test drive if necessary. If you are not satisfied, talk with the service manager ... not the mechanic. Allow the service manager to test drive the motor home if necessary. If time does not allow immediate repair, make another appointment for as soon as possible.

If You Are Not Satisfied

If, for some unusual reason, a problem is not handled to your satisfaction, we make the following suggestions:

1. Discuss any warranty-related problems directly with the General Manager or the Owner of the dealership, give him an opportunity to help his service department resolve the matter for you.
2. Should a problem arise that cannot be resolved to your satisfaction by your local dealer, contact Georgie Boy Mfg., Inc. Service Department Monday - Friday, 8:00 am - 5:00 pm Eastern time at (616-663-3415 or 1-800-521-8733).
3. The above steps are suggested because of our sincere belief that your dealer will satisfactorily handle any problem which might arise. Should you find it necessary to correspond with our factory, please send a letter describing the circumstances to:

Georgie Boy Mfg., Inc.

69950 M-62

Edwardsburg, Michigan 49112

Please include model and serial number of your vehicle.

Thank you for choosing our product.

Your dealer and we, the manufacturer, will continually strive to merit your confidence.



Reporting Safety Defects

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying Georgie Boy Mfg., Inc.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Georgie Boy Mfg., Inc.




To contact NHTSA, you may either call the Auto Safety Hotline toll-free at 1-800-424-9393 (or 366-0123 in Washington, D.C. area) or write to: NHTSA, U.S. Department of Transportation, Washington, D.C. 20590. You can also obtain other information about motor vehicle safety from the Hotline.

External Features - Cruise Air

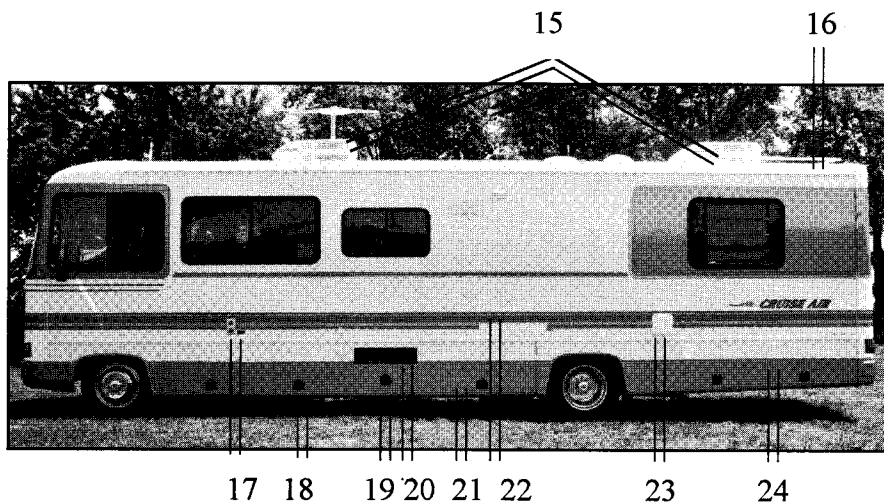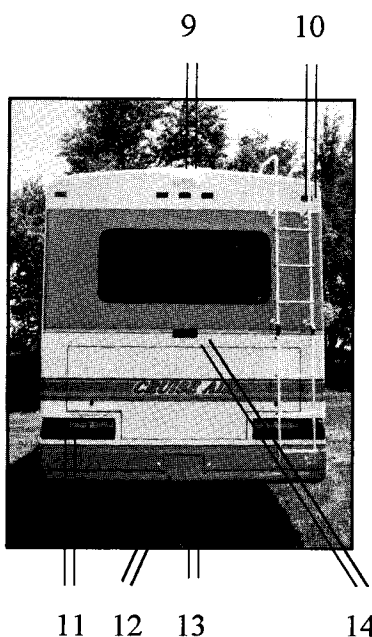



1. TV Antenna
2. Front Running Lights
3. Windshield Wipers
4. Rearview Mirror
5. Headlights
6. Main Engine Battery and Auxiliary 12-Volt Battery (inside engine compartment behind bumper)
7. Engine Hood Door
8. Turn Signals and Emergency Flasher Lights
9. Rear Running Lights
10. Overhead Ladder
11. Tail, Stop, Turn, Back Up, and Flasher Lights
12. License Plate
13. Hitch
14. Stop Light
15. Front and Rear Air Conditioners
16. Roof Rack
17. Furnace Exhaust Vent
18. Storage Compartment
19. Storage Compartment
20. Generator Compartment
21. Holding Tank Compartment
22. Furnace Exhaust Vent
23. Fuel Filler Pipe
24. Electrical and Storage Compartment
25. Storage Compartment
26. Water Heater Access Door
27. Patio Receptacle
28. Refrigerator Vent
29. Storage Compartment
30. LP Gas Compartment
31. Patio Door Light
32. Passenger Entrance Door
33. Storage Compartment

External Features - Impulse

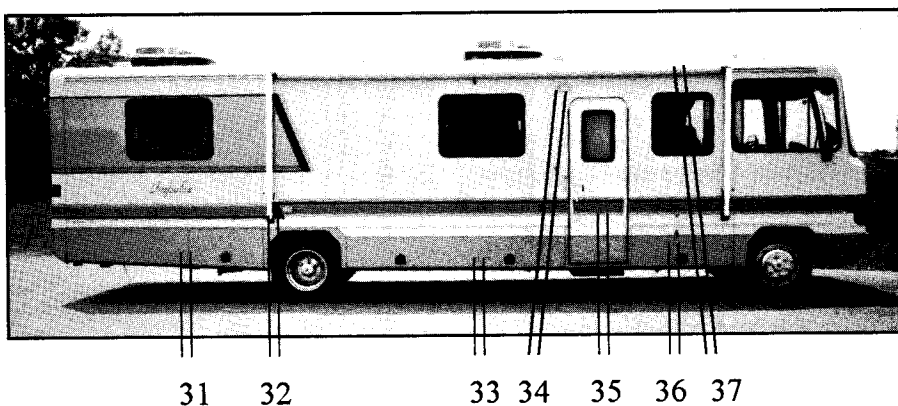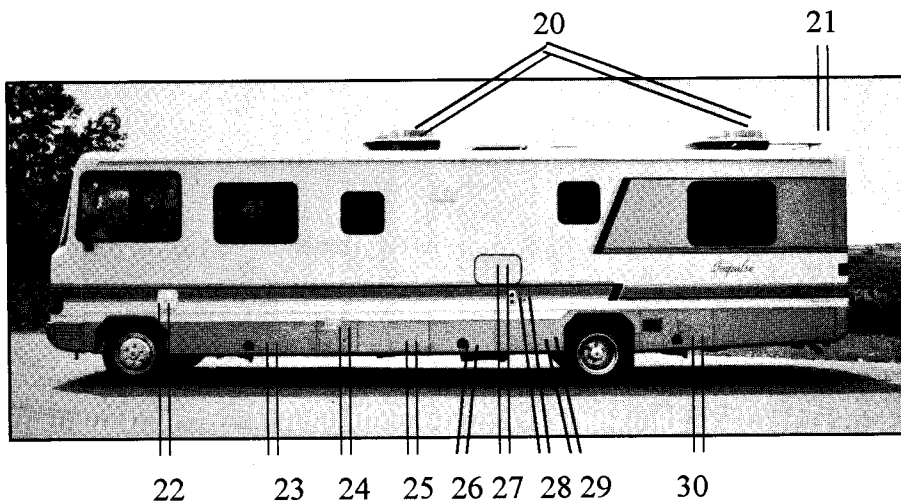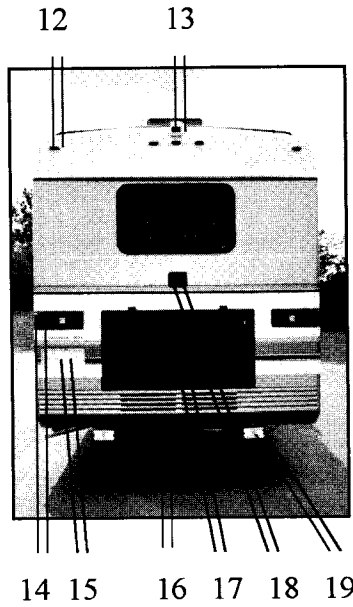

1. Front Running Lights
2. TV Antenna
3. Windshield Wipers
4. Rearview Mirror
5. Headlights
6. Generator Compartment
7. Auxiliary 12-Volt Batteries (behind bumper)
8. Generator
9. License Plate
10. Fog Lights
11. Turn Signals and Emergency Flasher Lights
12. Rear Running Lights
13. Backup Video Camera
14. Tail, Stop, Turn, Backup, and Flasher Lights
15. License Plate
16. Hitch
17. Diesel Engine Compartment
18. Sop Light
19. Lights for Backup Video Camera
20. Front and Rear Air Conditioners
21. Roof Rack
22. Fuel Filler Pipe
23. Storage Compartment
24. Water Heater Access Door
25. Holding Tank Compartment
26. Plumbing Compartment
27. Refrigerator Vent
28. Furnace Exhaust Vent
29. Holding Tank Compartment
30. Electrical and Storage Compartment
31. Storage Compartment
32. Patio Receptacle
33. Storage Compartment
34. Patio Light
35. Passenger Entrance Door
36. LP Gas Compartment
37. Awning

External Features - Encounter

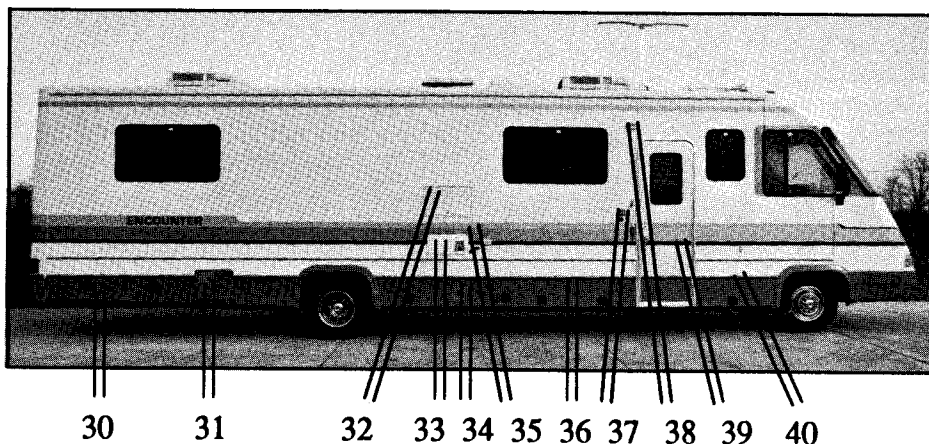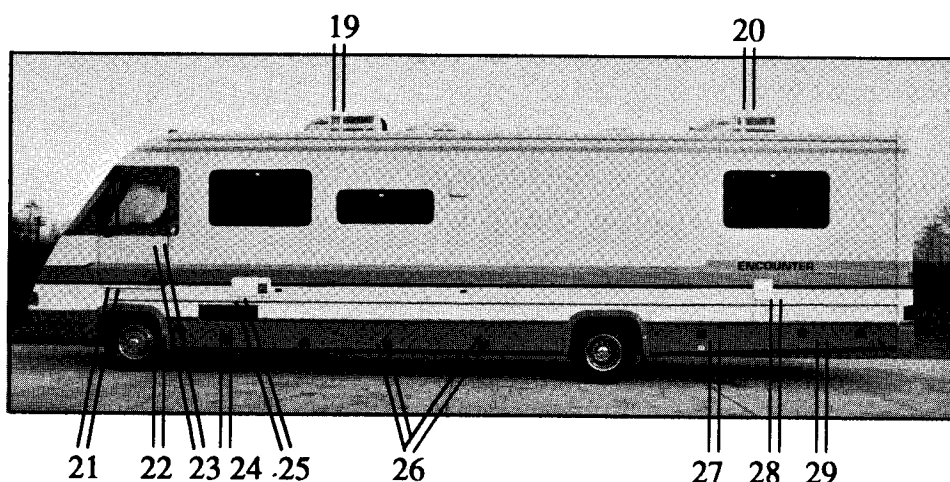

1. Rearview Mirror
2. Air Horns
3. TV Antenna
4. Front Running Lights
5. Windshield Wipers
6. Turn Signals, Emergency Flasher Lights
7. Headlights
8. License Plate
9. Engine Hood Door
10. Main Engine Battery and Auxiliary 12-Volt Batteries (behind bumper)
11. Fog Lights
12. Rear Running Lights
13. Tail, Stop, Turn Flasher
14. Back Up Lights
15. License Plate
16. Hitch
17. Stop Light
18. Rear Storage Compartment
19. Front Roof Air Conditioner
20. Rear Roof Air Conditioner
21. Driver's Door
22. Driver's Door Step
23. Grab Handle
24. Generator Compartment
25. Furnace Vent
26. Storage Compartment
27. Holding Tank Compartment
28. Fuel Filler Pipe
29. Electrical Compartment
30. Storage Compartment
31. Water Heater Access Door
32. Refrigerator Vent
33. Furnace Vent
34. LP Gas Compartment
35. Patio Receptacle
36. Storage Compartment
37. Electronic Light Switch
38. Patio Light
39. Main Entry Door
40. Storage Compartment

Vehicle Load Capacity and Weighing

MFD. BY: GEORGIE BOY MFG. INC.	
EDWARDSBURG, MI 49112	
DATE OF MFR. JUNE 1992	
INC. VEH. MFD. BY: FORD	
DATE OF INC. MFG. APRIL 1992	
G.V.W.R. 17000	
G.A.W.R. FRONT	6000 WITH LT235/85R
TIRES,	16.0X6K RIMS, AT
80	PSI COLD SINGLE
REAR	11000 WITH LT235/85R
TIRES,	16.0X6K RIMS, AT
80	PSI COLD
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON	
V.I.N. 3FCMF53G5NJA02483/R10617871	
TYPE: MULTI PURPOSE PASS. VEHICLE	

Your motor home is designed to carry the loads defined by the Gross Axle Weight Rating (GAWR) and Gross Vehicle Weight Rating (GVWR) shown on the vehicle information sticker

posted near the driver's side front window. These ratings are for a fully-loaded vehicle including passengers and normal belongings.

Note: Exceeding the GAWR or GVWR of your motor home can cause undesirable handling characteristics and may even create a safety hazard. Modification of your vehicle by addition of racks not specified by the manufacturer to carry additional equipment or vehicles is not recommended and may make your warranty inapplicable.

Note: Be sure the weight of passengers, equipment, and supplies does not cause your motor home to exceed axle loads and overall vehicle loads for which it was designed. If in doubt, weigh the vehicle at a public scale.

Periodically weigh the motor home at a public scale to determine axle loads. The following procedure is suggested, although any method recommended by the scale operator which correctly determines weight values is acceptable. During all measurements, it is important that the vehicle be kept as level as possible.

1. Run only the front wheels onto the scale platform and obtain a reading. (This first value is the front axle Gross Axle Weight.)
2. Next, place the entire vehicle (all axles) on the scale and obtain a reading. (This second value is Gross Vehicle Weight.)

3. Drive forward until only the rear axle is on the platform and obtain a reading. (This third reading is rear axle Gross Axle Weight.)
4. Compare reading 2 with the GVWR of your vehicle. If this reading exceeds the GVWR rating, it will be necessary to reduce total vehicle load.
5. If reading 2 is less than the GVWR of your vehicle, check readings 1 and 3 to verify that each is less than the GAWR on the certification tag. If either exceeds the GAWR for the axle, redistribute enough equipment from front to back or the reverse to ensure that loads on front and rear axles are within the required limit.

Check vehicle weight periodically to obtain optimum mileage from tires and improved handling. Tires should always be inflated as recommended in the Chassis Manufacturer's Instructions, or on the tire sidewall. See your Chassis Operator's Manual.

Planning and Preparation

Plan your trip and organize all preparations before you leave. Proper preparation can be the key to getting the most enjoyment from your motor home.

The following suggestions are provided only as a guide. Review them carefully before starting on your first trip. Refer to the list when on trips and make note of items forgotten to make subsequent trips even more enjoyable.

1. Plan your route carefully. Consult maps and guidebooks (available at most bookstore and newsstands) to become aware beforehand of any road conditions, campsite availability, and other circumstances.
2. Be sure your batteries are fully charged and that all equipment is serviced and ready for travel.
3. Check all fluids including:
 - Motor home engine crankcase oil
 - Transmission fluid
 - Power steering fluid
 - Radiator recovery system reservoir level
 - Master cylinder brake fluid

- Windshield washer reservoir level
 - Hydraulic leveling jack reservoir, if so equipped
4. Inspect wheel lugs for tightness. Examine all tires for road damage, then inflate to the proper pressures as recommended in the Chassis Operator's Manual.
- Note:** Tire pressures listed in your Chassis Operator's Manual are for cold tires and normal driving and load conditions, and also for unusual operating or load conditions. Use the appropriate pressure for your driving conditions.
5. Check oil level in the generator power plant (if installed). Refer to instructions and maintenance manual provided by the generator manufacturer for other pre-use service requirements applicable to this equipment. Check that extra oil and other service supplies are provided for the generator power plant if the motor home is to be used for extended periods.
 6. If supplied, check that jack, jack handle, and lug wrench are properly stowed.
 7. Make sure that a serviceable fire extinguisher is secured in the mounting bracket.
 8. Verify that all items you plan to take are on board.
 9. Check that accessories, such as a plastic sewer hose with the necessary fittings and a water supply line, such as garden-hose type approved for 125 psi, are on board.
- Note:** It may be desirable to check ahead with specific campsites where you plan to stop for any special adapters which may be required.
10. Fill fresh water tank, if required. (Refer to the Plumbing Section.)
 11. Make sure that drain-line cap and holding-tank knife valves are closed and secured. Add a holding-tank chemical to a few gallons of water in your body-waste holding tank. (Refer to Plumbing Section.)
 12. Check all stop lights, running lights, turn signals, and other vehicle safety items.
 13. Put motor home contents in "travel" condition.
 14. Secure any loose objects which could shift while

traveling.

15. Secure refrigerator contents (place lids on all containers holding liquids, for example) then secure locking latch on refrigerator door.
16. Be sure all cabinets have the contents secured and the doors latched.
17. Be sure all exterior doors are closed and locked.
18. Adjust the driver's seat to the most comfortable position, then adjust the side-view mirrors for maximum visibility.
19. Fill the fuel tank and be careful not to overfill. Your motor home is designed to use only the fuel recommended in the Chassis Operator's Manual.

WARNING: ALWAYS EXTINGUISH PILOT LIGHTS AND OPEN FLAMES ON APPLIANCES BEFORE FILLING YOUR GASOLINE TANK AND LP TANK.

WARNING: PORTABLE FUEL-BURNING EQUIPMENT, INCLUDING WOOD AND CHARCOAL GRILLS AND STOVES, SHALL NOT BE USED INSIDE THE RECREATIONAL VEHICLE. THE USE OF THIS EQUIPMENT INSIDE THE RECREATIONAL VEHICLE MAY CAUSE FIRES OR ASPHYXIATION.

WARNING: DO NOT BRING OR STORE LP-GAS CONTAINERS, GASOLINE, OR OTHER FLAMMABLE LIQUIDS INSIDE THE VEHICLE BECAUSE A FIRE OR EXPLOSION MAY RESULT.

Getting Ready to Leave

Note: Each person riding in or driving the motor home should be familiar with preparation and operation procedures and check lists. Your time on the road will be safer and more enjoyable if all persons are able to contribute; and that knowledge may be invaluable in case of an emergency.

The following suggestions may be helpful when you are getting ready to leave.

Starting and Warm-up

For best results, always follow the recommendations in your Chassis Operator's Manual when starting or operating your engine.


Note: Be sure the transmission is in PARK and the parking brake is engaged to keep the motor home from rolling. On some chassis, the parking brake is set automatically when you shift the transmission into PARK. If the parking brake needs service, see the Chassis Operator's Manual or consult an authorized chassis service center.

Safety Belts

Safety belts are an important safety feature of your vehicle. For your protection, it is required that all belts be fastened while your motor home is in motion. The driver's seat and all other seats designed to carry passengers, while under way, have been equipped with safety belts.

WARNING: SOME SEATS IN SOME MOTOR HOMES MAY NOT HAVE A SAFETY BELT PROVIDED. THESE SEATS ARE NOT INTENDED FOR USE WHILE THE VEHICLE IS IN MOTION. USE THEM FOR ADDITIONAL SEATING ONLY WHEN THE VEHICLE IS STATIONARY. THESE SEATS ARE DESIGNATED BY A TAG NEAR THE SEAT.

Safety belts on the driver's seat and the front passenger seat are retractable and self-adjusting. Simply make sure the belt is not twisted when coupling. The other safety belts are adjusted in the following manner: To

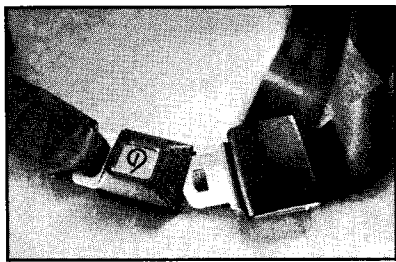

lengthen the belt, tip the buckle at right angles to the belt. Holding the buckle in this position permits the belt to slide through. Pull on the buckle until the de-

sired length is obtained. To fasten the belts, make sure the belts are not twisted, then push the tongue end of one belt into the buckle of the mating belt. Be sure it goes in all the way and that it latches. Tighten by pulling the loose end of the belt while holding the buckle. Adjust the belt as low on the abdomen and as snug as comfort will allow for greatest safety. Never use a belt for more than one person.

Note: If your belts have been equipped with retractors, be sure belt is pulled all the way out of retractor.

Electrical

Test your interior lights, electrical appliances, and automotive lights and accessories. Check for spare fuses of every size used in the vehicle.

Fuel (Liquid Petroleum, Gasoline, Diesel)

The Impulse runs on diesel fuel only. Most Cruise Airstreams and Encounters run on unleaded gasoline; however, some may be powered by a diesel engine. Liquid propane (LP) gas is required to operate the range, oven, water heater, and furnace. The refrigerator may be powered by either LP gas or electricity.

A generator is an optional feature. On a gasoline-powered motor home, the generator runs on gasoline from the same automotive fuel tank that supplies the engine. On a diesel-powered motor home, you may have a generator that runs on LP gas or one that runs on diesel fuel taken from the automotive fuel tank.

Before starting a trip, fill all the fuel tanks with the appropriate fuel.

Caution: Do not overfill the fuel tank. Overfilling can cause excessive pressure and poor engine performance. Stop filling the tank the first time that the automatic nozzle on the gas hose shuts off.

WARNING: LP GAS, GASOLINE, AND DIESEL FUEL ARE ALL EXPLOSIVE. READ AND HEED THE WARNING LABELS ATTACHED TO THE LP GAS TANK AND THE MOTOR HOME NEAR THE FUEL FILLER PIPE.

WARNING: BEFORE FILLING THE LP GAS TANK OR FUEL TANK, EXTINGUISH ALL PILOT LIGHTS AND OPEN FLAMES ON APPLIANCES; AND, OF COURSE, EXTINGUISH ALL MATCHES AND SMOKING MATERIALS.

Note: For your convenience, many, or all, appliances manufactured into a Georgie Boy motor home are equipped with automatic electronic ignition rather than pilot lights. However, since supplier components change from time to time, or accessory appliances may have been added to your motor home after manufacture, do not assume that is the case on all appliances. Learn which appliances have pilot lights and heed the above warning.


Driver's Compartment

Take the time before leaving to become familiar with the location and operation of the instrument control panel and other items in the driver's compartment.

Make sure that all automotive accessories and indicator lights are working. Refer to the Chassis Operator's


Manual for information regarding components which are installed by the chassis manufacturer.

Be comfortable behind the wheel. Adjust the seat and tilt steering wheel. After doing so, make sure the mirrors are aligned for maximum rear visibility. Re-adjust all of these for different drivers, if necessary.

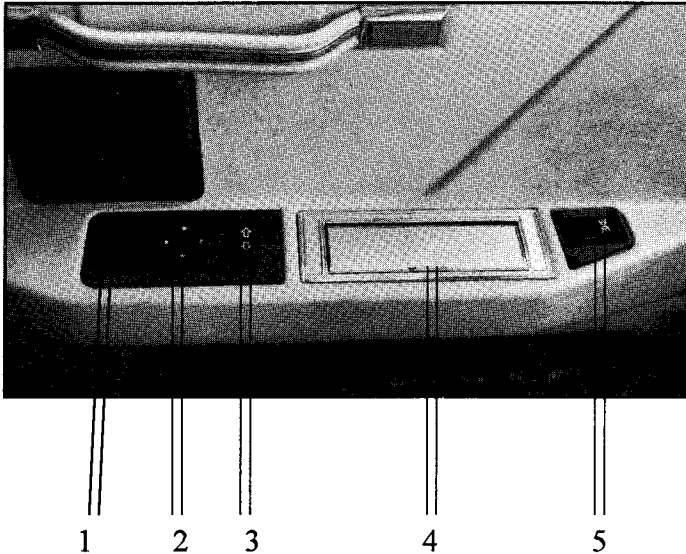

Encounter Driver's Arm Rest


1. Optional Heated Mirror
2. Optional Power Mirror Switch
3. Power Window Switch
4. Ash Tray
5. ICC Flasher

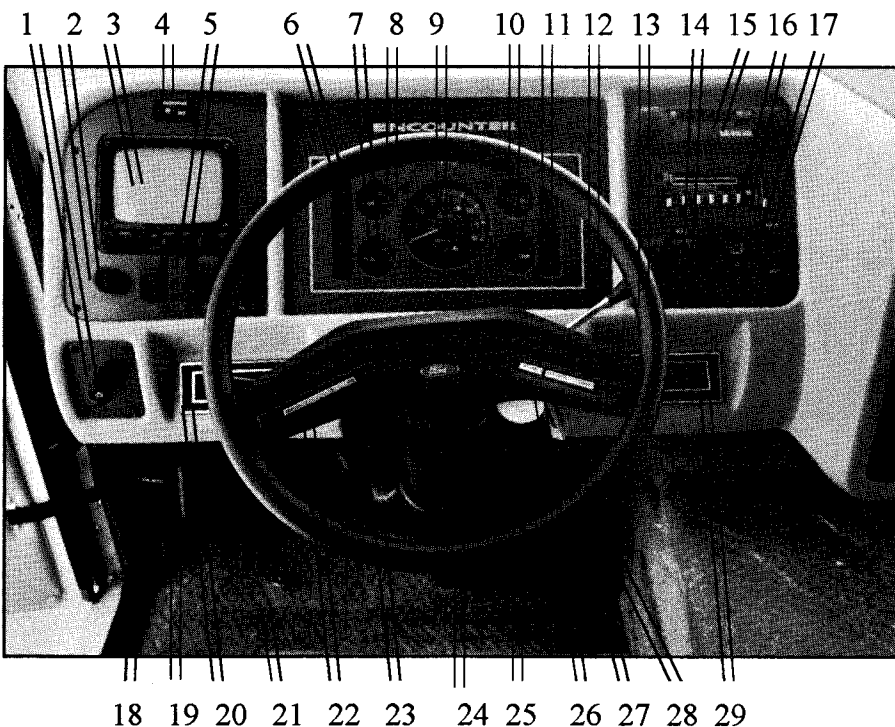

Encounter Driver's Compartment (Ford)


1. Light Switches
2. Windshield Wiper
3. Optional Backup Monitor
4. Overdrive Switch
5. Switches for Generator with Indicator, Aisle Lights, Emergency Start, and Air Horn
6. Engine Warning Indicators
7. Fuel Gauge
8. Volt Meter
9. Speedometer and Odometer
10. Oil Gauge
11. Temperature Gauge
12. Engine Warning Indicators
13. Gear Shift Lever
14. Switches for Fog Lights and Fans
15. AM/FM Radio with Cassette
16. Heater/Air Conditioner Controls
17. Controls for Optional Rear Spot Light
18. Emergency Brake Release Handle
19. Emergency Brake
20. Heating/Cooling Vent
21. Headlight Dimmer Switch
22. Cruise Control
23. Hood Release T-Handle
24. Steering Wheel
25. Ignition Switch
26. Cruise Control
27. Brake Pedal
28. Accelerator Pedal
29. Heating/Cooling Vent

Cruise Air Driver's Compartment (Ford)

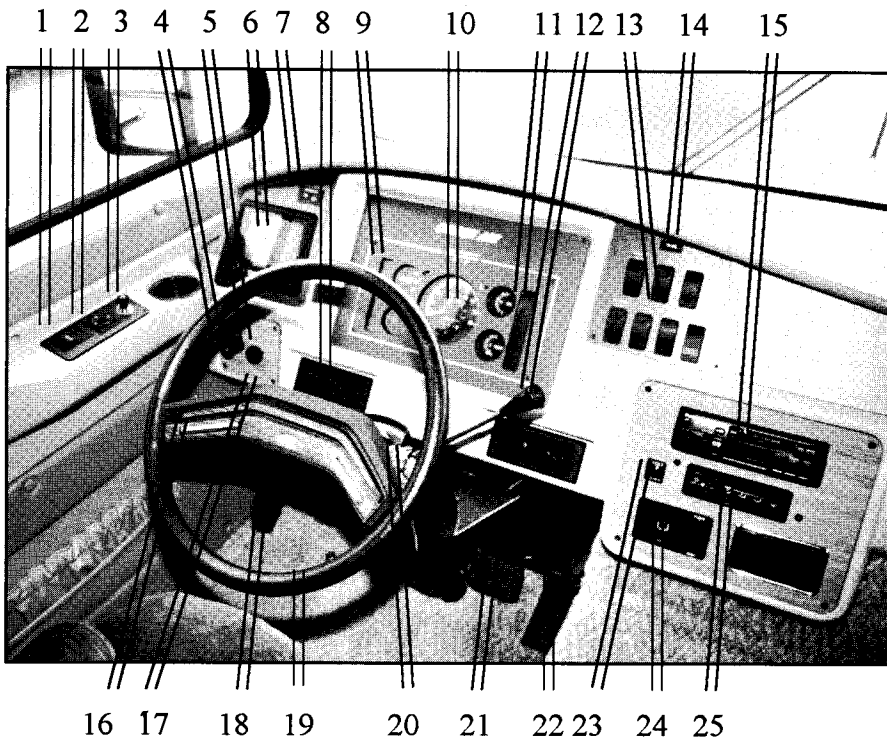

1. Power Window Switch
2. Power Mirror Switch
3. Cigarette Lighter
4. Light Switch
5. Windshield Wiper Control
6. Monitor for Backup Video Camera
7. Overdrive Switch
8. Heating/Cooling Vent
9. Engine Warning Indicators
10. Instrument Cluster: Amp Meter, Fuel Gauge, Oil Pressure Gauge, and Temperature Gauge
11. Engine Warning Indicators
12. Gear Shift Lever
13. Switches for Heated Mirror, Fan, Generator with Indicator Light, Running Lights, Aisle Lights, Emergency Start, and Air Horn
14. TV Antenna Warning Light
15. AM/FM Radio with Cassette
16. Cruise Control
17. Tilt Steering Wheel Control and Turn Signal Lever (on left side of steering column)
18. Parking Brake and Release
19. Steering Wheel
20. Ignition Switch
21. Brake Pedal
22. Accelerator Pedal
23. Spotlight Controls
24. Hydraulic Jack Indicator Light
25. Heater/Air Conditioner Controls


Impulse Driver's Compartment (Oshkosh)

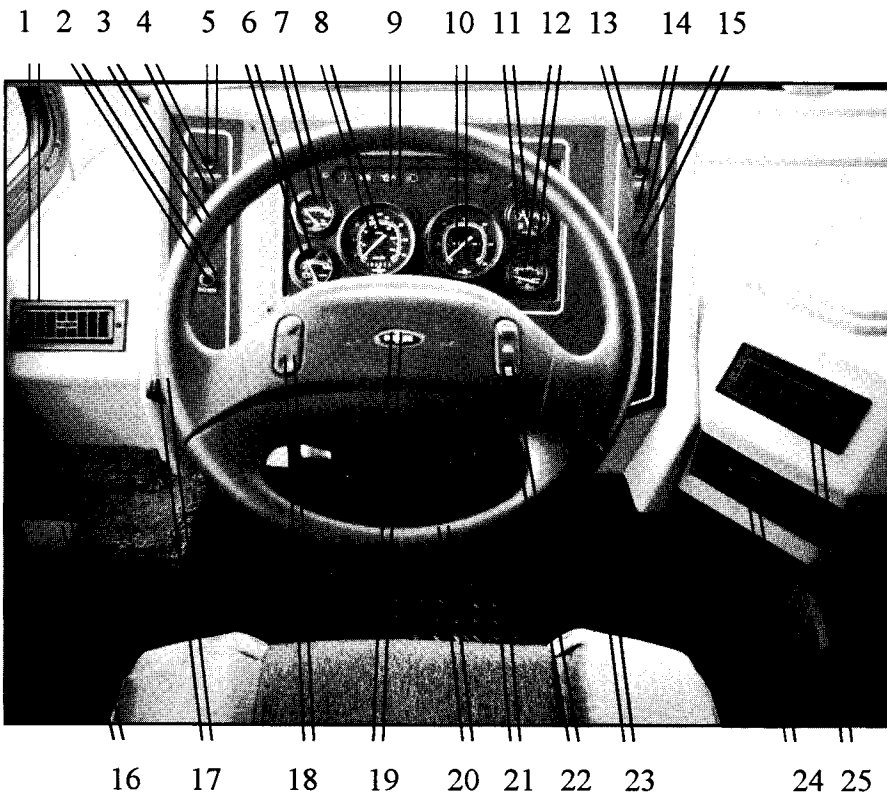

1. Heating/Cooling Vent
2. Hydraulic Jack Switch (optional)
3. Fan Switch (behind steering wheel)
4. Emergency Start Button
5. Dash Light
6. Volt Meter
7. Oil Pressure Gauge
8. Speedometer and Odometer
9. Panel for Engine Warning Indicators, Turn Signal Indicators, and Bright Light Indicator
10. Tachometer
11. Fuel Gauge
12. Temperature Gauge
13. Dash Light
14. Generator Starter Switch
15. Generator Indicator Light
16. Gear Shift Lever
17. Windshield Wiper Control
18. Cruise Control
19. Horn
20. Steering Wheel
21. Brake Pedal
22. Cruise Control
23. Accelerator Pedal
24. Heater/Air Conditioner Controls
25. Heating/Cooling Vent

NOTE: Ignition Switch is located on right side of steering column and Tilt Steering Wheel Control is located on the left side.

Hydraulic Jack Levers

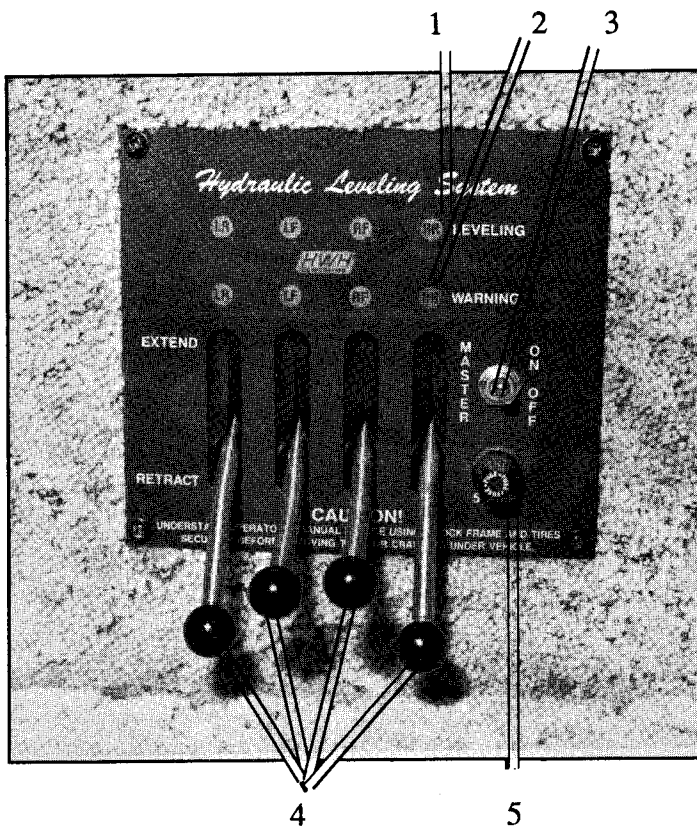

Typical Hydraulic Jack Levers

1. Green Lights Show which Jacks to Extend
2. Red Lights Indicate which Jacks Are Extended
3. Master Switch - Must Be ON for Operation
4. Up/Down Control for Each of Four Jacks
5. Fuse

On the Road

Driving and Parking

Driving the motor home is comparable to driving your family car once you become accustomed to the feel of the controls and to the reference points from the driver's seat relating to the position of the motor home in traffic. Be cautious when maneuvering to allow for the length and width of the vehicle. Always allow extra room in cornering and when changing lanes. Check the side mirrors often. Learn to use the view of the roadway behind, as seen through the side mirrors, as a reference to help keep a good road/lane position.

Drive with consideration, observe all applicable speed and safety regulations. The best cruising speed for your motor home will vary with road and weather conditions. Remember that the higher speeds may result in a sharp increase in fuel consumption.

Driving on winding or mountain roads is not difficult if done with reasonable care. Observe proper vehicle speeds when ascending or descending hills and always operate in the proper transmission range. Downshift on hills to avoid overheating or undue engine loads by using the hand control as recommended by the Chassis Operator's Manual.

Caution: If you are towing a vehicle or trailer with a Georgie Boy installed hitch, never exceed the maximum gross weight rating as listed on the tag on the hitch.

Allow for the extra height of your motor home and avoid areas having low overhead clearance. Check for low-hanging tree branches or other obstructions whenever you drive or park. Avoid low roofs when pulling in for service. This may be particularly important if you drive with the overhead vents open or if the motor home is equipped with a roof air conditioner or a roof rack.

Note: It is not advisable to drive with the overhead vents open; and you must not drive with the TV antenna in the raised position.

When parking parallel, be sure to allow for poles or obstructions near the curb, as front and rear portions of the motor home swing wider than an automobile. When parking on an incline, it is recommended that the front wheels always be turned into the curb in the direction of roll to aid the parking brake.

Engine Cooling System

The engine and cooling system on your vehicle should be operated and serviced as recommended in your Chassis Operator's Manual.

Per the chassis manufacturer's recommendations, check the coolant level, appearance, and strength periodically. Also, check hoses regularly for signs of damage or deterioration. Tighten hose clamps as necessary.

Replace hoses if they become hard and brittle and show signs of cracking or if they are abnormally soft, spongy, or swollen. Also, replace hoses that are flaking or show deterioration of the inner lining. Flaking particles can clog the cooling system, reducing its efficiency.

WARNING: ANTIFREEZE IS FLAMMABLE, DEPENDING ON PRESSURE AND THE PERCENTAGE OF MIXTURE WITH

WATER. FOR EXAMPLE, A SLIGHT LEAK IN THE COOLING SYSTEM CAN CAUSE POCKETS OF COOLANT TO COLLECT ON TOP OF THE ENGINE. ENGINE HEAT WILL CAUSE THE WATER IN THE MIXTURE TO EVAPORATE, LEAVING A HIGH CONCENTRATION OF FLAMMABLE ANTIFREEZE. AS THE ENGINE GETS HOTTER, DUE TO A LOSS IN COOLANT, THE ANTIFREEZE CAN BURST INTO FLAMES AND CAUSE AN ENGINE FIRE. THIS IS ESPECIALLY TRUE WHEN THE ENGINE IS IDLING BECAUSE OF DECREASED AIR FLOW AROUND THE ENGINE.

If you suspect a leak, replace the lost coolant with a 50/50 mix of antifreeze and water. Then, fix the leak as quickly as possible.

Caution: The Automotive Air Conditioner places an additional load on the vehicle's cooling system. If the engine runs abnormally hot, shut off the air conditioner until the engine cools down.

Note: After a long drive, let the engine run idle for a few minutes to gradually reduce the engine temperature.

Electronic High Temperature Engine Alarm

A dash decal will indicate units equipped with an electronic high temperature alarm. This alarm will sound an audible buzzer if the engine nears a temperature that can cause damage to engine components. If this buzzer should sound, immediately follow the instructions listed in the Chassis Operator's Manual under "Engine Cooling System Overheating". This alarm is not to be used as a replacement for the Chassis engine coolant temperature gauge but works in conjunction with the gauge.

Windshield Defrost - Comfort Control

During winter months in cold climates, it is important to keep the windshield clear and keep the passenger compartment at comfortable temperatures while on the road. This can be done by use of the proper combination of heater and defroster controls.

12-Volt Fuse Replacement

If part of your vehicle electrical system should fail while on the road, check the replacement circuit fuses located in the automotive circuit. These are automotive-type fuses available at most service stations. Refer to the Electrical section for information on living area 12-volt fuses.

Changing a Tire

For tire changing instructions, see the Chassis Operator's Manual. Your motor home is equipped with premium-grade truck-type tires. Under normal circumstances thousands of miles of trouble-free service.

Note: Changing a flat tire is best done by a skilled person with the necessary equipment. Your fully-loaded motor home is very heavy. Therefore, each wheel lug nut is torqued to a factory recommended setting, making the lug nuts extremely difficult to remove. In addition, each tire and wheel weighs approximately 90 pounds and is difficult to handle.

WARNING: LOOSENING THE REAR LUG BOLTS MAY RELEASE BOTH OUTSIDE AND INSIDE WHEELS. DO NOT ATTEMPT TO REMOVE LUGS WITHOUT HAVING A JACK IN PROPER POSITION TO ABSORB WEIGHT.

If the flat tire is on one of the inside (rear) dual wheels, the outside wheel on that side will give adequate support and no tire change may be required. Drive at reduced speeds ... no more than 25 mph ... to avoid overheating the single tire. Obtain assistance at the first service station.

ICC Flasher

This is a courtesy feature that allows you to blink your overhead running lights ON and OFF.

Tire Chains

Your motor home is not intended to be operated with tire chains.

Emergency Start Switch

Your motor home is equipped with an emergency start mechanism. If you have left your headlights on and run down the battery, you can get the engine running by using the emergency start switch. The 12-volt battery(ies) that powers the 12-volt circuit in the living quarters is mounted behind the front bumper next to your main automotive battery. The emergency start switch on the dash works like a built-in jumper cable that temporarily connects this auxiliary battery to the main automotive battery. Push the button to make the battery connection and, then, turn the ignition key. Release the button when the engine starts.

Leveling

When parking your motor home, choose a site that is as level as possible. If necessary, position pieces of wood in front of or behind the tire(s) that are lower than the others, and drive up onto the wood. Or you can level the motor home with the optional hydraulic leveling jacks if your unit is so equipped.

Caution: Failure to level the motor home can increase the difficulty of walking in your motor home and could lead to injury. Also the coolant in the refrigerator/freezer may not flow properly and result in improper operation of that appliance.

Tag Axle

If your motor home is equipped with an optional tag axle, there is an additional brake fluid reservoir located in the front passenger wheel well. Check the fluid level in this reservoir every time you check the fluid level in your primary brake reservoir.

Maintenance of Power Systems

Motor Home Chassis Operator's Manual

Refer to your Chassis Operator's Manual for information on chassis service recommendations. As a general practice, you should have the coolant, the battery electrolyte, and the engine oil levels checked at regular intervals.

Battery Service

Periodically check your main automotive battery and your auxiliary battery(ies) for proper charge, proper cable connections, and physical damage. Before starting on a trip, or after extended storage of the motor home, remove the battery cables, clean the terminal posts and cable connections, if needed, and apply a light coating of grease to prevent corrosion.

Radiator Service

Keep the proper amount of antifreeze/coolant in your radiator. When driving or storing the motor home in freezing temperatures, test the ability of the antifreeze to protect the engine and radiator from freezing. If necessary, drain weak antifreeze and replace with fresh antifreeze to protect well below anticipated temperatures. Refer to the recommendations in the Owner's Manual supplied by the chassis manufacturer.

Engine Service

Items serviced from the exterior of the motor home are reached through the front access door. This permits servicing the 12-volt batteries, the radiator and coolant system, the engine oil level and oil filler cap, the power steering reservoir, and the windshield washer reservoir. The Impulse engine battery is serviced from beneath the engine compartment.

On the Cruise Air and Encounter, the engine compartment cover, located between the driver's seat and passenger seat, gives access to the air cleaner and allows entry for major service.


When the engine is being serviced from inside the motor home, protect your carpet and furnishings against oil and dirt. Your serviceman will be glad to use a protective cloth if you remind him. The Impulse engine compartment is located below the rear bed.

Note: Proper engine servicing and record of servicing may be mandatory to ensure chassis warranty protection. Follow the manufacturer's instructions for periodic maintenance checks.

Engine Removal


Front engine removal on the Cruise Air and Encounter can be accomplished in one of two ways. The first is to drop it through the bottom of the chassis frame. The second is to lift it through the engine cover and out the passenger side window on the Cruise Air or the driver's entrance door on the Encounter.

Rear engine removal can also be accomplished in one of two ways. Either drop it through the chassis frame or take it out the rear engine door. Unbolt the bumper before removing the engine through the rear engine door.

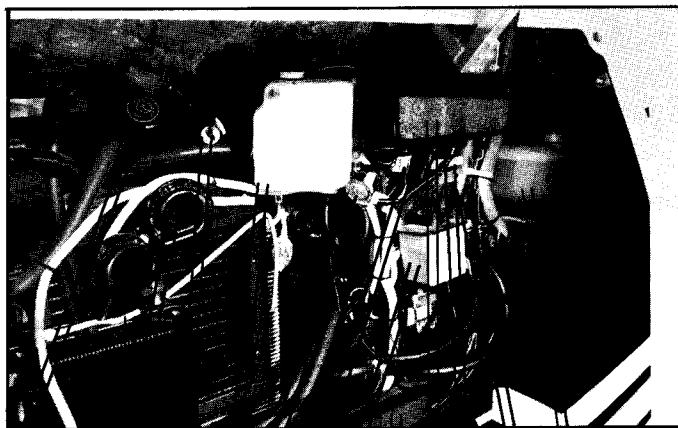

Typical Encounter Engine Service (Ford)

1. Engine Oil Fill
2. Horns
3. Engine Oil Dipstick
4. Radiator Fluid Reservoir
5. Radiator Filler Pipe
6. Battery Disconnect Relays
7. Power Steering Fluid Reservoir
8. Batteries (Under Flap)
9. Automotive Accessory Fuse Panel
10. Georgie Boy Mfg. Motor Home Number
11. Chassis Mfg.'s ID Number (V.I.N.)
12. Windshield Washer Fluid Reservoir

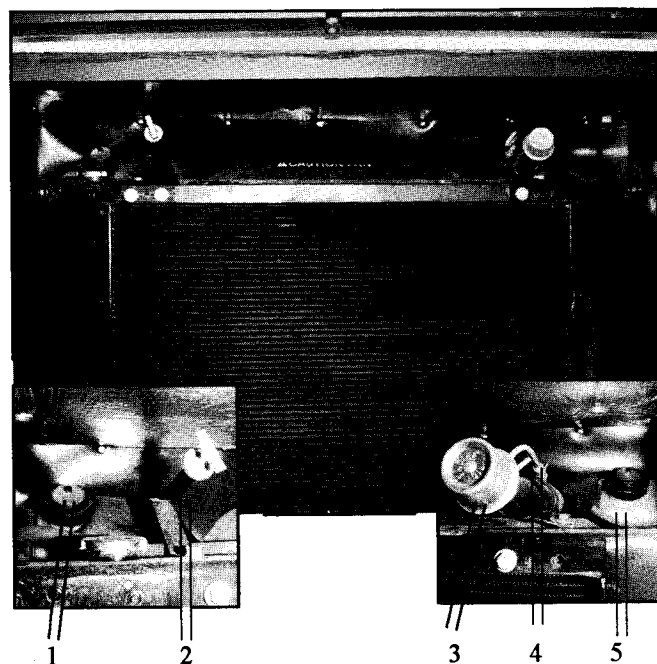


Typical Impulse Engine Service (rear of motor home)

1. Radiator Fluid Reservoir
2. Transmission Fluid Dipstick
3. Engine Oil Fill
4. Engine Oil Dipstick
5. Power Steering Fluid Reservoir



Typical Cruise Air Engine Service (Ford)

1. Engine Oil Dipstick
2. Engine Oil Fill
3. Horns
4. Serial Number
5. Radiator Fluid Reservoir
6. Radiator Filler Pipe
7. Automotive Accessory Fuse Panel
8. Main Engine Battery
9. Windshield Washer Fluid Reservoir

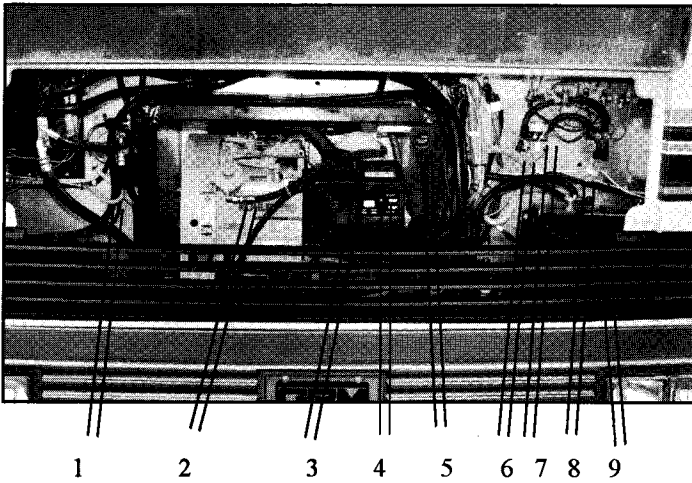

Typical Impulse Generator (front of motor home)

1. Auxiliary Battery
2. Generator
3. Start/Stop Switch
4. Circuit Breakers
5. Hour Meter
6. Automotive Accessory Fuses and Battery Disconnect Relay
7. Serial Number
8. Windshield Washer Fluid Reservoir
9. Auxiliary Battery

Generator Power Plant System Service


Generator power plant service, recommended by the generator manufacturer, should be performed at an authorized service center (listed in the material provided in your Owner's Information Kit). Routine or emergency service, such as adding oil, changing filters or replacing spark plugs, could be accomplished at auto service centers, but must be done in accordance with the service instructions specified by the manufacturer.

An hour meter is located either on the dash or the generator. This meter indicates the hours of running time on the generator. Keep track of this information in order to schedule proper generator maintenance.

Circuit breaker(s) on the generator protect the wiring between the generator and the main circuit breaker box. If you have reason to repair the generator, turn the breaker(s) on the generator to the OFF position while making the repair. If you don't, a power surge could damage electrical components inside the motor home.

Towing

If your motor home should ever need to be towed, it should be done by a competent towing service. When towing, they must use either a wheel lift or under reach unit to tow your motor home. Improper towing can cause damage to your motor home. Please use caution any time you need to be towed.

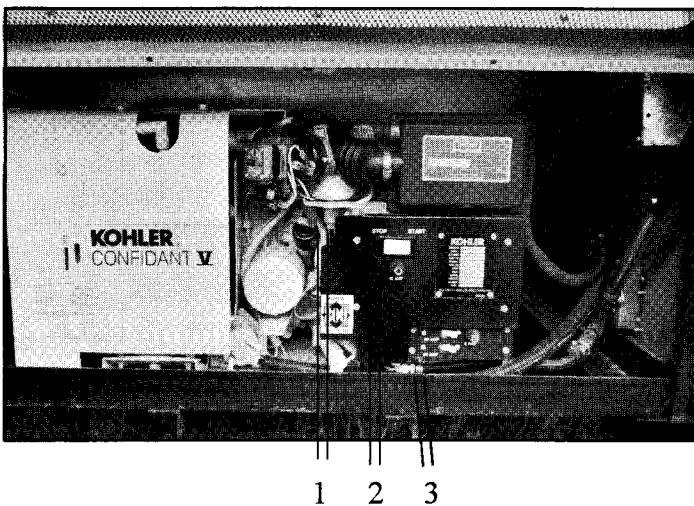

Typical Cruise Air and Encounter Generator (driver's side of motor home)

1. Oil Fill
2. Start/Stop Switch
3. Circuit Breakers

NOTE: Hour Meter is located on the dash

Electrical Systems

Your motor home has two electrical systems. One provides 115-volt power to operate all 115-volt living area receptacles and appliances. This system is used when power is available from an external power source or from an on-board generator power plant, if one is installed. The standard power rating for this 115-volt service is 30-amps. However, 50-amp service is an available option.

The second system uses on-board batteries or a 12-volt converter to provide power for all 12-volt lighting, appliances, and accessories as well as normal vehicle needs.

115-Volt System Power Supply Cord

A heavy-duty 50-amp power-supply cord is provided in the electrical compartment. When stationary, pull it out and connect it to any adequate power source to activate the power circuits. For optimum performance, use this power cord only with the proper mating connector and only with facilities having 50-amp capacity. Such facilities are available in most parks and grounds.

Note: If your motor home is equipped with two roof air conditioners, you will not be able to operate both of them simultaneously on only 20- or 30-amps of incoming power.



1 2 3 4 5 6

Typical Electrical Compartment

1. Generator Receptacle
2. 115-Volt Circuit Breaker Panel
3. 30-Amp Power Cord
4. 12-Volt Converter Fuse Panel
5. 12-Volt Converter (may be located in the neighboring storage compartment, as shown, or adjacent to the other electrical components)
6. Cable TV and Telephone Jacks

Caution: Using your power cord with power supplies which have less than the rated capacity or using the plug with receptacles for which it was not designed, may damage your appliance and make the warranty inapplicable.

Caution: Make sure the main circuit breaker on the 115-volt circuit breaker panel is in the OFF position while plugging or unplugging the 50-amp cord. This protects your major electrical appliances from power surges during plugging and unplugging operations.

Generator Receptacle

If your motor home is equipped with a generator, obtain power from the generator by plugging this same 50-amp power cord into the generator receptacle in the electrical compartment. When plugged in this manner, the generator provides 115 volts and 50-amps of power to your electrical circuits. This is especially nice if you want to operate your roof air conditioner(s) while travelling.

Generator

The electrical generator, if you have chosen one, is most often located in a special compartment below the motor home floor and behind the driver's entrance door. The compartment is sound insulated and constructed to prevent vapors from seeping into the living area. However, be aware that it is possible that, with certain wind conditions, fumes from the generator exhaust pipe could enter the motor home through open windows. On the Impulse, the optional electrical generator is located behind the front hood door.

Starting the Generator

The generator can be started by a switch on the generator itself or through a remote start system. One remote switch is on the component monitoring system in the kitchen. And there is also a remote switch on the dash instrument panel. Both of these remote switches have indicator lights so that you can tell when the generator is running.

To start the generator, hold the switch in the START position until the unit starts, DO NOT hold the switch in the START position for more than 10 seconds. Release the switch, wait 15 seconds, then repeat. This will help avoid overheating the generator starting

motor and may prevent damage to the starting system. If this system fails to start, the generator manual starting instructions are indicated in the General Power Plant Manufacturer's Instructions. To stop the unit, hold switch to the STOP position until the engine stops operating. Be sure switch does not stick and returns to neutral position. For a diesel generator, please see generator owners manual for cold weather starting instructions.

WARNING: ALL WINDOWS AND DOORS SHOULD BE CLOSED ANYTIME THE GENERATOR IS RUNNING.

Note: Refer to the Generator Power Plant Manufacturer's Instruction Manual for service information before starting the generator.

Note: Do not start unit with a heavy power load. Always wait at least three minutes after starting generator before turning on (or plugging in) heavy electrical loads. (Example: When optional roof air conditioner is installed.)

Generator Fuel

On a gasoline-powered motor home, the generator operates on gasoline taken from the automotive fuel tank. The generator is fed by a special tube which is higher in the tank than the feeder tube to the motor home engine. This is to prevent immobilizing the motor home by accidentally permitting the generator to run the fuel tank dry.

On a diesel powered motor home, the optional generator operates on liquid propane gas from the LP tank or diesel from the fuel tank.

Refrigerator/Freezer

The refrigerator/freezer is powered by both electricity and LP gas. Consult the refrigerator manual for operating instructions.

When stationary, make sure the motor home is level in order to obtain optimum cooling performance from the refrigerator/freezer.

Electrical Appliances

Roof Air Conditioner

Your motor home may have one or two air conditioners installed on the roof which use 115-volt power from the generator power plant or from the external power source. When two roof air conditioners are

installed, both should not be used at the same time unless 50 amps of power is being obtained from either the generator or an external power source.

Caution: If the air conditioner is switched off for any reason, wait a few minutes before starting it again to avoid overloading circuit breakers.

When the air conditioner is not being used, always keep controls in deactivated position (Warm Off) to reduce unnecessary circulation of refrigerant.

For best results, carefully follow all instructions provided by the air conditioner manufacturer with regard to operation and maintenance.

Keep air filter screen clean and working properly, especially in dusty or dry areas.

12-Volt Batteries

When the power supply cord is not connected to a 115-volt external power source or the generator, power for lights and 12-volt appliances is automatically provided from the auxiliary battery. This system may include one or two auxiliary batteries, depending on model.

A voltage converter is installed in your electrical system to automatically convert electrical appliances and lights for 12-volts or 115-volts of electricity, depending on which voltage is available.

Extended use of the 12-volt auxiliary batteries will drain them of power. However, if not drained too far, they will be recharged automatically when power is supplied by a 115-volt source. They will also be recharged by the automotive alternator while the engine is running.

This 12-volt battery(ies) is most often located beside the main automotive battery behind the front hood door. It also provides power for jump-starting the automotive battery if it should ever go dead. In rear engine motor homes, the batteries will have different locations.

WARNING: DO NOT STORE ANYTHING NEAR EITHER THE MAIN ENGINE BATTERY OR THE AUXILIARY BATTERIES. ALSO, DO NOT PLACE ANY TOOLS ON THE BATTERY(IES). THESE ITEMS COULD CAUSE AN ELECTRICAL SHORT CIRCUIT, DRAIN POWER FROM THE BATTERIES, CAUSE AN EXPLOSION WHICH WOULD SPRAY BATTERY ACID, AND/OR START A FIRE.


Caution: Do not store items near the voltage converter in the electrical compartment. The converter could overheat and fail to function properly or become damaged.

for easy access.


Note: If a fuse, circuit breaker, or fusible link replacement is necessary, replace with one of the same amperage. All firewall circuit breakers can be reset.

12-Volt Fuses

The fuses for the 12-volt electrical system are located

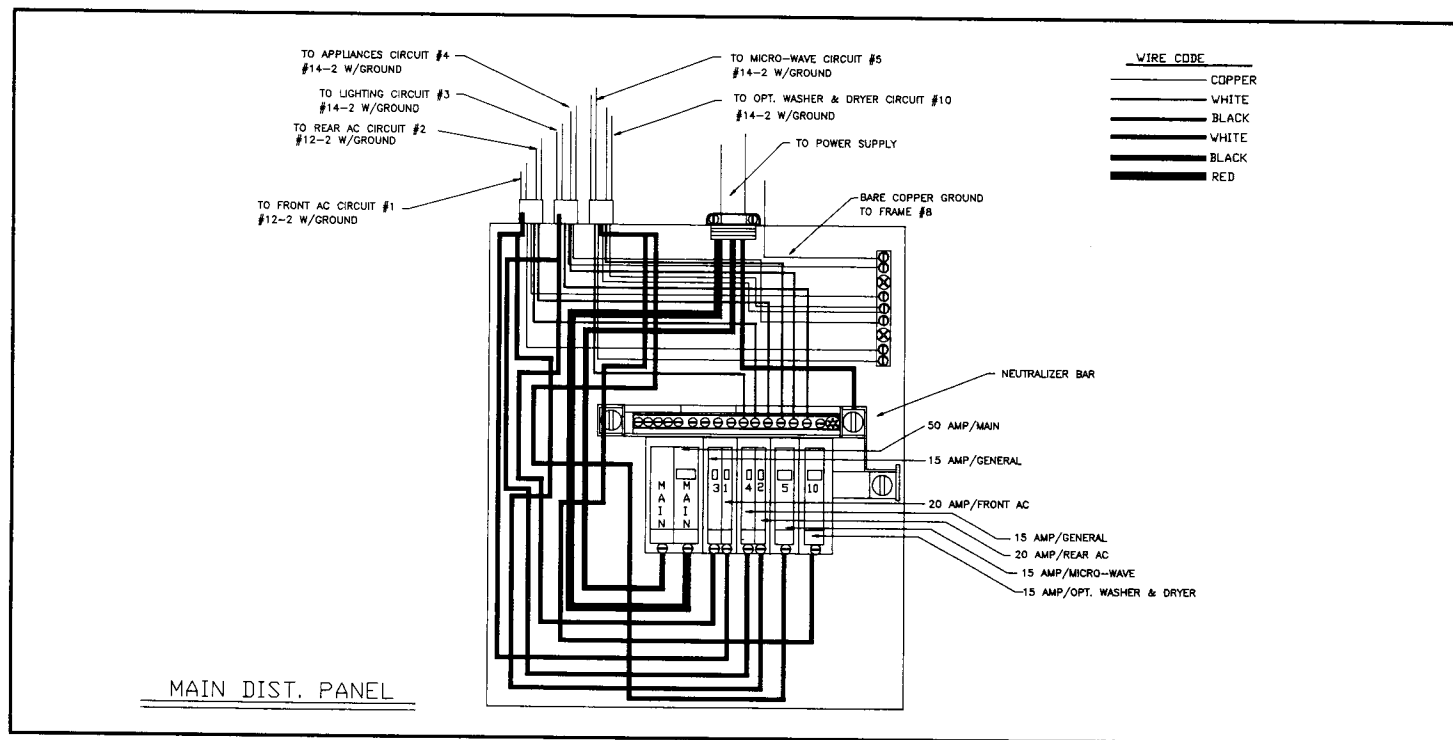


Typical 115-Volt 50-Amp Electrical Circuit

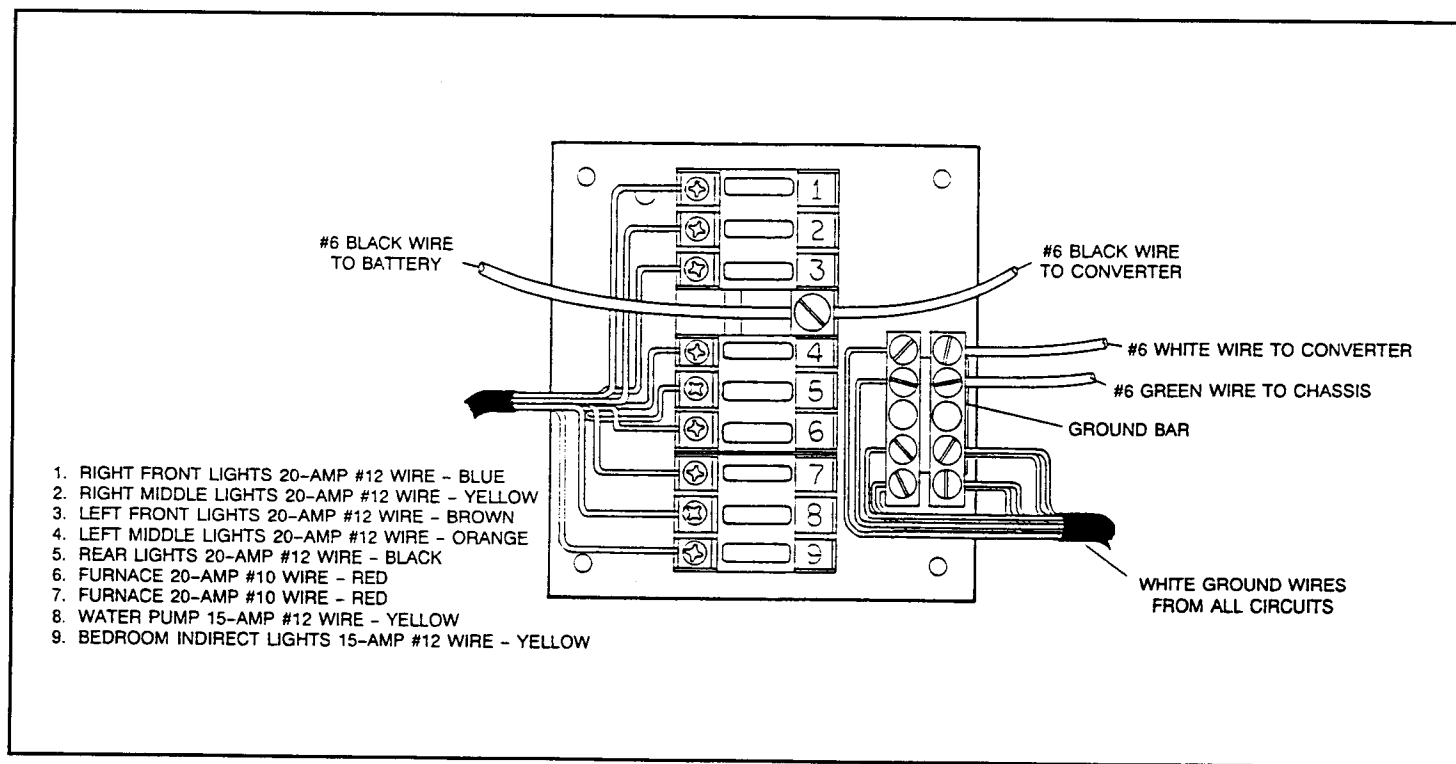

Typical 12-Volt Power Converter Fuse Panel

- 1-TV ANTENNA
- 2-ELECTRIC STEP
- 3-TV RELAY
- 4-HEATED MIRRORS
- 5-DEFROST FANS
- 6-REMOTE MIRRORS
- 7-REFER (DOMETIC)
- 8-REAR HEATER
- 9-POWER WINDOWS
- 10-C.B. RADIO
- 11-BACK-UP CAMERA
- 12-BATTERY DISCONNECT
- 13-LEVELER JACKS
- 14-HEATER
- 15-FANS (CHEVY ONLY)
- 16-AIR HORNS
- 17-C.B. RADIO
- 18-FOG LIGHT
- 19-ELECTRIC STEP
- 20-BURGLAR ALARM
- 21-AIR HORN
- 22-SERVICE LIGHTS
- 23-----
- 24-TRUNK LIGHTS
- 25-EMERGENCY START
- 26-CIG. LIGHTER
- 27-SPOT LIGHT
- 28-ELECTRIC STEP
- 29-T.V.
- 30-T.V. ANTENNA AMP.
- 31-RADIO MEMORY
- 32-RADIO

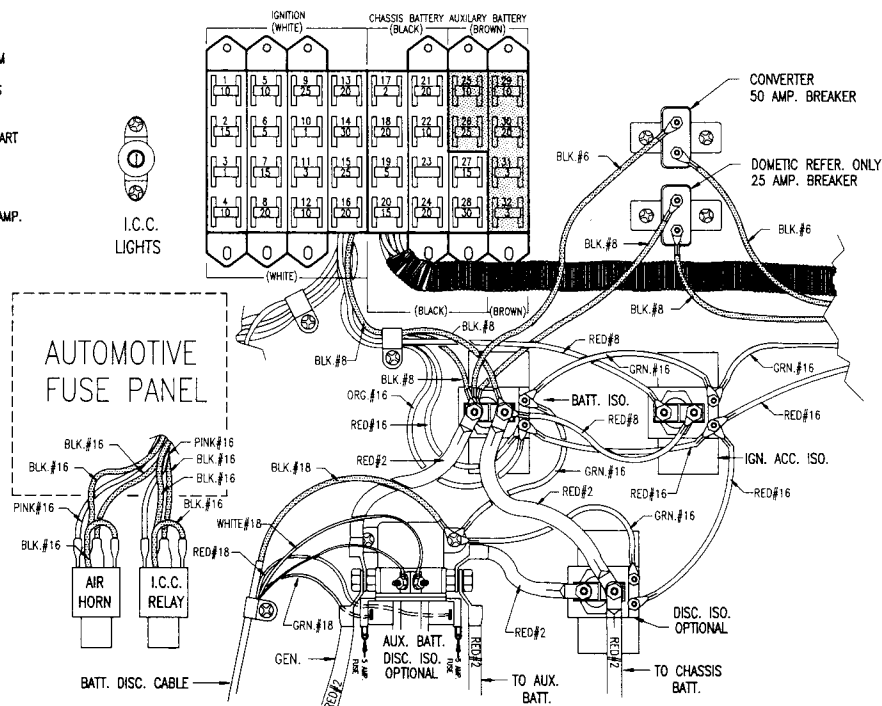

Typical Automotive Electric Circuit for Encounter

Liquid Petroleum Gas System

WARNING: LP GAS CONTAINERS SHALL NOT BE PLACED OR STORED INSIDE THE VEHICLE. LP GAS CONTAINERS ARE EQUIPPED WITH SAFETY DEVICES WHICH RELIEVE EXCESSIVE PRESSURE BY DISCHARGING GAS INTO THE ATMOSPHERE.

Liquid Petroleum (LP) gas is the energy source for your range, oven, furnace, and water heater. It is also an alternate power source for your LP gas/electric refrigerator.

LP gas is a colorless gas, but is stored under pressure as a liquid. It is commercially available under such brand names as Butane, Propane, or others. Though odorless in a natural state, LP gas is artificially odorized to smell like garlic for easy detection in the event of a leak. The gas and the tank in which it is stored are safe and convenient, provided sensible precautions are followed.

Caution: Be aware that travel vibrations can cause the LP gas tank and fittings to loosen, resulting in

leaks. Ask your authorized dealer to inspect the tank and fittings at least once a year and after every extended trip. You can also check for leaks by applying soapy water to all fittings and the welds on the mounting brackets. If you discover a leak, extinguish all nearby flames, tighten the fitting(s), and test with more soapy water. If the leak persists, close the shut-off valve and seek immediate repair from an authorized dealer.

LP Gas Tank

The LP gas tank is in a compartment on the passenger side near the passenger entrance door.


Caution: LP gas is flammable and potentially explosive. Use proper handling, lighting and ventilating procedures. As a gas, Liquid Petroleum is heavier than air and will dissipate if ventilation is provided to permit a downward flow.

WARNING: LP GAS REGULATORS MUST ALWAYS BE INSTALLED WITH THE DIAPHRAGM VENT FACING DOWNWARD. REGULATORS THAT ARE NOT IN COMPARTMENTS HAVE BEEN EQUIPPED WITH A PROTECTIVE COVER. MAKE SURE THAT REGULATOR VENT FACES

DOWNWARD AND THAT COVER IS KEPT IN PLACE TO MINIMIZE VENT BLOCKAGE WHICH COULD RESULT IN EXCESSIVE GAS PRESSURE CAUSING FIRE OR EXPLOSION.

The chassis-mounted tank has four controls; gas pressure regulator, vapor withdrawal (service) valve, fill valve, and gauge. To provide LP gas to appliances, first open the vapor withdrawal service valve all the way (counterclockwise) then close it 2/3 of a turn. When all LP gas systems are not in use, close the valve all the way.

Caution: Do not use pliers or a wrench to tighten valves. If a valve is not leak-tight when closed by hand, see your LP gas service representative. Extinguish all pilots and open flames, stop the engine and stop the auxiliary power generator, if installed, before filling LP gas tanks or fueling your vehicle tanks. Pilots and open flames should be extinguished when the vehicle is underway and, by regulation, must be extinguished in certain areas such as tunnels or restricted areas. Check ahead to areas where you plan to travel to determine any special regulations which may apply.

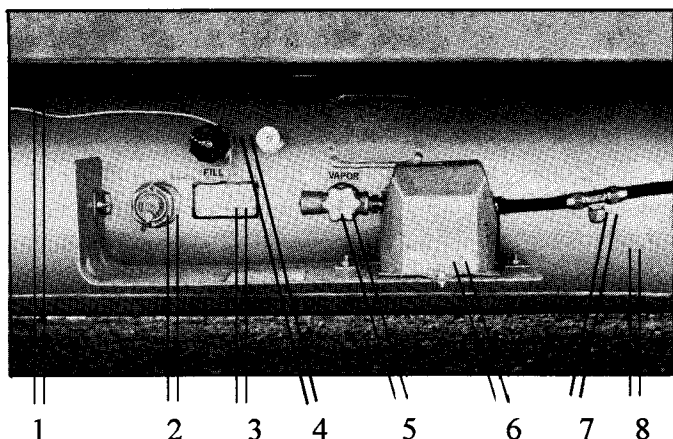

Typical Liquid Petroleum Gas Tank

1. Electrical Lead to Component Monitoring System
2. Fuel Level Indicator and LP Gauge Sender
3. Warning Label
4. Fill Valve
5. Shut-Off Valve
6. LP Regulator
7. Gas Line to Appliances
8. LP Gas Tank

Filling the Chassis-Mounted LP Gas Tank

A WARNING LABEL HAS BEEN LOCATED NEAR THE LP GAS CONTAINER. THIS LABEL READS IN PART:

“DO NOT FILL CONTAINER(S) TO MORE THAN 80 PERCENT OF CAPACITY.”

OVERFILLING THE LP GAS CONTAINER CAN RESULT IN UNCONTROLLED GAS FLOW WHICH CAN CAUSE FIRE OR EXPLOSION. A PROPERLY FILLED CONTAINER WILL CONTAIN APPROXIMATELY 80 PERCENT OF ITS VOLUME AS LIQUID LP GAS.

Drive the vehicle to an LP gas supplier or one of the service stations which sell LP gas to have the tank filled. Look under Gas, Liquefied Petroleum, Bottled and Bulk, in your classified directory or refer to the service directory available at your dealer. For additional information, refer to instructions for your gas appliances provided in your Owner's Information Kit.

LP Gas System Leak Checks

For your safety, check for leaks in your gas system each time that tank is filled or before each trip. Always check the system any time the odor of garlic is detected. To perform a leak check, open the tank valve and spread a soap-bubble solution over all connections. Escaping gas will create visible bubbles to show the location of any leak.

WARNING: NEVER CHECK FOR LEAKS WITH AN OPEN FLAME. IF THE LEAK CANNOT BE LOCATED, TAKE THE UNIT TO AN LP GAS SERVICE REPRESENTATIVE.

Keep the tank valve closed and turn OFF all appliances if the unit is not being used.

Using your LP Gas System at Low Temperatures

Your gas system will function well at low temperatures provided the components are kept at a temperature above the boiling point of the gas.

Note: Butane boils or turns to a gas about 32° F. and propane boils at about -42° F. Since butane boils at a temperature above zero and propane boils at a temperature below zero, do not fill your tank with butane in a warm climate then drive your motor home to a cold climate.

The following are suggestions to keep gas appliances working smoothly:

1. Choose a type of LP gas which has a boiling point lower than any temperature you expect to encounter. Ask your LP gas supplier or your motor home dealer for information on products available in your area.
2. If outside temperatures get below the boiling point of the LP gas in your system, keep exposed area (such as the tank, regulator and lines) at a higher temperature with a protective cover.
3. Keep the system free from water vapor which may turn to ice in lines and regulators. Commercial additives such as dry methyl alcohol, added to the LP gas tank, can help avoid water condensation in the regulator and the lines. Ask your LP gas supplier or your Georgie Boy dealer.

If, despite precautions, the gas flow to your appliance should fail at low temperatures, the stoppage may be due to ice in the LP gas regulator as a result of condensed moisture. Try melting the ice by warming the regulator; using a small light bulb on an extension cord. **DO NOT USE AN OPEN FLAME.** Once flow is restored, it may be necessary to protect the regulator or continue to provide a little heat in order to keep the moisture from freezing again. If the problem persists, ask your LP gas supplier to service the tank or regulator by removing the moisture or adding an ice-inhibitor as required.

Manometer Gauge

A manometer gauge is an instrument for checking the pressure of a fluid. A manometer gauge is installed in the kitchen area so that you can easily make sure the LP gas has the proper pressure for safe operation. For safe operation, the needle should point at the green area.


Double-check the accuracy of the gauge and your LP pressure every time you refill the LP tank. To do this:

1. Turn all appliance pilots and valves to the OFF position.
2. Turn the main gas valve of the LP tank to the OPEN position momentarily then turn off tightly.

(At this time, you could experience a high reading, this is normal.)

3. Monitor the manometer gauge for a minimum of 30 minutes. There should be no drop in pressure.
4. Open a range burner valve, release the pressure, and reclose the burner valve.
5. Monitor the manometer gauge for an additional 30 minutes. There should be no pressure indicated during this time.

If any of the above checks are not as instructed, **DO NOT USE** the LP system. Turn the main valve on LP tank to the OFF position. Contact the nearest LP service station or your local Georgie Boy dealer for repairs.

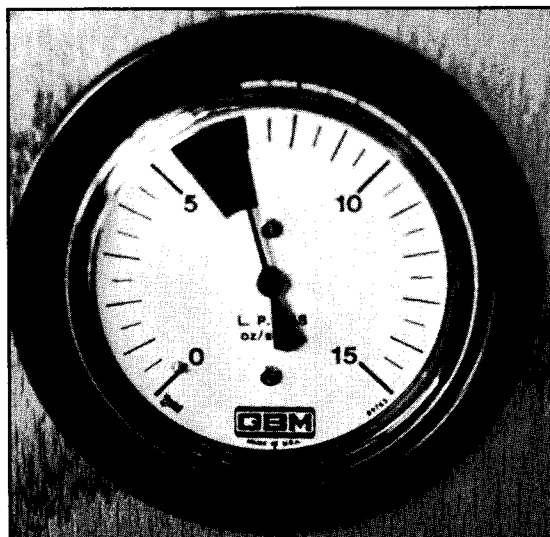

LP Gas Appliances

Your range top and oven, furnace, and water heater with the motor home. All information relating to your appliances should be kept readily available for easy reference.

Note: Be sure to fill out and mail the warranty registration cards on all appliances as soon as possible.

It is important to carefully follow all operating and lighting instructions, provided on or near each appliance (or in your Owner's Information Kit). For the initial lighting of an LP gas appliance, it may be necessary to purge the LP gas supply line of air before the appliance will light. To purge a line, open a burner or a pilot valve and hold a flame near the burner. Allow

time for air to escape. The time will vary depending on the distance the appliance is located from the LP gas tank. After several seconds, the gas should ignite and burn steadily.

WARNING: ALWAYS EXTINGUISH PILOT LIGHTS AND OPEN FLAMES ON APPLIANCES BEFORE FILLING YOUR GASOLINE TANK AND LP GAS TANK.

WARNING: THE FOLLOWING LABEL HAS BEEN PLACED IN THE VEHICLE NEAR THE RANGE AREA:

IF YOU SMELL GAS:

1. **Extinguish all open flames, pilot lights, and all smoking materials.**
2. **Do not touch electrical switches.**
3. **Shut off the gas supply at the tank valve(s) or gas supply connection.**
4. **Open doors and other ventilating openings.**
5. **Leave the area until the odor clears.**
6. **Have the gas system professionally checked and leakage source corrected before using again.**

Range Top and Oven

WARNING: IT IS NOT SAFE TO USE COOKING APPLIANCES FOR COMFORT HEATING.

Unlike homes, the amount of oxygen supply is limited due to the size of the recreational vehicle, and proper ventilation when using the cooking appliance(s) will avoid dangers of asphyxiation.

The range top and oven in your motor home are provided with a vent or range hood. The hood has a power vent fan. Always use the fan when using the oven or range top in order to ensure adequate ventilation. When cooking for long periods of time with a large number of people in the home, it may be desirable to open a window or a roof vent slightly to further increase ventilation level.

When igniting the oven, note that the type of heat-actuated ignition control used for the main oven burner may result in a normal delay of a few seconds, after the oven control knob is turned ON, before the main oven burner ignites. Anticipate approximately five seconds delay for the burner to ignite. If it doesn't ignite within five seconds, turn the control knob OFF and check the gas supply. Refer to the appliance manual further for instructions.

Caution: Do not use open flames, such as the oven or range top, to warm the living area because gas combustion consumes the oxygen inside the home.


Forced Air Furnace

Your motor home is equipped with the a forced-air ducted circulation system. The temperature can be regulated at the wall-mounted thermostat. The furnace will keep room temperatures at a comfortable level by activating fan and gas controls as temperatures inside the motor home vary. Refer to information on lighting, operation, adjustment, and service on the furnace case and in the appliance manual.

When storing the motor home, turn the thermostat and the fan to the OFF position. Failure to shut off the fan may result in excessive drain on, and damage to, the auxiliary battery.

Water Heater

Your motor home is equipped with an LP gas fueled water heater. The heater is a storage type much like that in your home. There is a thermostatic control on the heater to maintain the water temperature within a preset range.

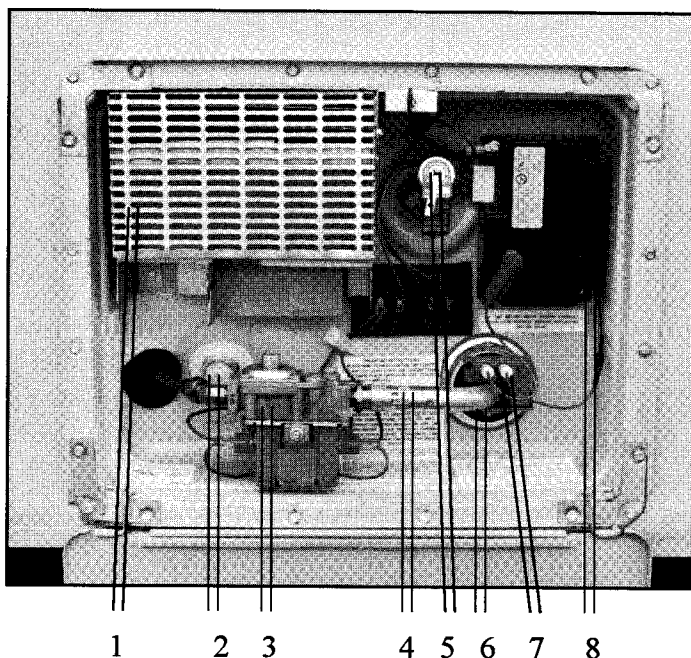

Water Heater

- | | |
|-----------------|-------------------------------|
| 1. Burner Vent | 5. Pop-Off Valve |
| 2. Drain Valve | 6. Burner Assembly |
| 3. LP Gas Valve | 7. Igniter |
| 4. Venturi Tube | 8. Electronic Ignition Module |

The hot water heater has an electronic ignition. To ignite the heater, press the hot water heater switch on the component monitoring system in the kitchen.


Before igniting the water heater, make sure that it is filled with water by turning on a hot water faucet such as the one at the galley sink. If water is supplied from the on-board fresh water tank, the pump must be ON. If water flows continuously, the heater is full of water. If water does not flow (and pressurized water is available), leave the faucet open until the tank fills.

For complete operating instructions, refer to the manufacturer's instruction manual or see the instructions under the heater access panel.

Models with optional pre-heat only operate the pre-heat portion while the vehicle engine is running.

LP Gas/Electric Refrigerator

Your refrigerator will operate on electricity or LP gas. Consult the operating instructions furnished by the manufacturer in the manual. Before operating the refrigerator, be sure the motor home is level. If it is not level, circulation of the refrigerant may be blocked by liquid accumulated in the condenser coils and cooling action could stop. Check the level of the refrigerator by placing a bubble-type leveling device (available from your dealer) on the freezer shelf. Level the motor home with jacks and/or blocking under the wheels. (See leveling instructions.)

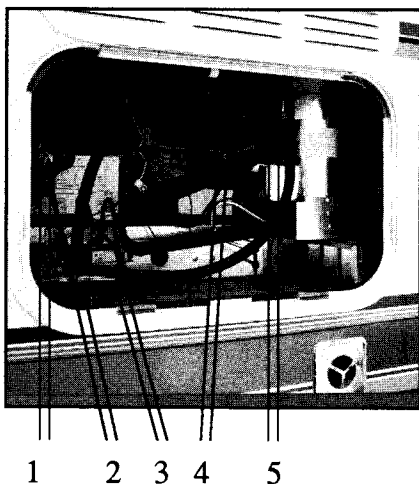

Refrigerator Vent

1. 115-Volt Electrical Power Supply
2. LP Gas Power Supply
3. 12-Volt Electrical Power Supply
4. Coolant Reservoir
5. Coolant Coils

Note: Unlike most household refrigerators, the refrigerator will be completely silent when operating on electric power.

Your range top and oven, furnace, and water heater operate on LP gas, while your refrigerator can operate on either LP gas or electricity. Warranty certificate registration cards, service instructions, and other information are included in the Owner's Information Kit provided with the motor home. All information relating to your appliances should be kept readily available for easy reference.

Note: Be sure to fill out and mail the warranty registration cards on all appliances as soon as possible.

Plumbing Systems

Fresh Water

Fresh water is provided from one of two sources:

1. City water, provided under pressure when the motor home is hooked up to a park or city water supply.
2. Water stored in an on-board water tank with pressure provided by a pump operating automatically from your 12-volt electrical system.

External Water Supply

When camped in a park or near a city water supply, connect the water supply to the motor home as follows:

1. Turn water pump switch inside the motor home to OFF.
2. Remove protective cap over city water inlet pipe on your motor home.
3. Connect a standard garden hose to the motor home inlet and to the city water supply line.
4. Turn city water supply valve to ON.
5. Let the water run a few minutes with your supply line attached to clean the lines.

Caution: Both the on-board pump and on-board fresh water tank are now isolated from the water pressure in the system. Do not turn pump on until pressure line is disconnected to avoid damaging the pump.

Use the following procedure to disconnect the city water supply:

1. Turn the city water supply valve to the CLOSED position.
2. Disconnect the garden hose from the motor home inlet connection and replace inlet pipe protection cap. Store the garden hose in the space available in the holding tank compartment.

Filling Fresh Water Supply

The on-board fresh water supply in your motor home provides fresh water automatically to all systems whenever a faucet is opened. Pressure is provided by a 12-volt DC automatic self-priming pump which functions any time power is available and the pump switch is ON.

Filling the fresh water tank is very easy and convenient. While the garden hose is connected to the water inlet, turn the water tank fill valve 1/4 turn until the on-board fresh water tank is filled. Then turn the valve back to its normal position. You can determine when the water tank is full by either monitoring the indicator lights on the component monitoring system or by observing water drain onto the ground from the overflow tube.

Caution: Do not run the pump without water in the system. Always keep the switch off when the water system is empty of water or when connected to city water. Running the pump when dry can damage it and may make the warranty inapplicable.

WARNING: USE ONLY POTABLE (DRINKING QUALITY) WATER IN THE TANK. TO ENSURE CLEAR, FRESH WATER, DRAIN TANK AFTER USING. FLUSH AND DRAIN BEFORE EACH USE AND SANITIZE IF SYSTEM SEEMS TO GIVE WATER A TASTE. SEE DIRECTIONS FOR SANITIZING THIS SYSTEM.

Troubleshooting the Water System

During normal use, your pump should operate automatically (if power is provided and the pump switch is ON) whenever a faucet is turned on. Should your on-board water supply fail to function when a faucet is opened, check to see that the pump switch is ON and make sure that your Fresh Water tank contains water. If the switch is ON, check the fuse. If no pressure is available, although the pump switch is ON, power is

available and the pump fuse is intact, refer to the information provided by your water pump manufacturer for instructions.

If the water pump continues to operate when no water is being used, there may be a leak in the system or in a faucet. If no leak is found and the pump continues to operate, refer to the information provided by the water pump manufacturer for additional checks.


Caution: When storing the motor home in freezing temperatures, be sure that all water system components, including the storage tank are drained or protected by a special type of nonfreezing additive if the vehicle is to be left unheated.

Winterizing the Water System

If the motor home is to be stored in temperatures below freezing, the fresh water and waste systems should both be winterized. We have installed a water blow-out feature to aid in this process.

1. Turn the water drain valve located directly below the water inlet. Hold the drain valve open until water ceases to flow from the water holding tank.
2. Open hot and cold faucets inside the motor home.
3. Open the hot water heater drain plug located inside the water heater access door.
4. Open the two drain valves on the water pump in the holding tank compartment.
5. Locate the air valve attachment stored in the holding compartment, and attach it to the water inlet.
6. Using a pressurized air hose, force air pressure into the water lines.
7. Continue applying air pressure until only air comes out of the faucets, the drain on the water heater, and the drains on the water pump. Then stop applying the air.
8. Drain the toilet and flush any remaining water into the waste water holding tank.
9. Pour 1/2 cup of RV antifreeze in each drain in the kitchen sink, bathroom vanity, and shower.

After completing the above procedure, drain the waste water holding tanks as described below.

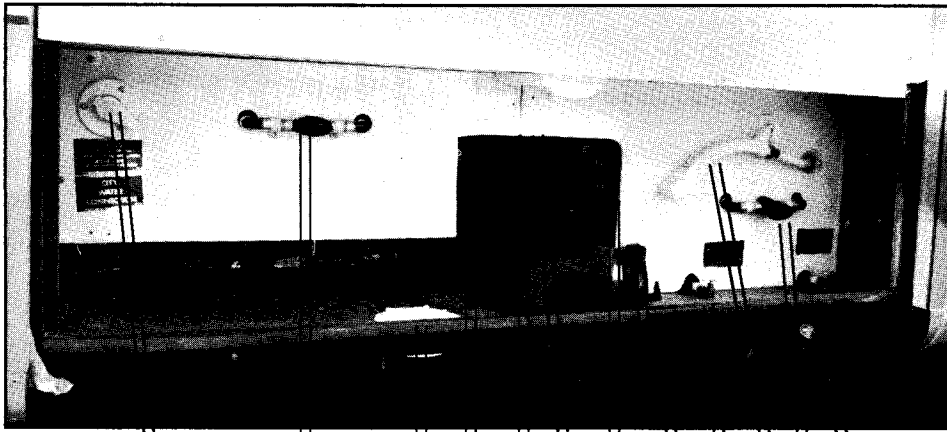

1 2 3 4 5 6 7 8 9 10 11 12

Typical Holding Tank Compartment

1. Fresh Water Inlet Hook-Up
2. Fresh Water Fill Valve
3. Hose Door for Fresh Water Fill
4. "Gray Water" Knife Valve
5. Drainage Cap
6. Work Light
7. "Black Water" Knife Valve
8. Sewer Hose
9. Low Point Drain
10. Shower Head for Washing Hands
11. Control Valve for Hand Wash
12. Sewer Hose Storage Compartment

Judicious Use of Fresh Water

People who are not accustomed to motor home living are frequently surprised at how much water can be used and wasted. Although your fresh water tank is large, your water supply will not last long unless you alter water consumption habits that are common in conventional houses. For example, shut off the water while you brush your teeth; use only what you need to wash and rinse dishes; and turn off the shower while lathering, then turn it back on briefly for rinsing.

Sanitizing Water Tank

It is suggested that your fresh water tank be renewed periodically using a chlorine solution followed by clear water rinses.

1. Prepare a chlorine solution by adding 1/4 cup of liquid household chlorine-base bleach solution to one gallon of potable drinking quality) water.
2. Add at the rate of one gallon of this solution to the empty supply tank for each 15 gallons of tank capacity.
3. Fill balance of tank with potable water.
4. With pump ON, open each faucet long enough for water to run out, to remove all air from system and lines.
5. Allow the system (now filled with chlorine solution) to stand for at least three hours. Before performing the following step, provisions should be made to allow for drainage of all water from the fresh water tank.
6. Flush the piping by running water through faucets for at least one minute each.
7. Turn pump OFF.
8. Drain tank and pipes by opening tank drain valve. Open each faucet to permit water to drain from each pipe.
9. When the tank is empty and each faucet has been opened, drained and closed, close the drain valve.
10. Fill system with clear fresh water.
11. Repeat steps 6 through 9.
12. Partly fill the system with fresh water and check the tank and system for taste and odor. If a chlorine taste or other traces of impurity remain, accomplish step 13. If the system is clear, go to step 14.
13. Prepare a solution of 1-quart vinegar in five gallons of water and place in tank. Fill the system completely. Agitate this solution by vehicle motion, then repeat steps 4 and 5.
14. Repeat steps 6 through 9 to empty the system.
15. If the system is to be used, fill with fresh water. If not, the system is ready for storage.

Waste Water System

Your motor home has a self-contained "double holding tank" drainage system. Waste water from the toilet flows into the "black water" tank; and waste from the shower, vanity, and sink enters the "gray water" tank. Both tanks are heated and may be used while in transit.

The valves for the holding tanks are accessible in the plumbing compartment. The holding tanks are located on either side of the plumbing compartment.

Empty the tanks only at a proper sanitary disposal station. Drain the tanks when they are nearly full or at the end of your trip. It is not advisable to drain the tanks when they are less than 3/4 full, especially the "black water" tank since a certain amount of liquid is necessary to properly remove solid wastes.

The process of draining the waste water holding tanks is best done while wearing rubber gloves. To drain the holding tanks:

1. Make sure the knife valves on both the "black water" tube and the "gray water" tube are pushed in to their CLOSED position.
2. Remove the plastic sewer hose from the capped storage tube. The hose has been compressed for storage but will extend as needed.
3. Remove the cap from the drain tube and securely attach the sewer hose. Make sure that the clips catch firmly to hold the sewer hose in place.
4. Insert the ground end of the sewer line into a ground sewer or dump station outlet, pressing it firmly far enough into the opening to be secure. In some cases, adapters may be required between the line and the inlet. Arrange sewer line between motor home outlet and dump station so that it is free from dips.
5. Drain the "black water" tank first by opening the knife valve. To open, grasp the handle firmly and pull with a quick steady motion.
6. Allow sufficient time for the tank to be completely drained. Rinse and flush tank if necessary. Then, push knife valve inward to close valve.

Note: Dirty tanks may cause a false reading on the Component Monitoring System.

7. Repeat this process with the "gray water" tank.
Note: By draining the "black water" first, you are using the "gray water" to rinse any solid waste particles that may have been left in the sewer hose.
8. Remove the sewer hose and replace the cap on the waste water line.
9. Use your garden hose to rinse out sewer hose.
10. Remove the sewer hose from the sanitary disposal site.
11. Compress the sewer line back into its storage tube, and replace sewer or dump station cover if applicable.

Please ... use good housekeeping when draining wastes at a campsite or disposal station. Leave the site in good order. Above all, avoid pollution of lakes and streams.

Do's and Don'ts - Waste Tanks

- | | |
|-------|--|
| DO | keep your holding tank clean using any cleaner approved for recreational vehicle sanitation systems. |
| DO | add a special deodorizer or chemical additive approved for recreational vehicle systems to sanitize and improve the tank action. |
| DO | guard against freeze-up. |
| DO | keep your tank knife valve closed, permitting the tank to get as full as convenient before emptying. |
| DO | keep tank knife valve and the drain cap tightly in place when traveling to permit use of the system when on the road. |
| DO | use any soft (single-ply) toilet tissue. |
| DO | open the bath vent to keep bathroom fresh. |
| DON'T | put facial tissues, paper, alcohol type anti-freeze, sanitary napkins, or household toilet cleaners in your holding tank. |
| DON'T | put anything solid in your holding tank which can scratch or damage the plastic. |

Component Monitoring System

Many on-board systems can be monitored from one location. For your convenience, this monitoring system is mounted in the range hood over the kitchen stove.

From this one location, you can check:

- The status of all three holding tanks: "black waste water," "gray waste water," and fresh water
- The level of your LP gas
- The charge in your 12-volt auxiliary batteries

There are also switches to turn on the:

- Water pump
- Water heater
- Generator
- Range hood light
- Exhaust fan

Note: A switch for the water pump is also located in the bathroom, and a switch for the generator is also located on the dash instrument panel.



Component Monitoring Panel

1. Status Lights for amount of water in "Black Water" Tank, "Gray Water" Tank, and Fresh Water Tank; amount of gas in LP Gas Tank; and amount of electrical charge in 12-Volt Auxiliary Batteries
2. Switch that turns on the Status Lights listed in #1; ON/OFF Switches for Water Pump, Water Heater, Generator, Range Hood Light, and Range Hood Fan

Equipment and Furnishings

Pedestal Seats

Pedestal seats have two types of position controls. The seat can be moved forward or back or swivel by using the levers or controls provided. Arm rests can be set in either the up or down position. Be certain that the seat controls are firmly latched and secure prior to driving the vehicle and never adjust the seat position while in motion.

Dinette Bed

A combination dinette and bed may be provided on some models. This dinette combination may be converted into a bed as follows:

1. Fold the table leg by releasing the catch. Relocate the table by lifting the end (to release from the support brackets). Let the table, with the leg folded, drop into down position.
2. Arrange cushions to make a bed.

Storage

Storage facilities on your motor home have been especially designed to remain secure while the vehicle is in motion. Most exterior compartments have key-operated locks. Drawers rest in small notches or detents when closed; to open, lift slightly to clear the detent, then pull open normally. For best results, follow a few simple rules when storing articles in the motor home.

1. Always keep tools and equipment stored in areas where they will not shift while traveling.
2. Wherever possible, place heavy articles in storage compartments which are low and between the axles for better weight distribution.
3. Use a "packing" technique of the articles in a compartment to prevent shifting. If necessary, secure articles with straps to prevent movement.
4. Be sure that containers holding liquids are capped and cannot tip or spill. When glass containers (or dishes) are transported, secure them well to protect against accidental breakage.

WARNING: ON SOME MODELS, STORAGE COMPARTMENTS UNDER THE SOFA BED, UNDER THE MASTER BED, AND IN SOME CLOSETS ALSO CONTAIN FURNACE UNITS. DO NOT STORE ANYTHING IN THE AREA OF THE FURNACE THAT WILL BLOCK OR RESTRICT RETURN AIR FLOW. ALSO, DO NOT STORE ANY COMBUSTIBLES IN THIS AREA.

WARNING: THE STORAGE COMPARTMENT UNDER THE MASTER BED IS EQUIPPED WITH A HEAVY-DUTY SPRING MECHANISM THAT ALLOWS YOU TO EASILY LIFT THE BED BOARD AND MATTRESS. HOWEVER, IF YOU SHOULD EVER REMOVE THE MATTRESS, BE CAREFUL WHEN LIFTING THE BED BOARD. STAND OUT OF THE WAY. WITHOUT THE WEIGHT OF THE MATTRESS, IT WILL COME UP FASTER THAN YOU MIGHT EXPECT.

Care and Maintenance

Interior Cleaning

Wall Paneling

The paneling and the ceiling of your motor home may be any of several finishes and textures. Never use strong detergents or abrasive cleaners on walls or ceilings. Most surfaces will clean with a soft cloth which has been dampened with mild liquid detergent in warm water; avoid the use of large amounts of water. Many panel suppliers suggest that one of the aerosol products designed for cleaning and preserving wood surfaces may be excellent for walls if used in accordance with manufacturer's instructions.

Draperies, Cushions, Bedspreads and Upholstery Fabrics

Due to the various fabric yarns, print inks and dyes, fire resistant finishes where required, and various other treatments applied to the fabrics used to make the above items, we recommend professional dry cleaning only. Professional cleaning will preserve the finishes and appearance of these products.

Vinyl fabrics may be cleaned using a mild detergent and a damp sponge or cloth.

Fixtures

Sinks, baths, showers, or other plastic fixtures should be cleaned only with warm water and mild detergent or special cleaners. The plastics manufacturer recommends Ajax Spray Cleaner with ammonia, Joy dishwashing liquid and water, or a mixture of 25% bleach and 75% water.

Do not use harsh abrasives. They may scratch or discolor the surface, causing it to have to be replaced.

Windows

Moving parts of windows and latches should be kept adjusted and maintained. It is advisable to lubricate the windows with a light oil or powdered graphite at least once a year. The screws holding the windows in place should be checked and tightened periodically and the weather sealant checked for voids. Screens may be cleaned by gently wiping with a damp cloth or soft flat brush designed for the purpose.

Locksets and Latches

Annual lubrication of locksets and latches is recommended to ensure trouble-free operation. If your motor home is located at the beach or is exposed to salt air, more frequent lubrication may be needed. One of the lubricants recommended by many locksmiths is powdered graphite, available in a handy tube at most hardware or supply store.

A record should be kept of the identification number of keys, with the make of lockset in your home. With this information alone it will be possible to obtain duplicates for any key that might be lost.

Carpeting

Use any approved cleaning product or procedure which is recommended for cleaning indoor-type carpets.

Plumbing

The water supply plumbing should require little, if any maintenance. Refer to information provided by the water pump manufacturer for any special maintenance recommendations on the pump mechanism. Refer to the recommendations from the toilet or tank manufacturer relating to maintenance or to chemical additives which may be appropriate for those components. Plumbing system drains and traps should be kept clean.

Chemical products recommended for plastic pipe may be used in the drain lines. Precautions must be taken when using a mechanical device to remove obstructions from a drain line, to avoid damage to fittings and seals. Build-up of waste on level sensors or walls of the holding tanks could result in false readings on the Component Monitoring System. Special cleaning may be required.

Condensation and Ventilation

It is important that moisture-laden air not be allowed to build-up inside your motor home. Moisture build-up is often evident from the forming of a water film on windows and other cooled surfaces. Particular precautions may be appropriate in kitchen or bath areas where normal washing or cooking activities can release water vapor or steam into the air. The following steps are recommended:

1. Keep air circulating by providing ample fresh air through adequate ventilation.
2. When using shower, keep the bath vent open. Keep bathroom door closed for 20 or 30 minutes after use to permit moisture to escape through the vent.
3. Avoid hanging wet clothing to dry inside the motor home. If it cannot be avoided, use the ventilated bath with the door closed.

WARNING: MANY PRODUCTS IN THIS VEHICLE CONTAIN FORMALDEHYDE. IT IS A SUBSTANCE WHICH MAY BE AN IRRITANT TO SOME PEOPLE, UNDER SOME CIRCUMSTANCES. YOU MAY EXPERIENCE A GREATER CONCENTRATION DURING HIGH HUMIDITY AND TEMPERATURES, BUT YOU WILL NOTICE THAT THE FORMALDEHYDE EMISSIONS QUICKLY DECREASE. IF YOU ARE AFFECTED, VENTILATE THE MOTOR HOME AND LEAVE IT UNTIL THE FORMALDEHYDE DISSIPATES. PLEASE CONTACT OUR CUSTOMER SERVICE DEPARTMENT IF YOU DESIRE ASSISTANCE.

Exterior Care

Exterior Glass and Trim

The exterior finish on your motor home is as easy to care for as the finish on your car. To keep it clean, simply hose it down with water, wiping the wet surface with a cloth or sponge if necessary. Do not use harsh abrasives or strong solvents on exterior surfaces.

Accumulated dirt or road film resulting from storage or from heavy travel should loosen easily with warm water and a mild detergent. Rinse with plain water. Application of a good quality automotive wax will protect the finish still more and add luster to the color.

Caution: Be careful when washing your motor home that you do not aim water directly into the furnace vent, water heater vent, or dryer vent. Rusting and improper operation could occur if water is forced past the protective rain baffles.

Care and Cleaning of Fiberglass Components

The front and rear caps (if equipped) of your Georgie Boy motor home are constructed of fiberglass for its light weight, design flexibility, corrosion resistance, and strength.

To retain the new appearance requires basically the same procedures used in caring for automotive finishes.

1. Wash frequently to remove road soil.
2. Avoid waxing of painted areas for 30 days after initial purchase.
3. Avoid use of abrasive cleaners; the use of liquid soaps (Top Job, Liquid Lysol) are recommended.
4. Stubborn spots may be removed with a good automotive rubbing compound (Dupont #606)
5. Wax periodically with automotive wax or auto glaze and the original luster will be retained for years.

Roof

The adhesives and sealants used to construct your roof have been chosen especially to remain waterproof under the sustained effects of weather and vibration. Wash dirt and grime from the roof when washing the motor home to help minimize deterioration of the roof materials.

Periodically, inspect the roof with careful attention to possible scrapes or cuts caused by overhanging obstructions. Repair any damaged spots with appropriate repair materials from your dealer. Do not use trailer roof coatings.

The rubber roof can become dirty with everyday exposure to the elements. However, it can be kept clean with periodic cleanings.

The roof can be cleaned with a good household detergent, i.e., Spic-n-Span, Ajax. Follow the instructions on the box and be sure to rinse thoroughly from the roof and from the sides of the motor home. After the roof dries, it is a good idea to apply a protectant to the roof, i.e., Armoral, STP's Son of a Gun.

Should the roof become stained, then we recommend the use of Formula 409 or a similar cleaner. Again, just follow the instructions on the container. For mildew stains, Tilex does an excellent job of breaking it down and getting rid of the mildew.

For more stubborn stains, mineral spirits, paint thinner, or white gas can be used. Please remember that when using these types of products, never pour them directly on the roof. Pour them onto a rag and then wipe off the stain. Also, never leave a solvent soaked rag on the roof. Please exercise caution when working with these solvents, as excessive solvent contact with the rubber can cause a temporary swelling of the rubber.

Sealant Check of all Seams and Moldings

Checking of all seams and moldings for deterioration, shrinkage, and cracking of the protective sealers should be performed at least once every six months. Resealing should be done as soon as any of these conditions are noticed to prevent damage from water leakage. When resealing, use only quality sealers such as silicone or silaprene. Make sure all surfaces to be resealed are clean and all old sealant has been removed.

Repairs

Your dealer should be able to perform most repairs of service required for your motor home. Repair or service for warranted appliances in your motor home will normally be handled through the appliance manufacturer in accordance with warranty instructions provided in the owner's kit. Your dealer will be glad to assist if you have difficulty obtaining service through your appliance service representative.

Refer to your Chassis Operator's Manual and to other information provided by the chassis manufacturer for chassis service instructions.

Repair of glass, fiberglass, aluminum, or some plastic components can often be accomplished by camper/trailer service firms or by automobile body shops. Check with your dealer or look in the classified section of your telephone directory or newspaper.

It is recommended that all chassis body bolts be checked once a year for tightness to prevent rattles due to vibration.

Extended Storage

If your motor home will not be used for a period of several weeks, you should perform certain procedures to maintain its performance capability over that period of time.

Water System

Refer to the water blow-out procedure.

Kitchen Appliances

Refer to the manuals provided by the manufacturers of these appliances.

Furnace Fan and Thermostat


Make sure that the switches for both the furnace fan and thermostat are in the OFF position.

Electric Step

Shut off the switch by the passenger entrance door.

Plumbing Compartment Light

Turn off the light in the plumbing compartment.

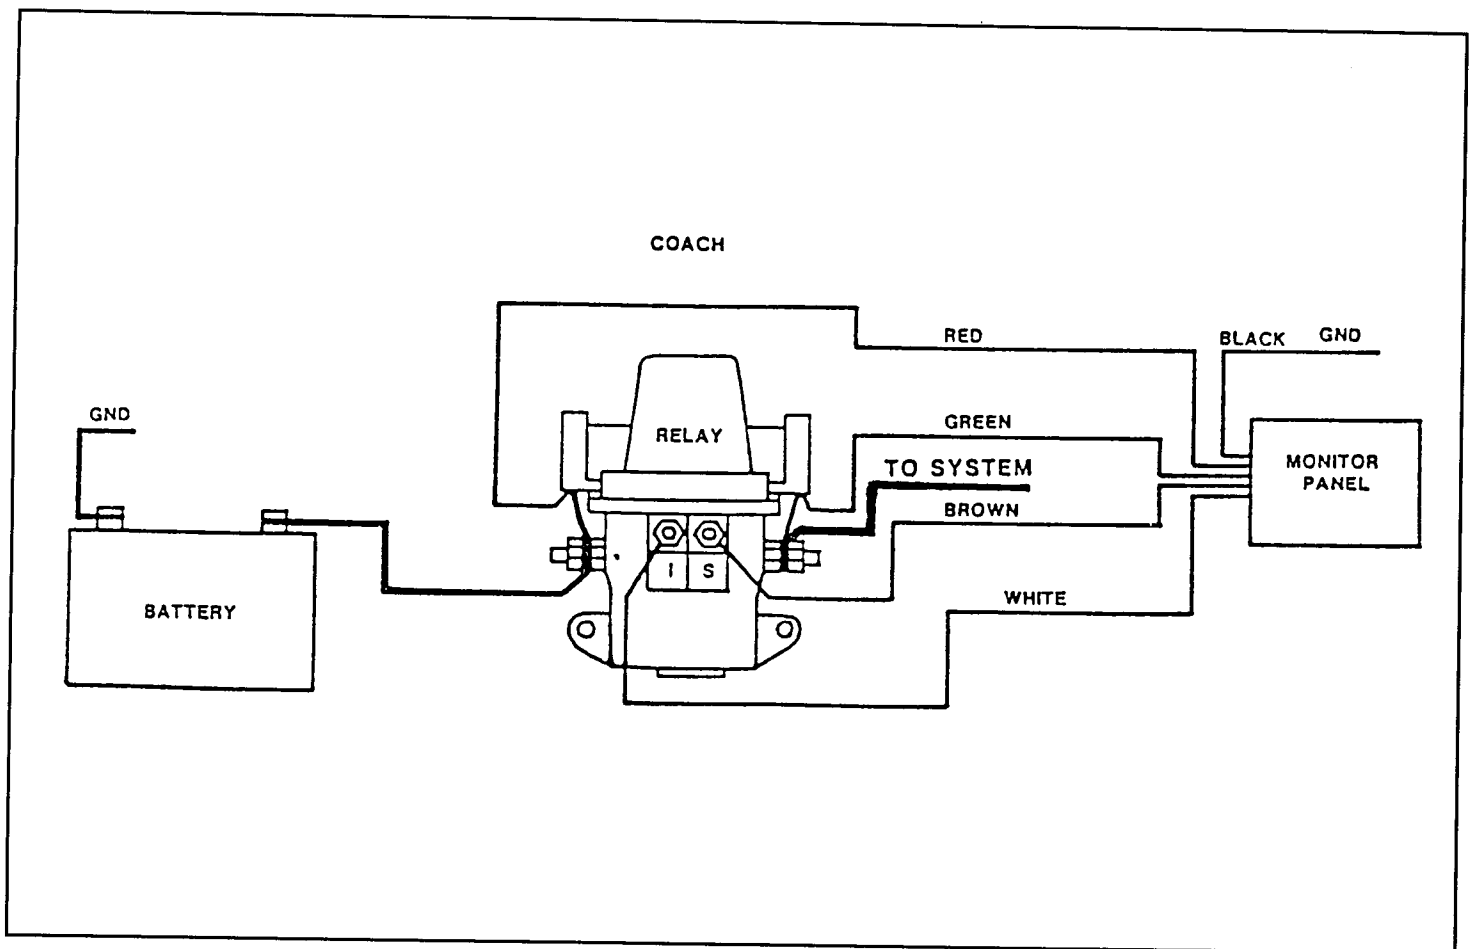

Auxiliary Battery Disconnect Circuit on Impulse and Encounter

Auxiliary Battery Disconnect Panel

In the Impulse and Encounter, an auxiliary battery disconnect panel is an optional feature. It is located either on the dash or in the stepwell near the passenger entrance door.

By pressing the switch on this panel, you are able to disconnect the auxiliary batteries from the 12-volt electrical circuits. This operates in the same manner as if you physically disconnected the cables from the batteries, but it is much more convenient.

If you disconnect the electrical circuits with the battery disconnect panel, it is not necessary to shut off individual electrical components.

Note: This battery disconnect feature is intended to be used only when the motor home is to be stored for an extended period of time.

Battery Buddy ®

The Cruise Air is equipped with a Battery Buddy®. It is installed behind the front hood door and is attached

to the side of one of the auxiliary batteries. Its purpose is to monitor the amount of voltage in the auxiliary batteries. If the voltage drops to a certain level, the Battery Buddy disconnects the electrical system from the batteries, thus you can confidently use vehicle accessories without worrying about too much drain on the batteries. The cut-off point should be high enough that sufficient voltage remains in the batteries to start the engine using the emergency start system. If the Battery Buddy does switch off the electricity, push the restart button on the Battery Buddy and start your motor home.

Emergencies


Smoke Detector

Your motor home has a smoke detector mounted on the ceiling near the kitchen. Test it at least once a year, or before beginning each trip. To test the smoke detector, press the button in the middle of detector. It should emit a loud piercing sound ... the same sound you will hear in case of emergency. If it does not make that sound, replace the batteries.

Every passenger location in a motor home can be evacuated through at least two emergency exits. In case one route is blocked, you have an alternative route.

On the Encounter, the emergency exits are the driver's entrance door, the passenger entrance door, and a window in the bedroom. On the Cruise Air and Impulse, the emergency exits are a window directly behind the driver's seat, the passenger entrance door, and a window in the bedroom.

Note: Locate the emergency exit windows in your motor home.

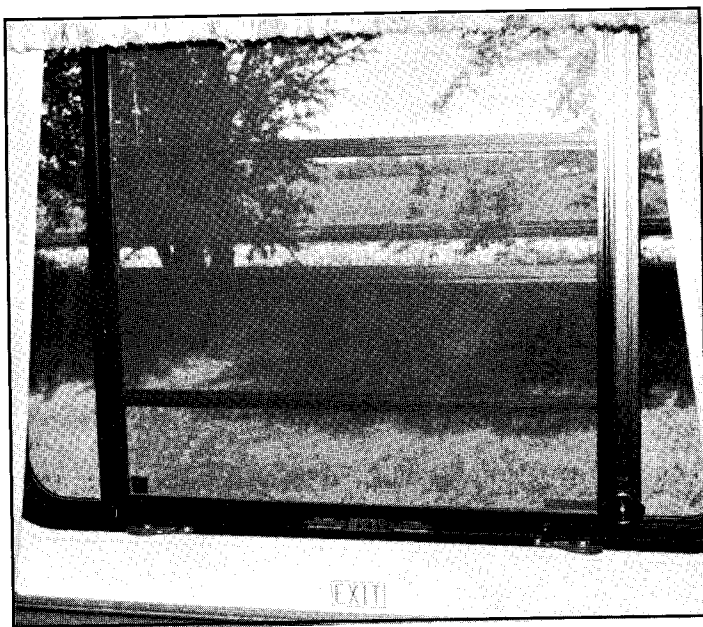

The emergency window(s) are marked with an EXIT sticker and bright red latches. To use this escape exit:

1. Unlock the latches.
2. Open the window.
3. Crawl through the window.
4. Call for help.

Note: Some windows slide and others push out at the bottom. Know how your windows open.

The Fire Extinguisher
The fire extinguisher is mounted in a bracket just inside the passenger entrance door. This is a convenient location for use both inside and outside the motor home. Before using your motor home, familiarize yourself with the proper operation of the fire extinguisher. Basic instructions are found on the fire ex-


tinguisher label. More detailed information is in a booklet as part of your Owner's Information Packet.


Note: Read this information and learn how to operate the fire extinguisher now. In an emergency, it is too late to read the instructions.

Certain 115-volt circuits are wired with ground fault interrupters (GFI) to prevent electrical shock. The receptacles protected by a GFI are the outdoor patio receptacle, all receptacles in the bathroom and the kitchen area, and some receptacles on the passenger side of the motor home. If you should experience an interruption of electrical power in any of these receptacles, push the reset button on the receptacle in the bathroom. If the interruption in power occurs again immediately, there is a short somewhere in the circuit, and you will need to find it and fix it before using the circuit again.

Maintenance and Storage Notes

[illegible]





Index

Air Conditioners - Roof	18	Generator Power Plant System Service	16
Batteries - 12-Volt	18	Generator Receptacle	17
Battery Disconnect Panel	33	Generator Starting	17
Battery Buddy	33	Ground Fault Interrupters	34
Battery Service	14	ICC Flasher	13
Changing a Tire	13	Interior Cleaning	30
Chassis Operator's Manual	14	Leveling	14
Component Monitoring System	29	Load Capacity	7
Condensation and Ventilation	31	LP Gas	21
Construction Standards	2	LP Gas Appliances	23
Dinette Bed	29	LP Gas Tank - Filling	22
Dinette Table, Pedestal	29	LP Gas System Leak Checks	22
Driver's Compartment	10	LP Gas System - Low Temperatures	22
Driving and Parking	12	Maintenance and Storage Notes	34
Electrical	9	Manometer Gauge	23
Electrical Power Supply Cord - 115-Volt	17	Oven	24
Electronic High Temperature Alarm	13	Plumbing	30
Emergency Starting	13	Radiator Service	14
Engine Cooling System	12	Range Top	24
Engine Removal	14	Reference Material	1
Engine Service	14	Refrigerator/Freezer	18, 24
Escape Routes	34	Reporting Safety Defects	3
Extended Storage - Electric Step	32	Starting and Warm-Up	8
Extended Storage - Furnace	32	Safety Belts	9
Extended Storage - Kitchen Appliances	32	Smoke Detector	31
Extended Storage - Lights	32	Storage	29
Extended Storage - Water System	32	Tag Axle	14
Exterior Care	31	Tire Chains	13
External Features - Cruise Air	4	Towing	16
External Features - Impulse	5	Vehicle Identification Number	1
External Features - Encounter	6	Waste Tank - Do's and Don'ts	28
Fire Extinguisher	34	Waste Water System	28
Fresh Water	25	Water Heater	24
Fresh Water Supply - Filling	26	Water Supply - External	25
Fresh Water Use	27	Water System - Troubleshooting	26
Fuel (LP, Gasoline, Diesel)	9	Water System - Winterizing	26
Furnace	24	Water Tank - Sanitizing	27
Fuse Replacement	13	Weighing	7
Fuses - 12-Volt	19	Windshield Defrost - Comfort Control	13
Generator	17		
Generator Fuel	18		

