


1993 - 1994

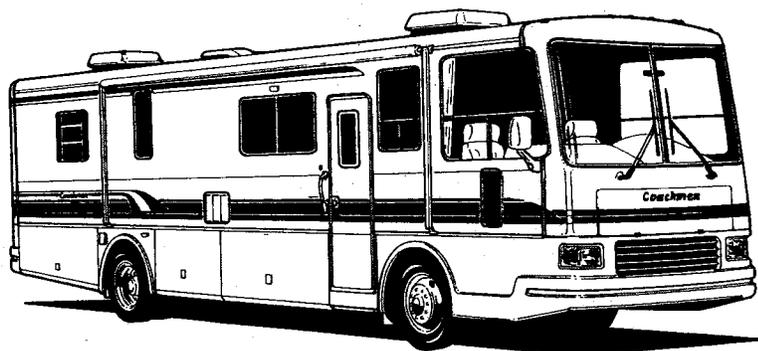

OWNER'S
REAR DIESEL
MANUAL

Welcome to Coachmen's growing family of happy RV owners. Hours of relaxation, adventure and enjoyment await you in your new Coachmen unit. Thousands of Coachmen RV owners have been enjoying their units for many years.

This Owner's Manual has been prepared to help you and your family enjoy your new Coachmen RV to its fullest by providing basic instructions for the operation and maintenance of its appliances, accessories and RV systems. Please read it carefully and follow the instructions. Also read and follow the instructions contained in the chassis, appliance and accessory manufacturers' instruction booklets provided as part of the "Coachmen Information Packet."

If you have any questions regarding operation, maintenance or service, please contact your Coachmen dealer so he can assist you. Your satisfaction is of the utmost importance to your dealer and to Coachmen.

Operation and maintenance instructions regarding appliances in this manual were obtained from the manufacturer's booklets and are used with the permission of those various manufacturers. Coachmen Industries reserves the right to present edited portions of these materials.

Coachmen Industries, Inc. works year round to improve its product. As a result, all specifications, equipment and prices quoted are subject to change without notice or obligation to the consumer.

Coachmen offers a wide variety of recreational vehicle models and choices of standard and optional equipment; therefore, certain descriptions in this manual may not apply to your unit. Ask your authorized dealer, or see the current brochure for information on the availability of standard or optional equipment.

Thank you for selecting our product. The entire Coachmen Industries family strives to merit your confidence.

JOIN THE INTERNATIONAL COACHMEN CARAVAN

The International Coachmen Caravan is your owners' club. It is designed to help you get the most pleasure from owning a Coachmen recreational vehicle. With your membership you'll receive:

MEMBERSHIP PACKAGE: The first benefit a member receives is a complete Caravan Identification Package. It includes a membership card, Coachmen Caravan decals and unit numbers. These are all-important to identify you as a full-fledged Caravanner eligible for all other Caravan benefits.

PERSONALIZED TRIP ROUTING SERVICE: We'll tell you the best way to go. Let us plan the itinerary that leads to your fun and traveling pleasure.

MAGAZINE DISCOUNTS: Save on a variety of America's popular subscriptions. The magazines about camping, traveling and the great outdoor world are especially right for you and your lifestyle - and so are the savings!

CARAVAN TRIPS: Hit the Caravan trail. It's the high road to adventure all year long. Interesting places and events are a big benefit of Caravan membership. There's so much to see and do when you're a member of the Caravan. The professional Caravan staff is constantly striving to develop outstanding tours and events. Traveling to special places with a Caravan of friends is a memorable experience that families can enjoy together.

CARAVAN CAPERS: Catch the news that features you. Capers is the quarterly magazine that brings you news about Caravan members and chapters across the continent, information about forthcoming trips and

rallies, and a variety of timely articles about the wonderful world of Coachmen Caravan. Capers is the special edition that's right for you.

PETE'S MARKET: Pete's Market is the Caravanner's mail-order store. And it's stocked with a vast array of distinctive items to make your RV adventures more fun. Special decals, patches, clothing, accessories, jewelry and some featuring Pete, the Dalmatian, our symbol - all reasonably priced with discounts for Caravan members.

DISCOUNT FILM PROCESSING: Capture those beautiful memories on film. And see the sights again when you take lots of pictures of your Caravan trips and other RV travels. Mail in your film to Caravan's special discount film processing center.

CAMPGROUND DISCOUNT PROGRAM: We have Campgrounds all over the U.S. and Canada that will give active Caravan members a camping discount. All you need to do is present your Caravan Membership Card at the check-in counter of those Campgrounds listed in the Campground Directory. Staying at about 10 campgrounds listed will make up for the cost of your yearly dues.

continued on back

SUBSEQUENT OWNER INFORMATION

If you are the second or subsequent owner of this recreational vehicle, it is important that you notify Coachmen RV of your name, address, date of purchase and the Serial Number of your RV. This information is vital for Coachmen RV to maintain up-to-date records of current ownership. You also may be entitled to the remainder, if any, of the warranty coverage. See the warranty explanation in the WARRANTY section of this manual. Complete the form below, clip it, and mail it to Coachmen RV Company.

Date of Purchase _____ RV Serial No. _____

Name of Former Owner _____

Your Name _____

Address _____

City _____ State _____ Zip _____ Phone No. _____ / _____

INTERNATIONAL COACHMEN CARAVAN MEMBERSHIP APPLICATION

Name _____ Spouse's Name _____

Occupation _____ Address _____

City _____ State _____ Zip _____

Phone (_____) _____ Ham Call Letters _____

Previous Caravan Member? Yes No

International No. _____ Expires _____

Type of Unit _____ Length of Unit _____

Children's Name and Date of Birth 1. _____

2. _____ 3. _____

4. _____ 5. _____

Referred by _____

1 Year \$18.00

2 Years \$30.00

3 Years \$43.00

Bill Me

CAMPGROUND MANUAL DISCOUNTS: Take the scenic route! It's fun and it's easy when you have your guidebook, available at a special price, for RV campgrounds.

LOCAL, STATE AND DISTRICT ACTIVITIES: Enjoy get-togethers and outings with other Caravanners throughout the year. In addition to International Caravan trips and rallies, you can enjoy your local, state and district Caravan Chapter activities too! There's always something exciting to plan and attend.

ANNUAL INTERNATIONAL CARAVAN RALLY: Come and share your good times with fellow Coachmen travelers.

KEY RETURN: If you lose your key ring identified with a special key tag number and the keys are found and dropped in a mail box, they will be returned to you through your Caravan office.

MEMBERSHIP DRIVE AWARDS: There is an excellent awards program with many awards available for bringing your friends into the International Coachmen Caravan as members. You can receive a lifetime membership, rally and trip discounts. Details and awards break down will be in your membership packet.

ICC MASTER CARD: As you support the Caravan, you help yourself. Caravan MasterCard special benefits include; No annual fee, Low 16% A.P.R., 25-day grace period on purchases, Automatic common-carrier

travel insurance of \$100,000 at no additional cost, Access to more than 23,000 CIRRUS network automated teller machines in more than 3,000 cities across the U.S. and Canada - fast cash - 24 hours a day - every day - added recognition for the Caravan whenever your card is used.

VISA OR MASTER CARD ACCEPTED: Membership Fees, Pete's Market, International Rally Fees, Coachmen Caravan Trip Fees.

EMERGENCY ROAD TOW SERVICE: You have available at a very low price an emergency Road program that covers not only your RV, but your tow vehicle or vehicle being towed.



To join the Caravan, complete, clip and mail the Membership Application, to the International Coachmen Caravan, P.O. Box 30, Middlebury, IN. 46540.

PLACE
STAMP
HERE



***SUBSEQUENT OWNER**




PLACE
STAMP
HERE

INTERNATIONAL COACHMEN CARAVAN
P. O. BOX 30
MIDDLEBURY, INDIANA 46540

***NEW MEMBERSHIP**

Table of Contents

INTRODUCTION	9	Ground Fault Interrupter	21
Warranty	6	Shoreline Connection	21
Safety Regulations	8	12 Volt System	21
Taking Delivery	9	Power Converter	22
Obtaining Service	9	In-Line Fuses	22
Travel Preparations	10	Auxiliary Generator	22
Important Documents	10	FRESH WATER SYSTEM	23
Tourist Information	10	Sanitizing the Water Tank	24
Visiting Canada or Mexico	10	Water Pump	24
LOADING/WEIGHING	13	DRAINAGE/SEWER SYSTEM	24
Weight Determinations	13	Emptying the Holding Tanks	25
Definitions	13	LP GAS SYSTEM	25
Vehicle Weighing	13	Climate Differences	26
DRIVING YOUR MOTORHOME	14	Regulator Pressure	26
General Driving Checks	14	LP Leak Detector	26
Clearance	15	LP Gas Regulator Freeze-Ups	26
Pulling into Traffic	15	Filling LP Gas Tanks	27
Passing	15	LP Gas Line Check	27
Braking	15	APPLIANCES/ACCESSORIES	27
Stopping Distance	15	Vehicle Security System	27
Emergency Stopping	15	Heated/Remote Mirror	27
Parking on a Grade	15	Rear Vision Camera	27
Downgrades	15	Electric Step	28
Upgrades	15	TV Antenna/Cable System	28
Overheating	15	Television	28
Swaying or Fishtailing	16	Video Cassette Recorder	28
Turning Corners	16	Central Vacuum System	28
Backing	16	AM/FM Stereo Cassette Player	29
Freeing a Stuck Vehicle	17	Food Center	29
Tire Change	17	Coffeemaker	29
Towing	17	Furnace	29
Instrument Panel	16, 17	Rear Auxiliary Heater	29
AIR CYINDER SUSPENSION	17	Refrigerator	30
AIR BRAKE SYSTEM	18	Spotlight	30
Air Tank Drains	18	Battery Disconnect	30
CAMPING/LIVING AREA	18	Roof Air Conditioning	31
Campsite Selection	18	A/C Selector Switch	31
Set-Up	18	Gas Water Heater	31
Leveling	18	Range, Range Hood, Oven	32
Air Quality	19	Microwave Oven	33
Condensation	19	Monitor Panel	33
Sofa Bed	20	VEHICLE MAINTENANCE	33
Driver and Passenger Chairs	20	Storage	33
Windshield Drapes	20	Winterization	34
Emergency Exit Window	20	Interior/Exterior Care	34
Smoke Detector	20	Coach/Chassis Specifications/Information	37
Fire Extinguisher	20	Appliance ID Form	38
Carbon Monoxide Detector	20	Travel Record	39
Safety Seat Belts	20	Maintenance Record	40
Infant and Child Restraints	21	Maintenance Schedule	41
ELECTRICAL SYSTEM	21	Troubleshooting	42
120 Volt System	21	Reporting Safety Defects	45

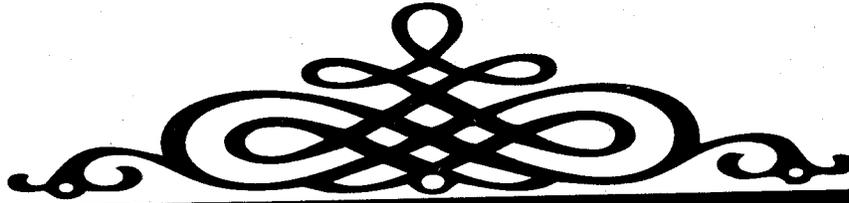

NEW RECREATIONAL VEHICLE LIMITED WARRANTY

COVERAGE PROVIDED

Coachmen Recreational Vehicle Company will, for one year from the initial retail purchase date, or for one year from the date the unit was first put into use, or for the first 15,000 miles of total use, whichever comes first, make repairs which are necessary because of defects in material or workmanship. We will repair or replace any defective part at no cost to you. Because of design changes and improvements, we may substitute parts or components of substantially equal quality.

TO OBTAIN SERVICE

For warranty service, take the product, at your expense, to an authorized Coachmen dealer or service center.

WHAT IS NOT COVERED

Automotive chassis, tires, batteries, and optional television sets or generators which are warranted separately by their manufacturers.

Damage such as that caused by misuse, abuse, collision, alterations, lack of proper maintenance, improper repairs.

Normal deterioration or wear of fabrics and carpeting.

Any product which is not used for its customary purpose.

Normal maintenance—it is the owner's responsibility to maintain the product in accordance with the instructions provided in the owner's manuals.

Any product which is not registered and normally used in the United States or Canada.

Any promises made by any person beyond those stated in this warranty.

WE SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, such as expenses for transportation, lodging, loss or damage to personal property, loss of use of your product, inconvenience, or loss of income. Some states do not allow exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you.

* * * * *

IMPLIED WARRANTIES, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE TERM OF THIS WRITTEN WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

We want you to be satisfied with your new product. For further help or information, contact: **COACHMEN RECREATIONAL VEHICLE COMPANY, SERVICE DEPARTMENT, P.O. BOX 1000, MIDDLEBURY, INDIANA 46540.**



OUR WARRANTY

GENERAL—Your new Coachmen is backed by our position as an industry leader, achieved through decades of experience in producing RV's noted for their quality and dependability. Our warranty demonstrates our confidence in our products and is a commitment to customers' continued satisfaction.

Every effort has been made to provide you with a safe, dependable recreational vehicle. Your Coachmen complies with applicable federal and state regulations and the requirements of ANSI A119.2, the nationally recognized "Standard for Recreational Vehicles—Installation of Plumbing, Heating and Electrical Systems." The Recreation Vehicle Industry Association (RVIA) periodically inspects our production and assist in maintaining strict compliance with installation and safety standards for those systems. Similar periodic inspections of the systems are made by representatives of various states. You, the owner, must also perform periodic inspections of the systems and provide a program of preventive maintenance as described in the Owner's Manual and instruction booklets.

WARRANTY SERVICE—We recommend that warranty service be performed by the authorized dealer from whom you purchased your Coachmen because of the dealer's continued and personal interest in your satisfaction. But if you are traveling or in the event that you move, service under the warranty will be performed by any authorized Coachmen dealer. Whenever possible, make an appointment to avoid unnecessary delays. Non-emergency repairs can be done at a later date.

Always Carry Your Owner Registration Card, which must be presented to obtain warranty service. The card is proof of purchase and provides the date of retail sale, which are necessary to determine warrantability. If you cannot locate an authorized Coachmen dealer, contact Coachmen Customer Service, (219) 825-7000.

WARRANTY PERIOD—The warranty period is for 12 months or the first 15,000 miles of total use, whichever comes first. It begins on the date your new recreational vehicle is purchased or the first inservice date, whichever is first.

WHAT IS COVERED—The Manufacturer warrants to owners that an authorized Coachmen dealer will make repairs made necessary by defects in material or workmanship during the warranty period. Such repairs will be made without charge for parts and labor to the owner.

WHAT IS NOT COVERED—Our warranty does not cover the motor home chassis, tires, batteries or optional TVs and generators, repairs or adjustments required because of neglect, accident, misuse, failure to follow service and use instructions, normal wear and/or exposure, unauthorized repairs or unauthorized modifications to any part of the systems or body that might cause defective performance or dealer installed options.

Your new Coachmen is designed as a temporary living quarters for recreational camping, travel or seasonal use and not as a permanent dwelling place. Usage as a permanent accommodation is a breach of warranty and we are not liable for any damage that results because of such misuse.

Coachmen does not assume responsibility for loss of use of the recreational vehicle, loss of time, inconvenience or expenses due to equipment failures (refer to the warranty statement for other exclusions and limitations).

OTHER WARRANTIES—Be certain to complete and submit to the appropriate manufacturers the warranty forms for tires, batteries, chassis and optional TVs and generators, which are not covered by our warranty. If service or parts are required for these products, please refer to the furnished list of factory-authorized service centers. If the list is not available, write or call the manufacturer concerned to obtain the location of the nearest authorized service center.

CUSTOMER SERVICE—Owner satisfaction and goodwill are of primary concern to Coachmen. We recognize that our continued success as a leading manufacturer of recreational vehicles depends upon your complete confidence in our products and service. A pleasant and effective relationship through our dealers is as important as maintaining the technical excellence of our product. Your authorized dealer will assist you in providing service, maintenance, selection of options and instructions concerning the operation of your recreational vehicle.

Occasionally, a warranty or service matter may not be handled to your satisfaction. Often it is the result of a misunderstanding and can be resolved at the dealer level. Discuss the situation with the dealership management. If you cannot find satisfaction at the dealer level, we invite you to contact Customer Service Department, where we will make every effort possible to find an agreeable solution. In most instances, we will eventually refer you back to the local dealer with our recommendations.

Write or telephone Customer Service Department, P.O. Box 1000, Middlebury, IN 46540, (219) 825-7000.

IMPORTANT SAFETY REGULATIONS

... please read carefully.

LP GAS SYSTEMS AND APPLIANCES

Coachmen Industries is required to furnish the following consumer information as provided by the National Fire Prevention Association and the American National Standards Institute. The information and warnings found here may also be found in other sections of this Owner's Manual. Please see sections titled "Liquid Petroleum Gas System" and "Appliances" for other safety and operating information.

WARNING!

LP gas containers shall not be placed or stored inside the vehicle. LP gas containers are equipped with safety devices which relieve excessive pressure by discharging gas to the atmosphere.

WARNING!

It is not safe to use cooking appliances for comfort heating. Cooking appliances need fresh air for safe operation. Before Operation:

1. Open overhead vent or turn on exhaust fan, and,
2. Open window.

This Warning label has been located in the cooking area to remind you to provide an adequate supply of fresh air for combustion. Unlike homes, the amount of oxygen supply is limited due to the size of the recreational vehicle, and proper ventilation when using the cooking appliance(s) will avoid dangers of asphyxiation. It is especially important that cooking appliances not be used for comfort heating as the danger of asphyxiation is greater when the appliance is used for long periods of time.

WARNING!

Portable fuel-burning equipment, including wood and charcoal grills and stoves, shall not be used

inside this recreational vehicle. The use of this equipment inside the recreational vehicle may cause fires or asphyxiation.

WARNING!

Do not bring or store LP gas containers, gasoline, or other flammable liquids inside the vehicle because a fire or explosion may result.

A warning label has been located near the LP gas container. This label reads: DO NOT FILL CONTAINER(S) TO MORE THAN 80 PERCENT OF CAPACITY.

Overfilling the LP gas container can result in uncontrolled gas flow which can cause fire or explosion. A properly filled container will contain approximately 80 percent of its volume as liquid LP gas.

The following label has been placed in the vehicle near the range area:

IF YOU SMELL GAS:

1. Extinguish any open flames, pilot lights and all smoking materials.
2. Do not touch electrical switches.
3. Shut off the gas supply at the tank valve(s) or gas supply connection.
4. Open doors and other ventilating openings.
5. Leave the area until odor clears.
6. Have the gas system checked and leakage source corrected before using again.

LP gas regulators must always be installed with the diaphragm vent facing downward. Regulators that are not in compartments have been equipped with a protective cover. Make sure that regulator vent faces downward and the cover is kept in place to minimize vent blockage which could result in excessive gas pressure causing fire or explosion.

INTRODUCTION

Congratulations on the purchase of your new Coachmen recreational vehicle. We sincerely thank you for choosing our product. To help you enjoy it, you'll find in this owner's manual many useful tips for camping trips as well as basic operation and maintenance information for your Coachmen unit's systems and appliances.

TRY A SHORT TRIP FIRST. the experience you will gain from this will help make your future RVing more enjoyable.

To complement the standard and optional equipment you've chosen for your unit, there are many other accessories available. You may wish to use your unit several times before you invest in these accessories. What may be a necessity for one RVer could prove to be of no value to you. Remember, your dealer is always ready to help and advise you.

We go into great detail in this manual and for good reason. If you are a first-timer, we want you to learn to operate your recreational vehicle correctly, to be able to use its components, appliances and any optional equipment in the most efficient manner.

At first glance, you may be overwhelmed by all the detail. But after you've used your new recreational vehicle a couple of times, you'll be able to perform all the checks, start-ups and systems in much less time than it takes to read our instructions.

If you're a veteran RVer, you know that things change and a quick review of this manual will bring you up to date on what's new.

So read on. Happy camping!

Note: *Because of individual tastes and the different floorplans offered, your recreational vehicle may not have all of the components illustrated or described in this manual. Ask your dealer for details concerning the specifics of your unit.*

TAKING DELIVERY

Your recreational vehicle has been inspected by factory personnel throughout the manufacturing process. Our final factory check by quality control inspectors is not the last one. Your dealer performs additional pre-delivery inspections and systems checks, and helps you understand the Warranty and complete any necessary forms.

Dealer Responsibilities Include:

1. Orienting the customer to the recreational vehicle, its systems and components, and their operation.
2. Insuring the customer receives a complete Owner's Packet with warranty cards and registrations for the recreational vehicle and for separately warranted products, including operating and maintenance instructions.

3. Reviewing Limited Warranty provisions with the customer, stressing the importance of mailing warranty cards and registrations to the manufacturers within the prescribed time limits to avoid loss of Warranty coverage. Assisting the customer in completing these forms if he wishes, requesting that the customer read all warranty information as soon as possible explaining any provisions not clearly understood.
4. Instructing the customer how to get local service and out-of-town service on the recreational vehicle and its separately warranted components, either in or out of warranty.

Customer Responsibilities

As a new recreational vehicle owner, you have the responsibility for regular and proper maintenance. This will help you avoid conditions arising from neglect that are not covered by your Coachmen Recreational Vehicle Limited Warranty. Maintenance services should be performed in accordance with this Owner's Manual, the chassis Owner's Manual, and any other applicable manuals.

As the owner, it is your responsibility and obligation to return the recreational vehicle to an authorized dealer for repairs and service (SEE LIMITED WARRANTY).

Since the Authorized Dealer from whom you purchased your new recreational vehicle is responsible for its proper servicing before delivery, and has an interest in your continued satisfaction, we recommend that INSPECTION, WARRANTY AND MAINTENANCE SERVICES be performed by him.

SUGGESTIONS FOR OBTAINING SERVICE FOR YOUR RV

Give Thought to the Appointment Time . . .

Know when to take your RV in for service. Monday and Friday are busy days at most dealers. Therefore, it makes sense to make a mid-week appointment whenever possible.

Prepare for the Appointment . . .

If you're having warranty work done, be sure to have your warranty card with you. All work to be performed may not be covered by the warranty; discuss additional charges with the service manager. Keep a maintenance log of your vehicle's service history. This can often provide a clue to the current problem.

Prepare a List . . .

Make a written list of your RV's problems or the specific work you want done. If you've had an accident or work done that is not on your maintenance log, let the service manager know. Don't keep secrets.

Be Reasonable with Your Requests . . .

Don't leave a list of twenty items to be serviced and expect to have your RV back by five o'clock. If you list a number of items and you must have your Rv by the end of the day, discuss the situation with the service manager and list your items in order of priority. Expect to make a second appointment for work not completed or for parts that may need to be ordered.

You Can't Look Over the Technician's Shoulder . . .

Don't be offended when you are told you can't watch the work being done. Insurance requirements forbid the admission of customers to a service repair area.

Inspect the Work Properly . . .

Check out the service or repair job when you pick up your RV and notify the Service Manager of any dissatisfaction. If circumstances prevent returning for immediate corrective work, make an appointment for as early a date as possible or practical.

TRAVEL PREPARATIONS

It's always a good idea to plan your trips. Make arrangements for someone to check your house periodically while you're on your trip. Stop mail and newspaper delivery. If you intend to be away for more than two weeks, request police surveillance for your house. Carry an extra set of vehicle and house keys with you on a separate key ring.

Fill your fresh-water tank before leaving. When traveling in winter, however, don't fill the water tank until the interior of your unit is thoroughly warmed or until you reach your destination.

Decide on the various items of equipment, clothing, food and other supplies you'll need for the length and destination of your trip.

Each moment you spend loading your RV is time you lose from the length of your stay. To reduce loading time, stock your RV with a supply of plastic or paper dinnerware, stainless steel or plastic flatware, pots, pans, towels and bedding. Try to use paper, plastic and aluminum whenever possible. They are lighter and less likely to break when the vehicle is moving. If you are planning an extended trip, pack only enough food for two or three days; you can replenish your supply along the way. Plan meals so that fresh or refrigerated items are used before they spoil. Keep a basic supply of seasonings (sugar, salt, pepper, spices) in your RV. See the TRAVEL PREPARATION CHECKLIST at the back of this section for more tips on what to pack for your trip.

IMPORTANT DOCUMENTS

Always carry your vehicle registration, insurance policy card(s) and owner warranty registration. If you lend your RV, it is best to give the borrower a notarized letter of approval authorizing him to be in possession of the vehicle.

Licenses

Vehicle licensing laws vary from state-to-state. Check with your state license bureau or the nearest licensing branch office for the requirements of your state. Be sure to renew your driver's license if it has expired or will expire during your trip.

Insurance

Talk to your insurance agent about personal liability, property damage, collision and theft of contents insurance for your new RV. Always carry your insurance policy and/or card with you when you travel.

TOURIST INFORMATION

Obtain current road maps and tourist information for each state you'll visit or drive through. You also may want to purchase a tourist guide book.

If you will be visiting federally-operated national parks, monuments and recreation facilities, you might find the Golden Age Passport and/or the Golden Eagle Passport useful. These passports can help families cut expenses at areas where fees are involved.

GOLDEN AGE PASSPORT is a free lifetime pass for persons age 62 and over. It covers all admission fees and includes a 50 percent discount on usage fees (except fees charged by privately operated concessions). This passport is available only at park service offices and at parks where entrance fees are charged. It cannot be obtained through the mail or at post offices. To obtain the Golden Age Passport, you will need proof of age, such as a driver's license. (Medicare cards are not accepted as proof of age.) If you do not have adequate proof of your age, be prepared to sign an affidavit swearing that you are at least 62 years of age.

GOLDEN EAGLE PASSPORT is designed for persons who plan to visit in a single year several parks or federally-operated facilities. It covers all admission charges, but does not cover usage fees. It is good only during the calendar year in which it is issued. It may be purchased in person or through the mail from the National Park Service Headquarters, department of the Interior, Washington, D.C. 20240; at regional National Park Service offices, or at similar facilities where entrance fees are charged.

Both Golden Age and Golden Eagle Passports cover admission fees for passengers accompanying the permit holder. Where entry to the recreation facility is not by private vehicle, such passport covers only the permit holder and the permit holder's immediate family.

VISITING CANADA OR MEXICO

The information in this section is general and is subject to change by the Canadian or Mexican government. For specific information, including rules for re-entering the U.S., as well as points of interest and campsites, contact the consulate nearest the point at which you plan to enter the country.

Passports or visas are not required for entry into

CANADA or MEXICO. You must, however, carry your birth certificate, voter registration card, baptismal certificate or similar proof of identity when entering one of these countries. Naturalized U.S. citizens should carry their naturalization papers or other proof of citizenship. Persons under 18 years of age should carry a notarized letter from their parents or guardians giving them permission to travel in CANADA or MEXICO.

Note: *Your driver's license is not considered valid proof of identification.*

No special driver's license or permit is necessary in either country; but, renew your license if it has expired, or will expire during the trip. proof of vehicle ownership is required at the border. If you are using someone else's unit, you should have a notarized letter authorizing its use.

MEXICO

A tourist card is necessary for visiting in MEXICO if you will be staying more than 72 hours or travel more than 40 miles from the border. Cards can be obtained at the port of entry or from a Mexican consulate.

Vehicles

Mexico requires a vehicle permit for every self-propelled vehicle. The permit can be obtained only from Mexican Auduana (customs) offices upon presentation of tourist card, vehicle registration and title or notarized statement from owner. Your insurance policy is not valid in Mexico. Temporary insurance must be purchased from Mexican companies (usually offices are located near the border).

CB Radio

Mexico currently prohibits the use of CB radios.

Hunting and Fishing

Hunting and fishing laws in Mexico are extremely complicated. To request information, contact:

Secretaria de Comunicaciones
Estados Unidos Mexicanos
Mexico DF

Dogs and Cats

Mexico requires a certificate signed by a licensed veterinarian. The certificate should describe the pet and show that the pet has been vaccinated for rabies within the past six months. A fee is charged for the required verification of the certificate by a Mexican consulate.

CANADA

Vehicles

Canada requires a Canadian Non-Residential Inter-provincial Motor Vehicle Liability Insurance card, which is available only from U.S. agents. All provinces in Canada require evidence of financial responsibility if visitors are involved in an accident. Limits vary from province to province. Contact your insurance agent for details.

CB Radio

CB radio operation in Canada requires a temporary license. To obtain such a license, write to:

Regional Director
Telecommunications Regulation Branch
Department of Communications
20th Floor
2085 Union Avenue
Montreal, Quebec H3A 2C3
Canada

Hunting and Fishing

Revolvers, pistols and fully-automatic firearms are prohibited in Canada. Each province has its own laws and licensing requirements. You must provide a written description and the serial number of each gun at the border. A license must be obtained from the province in which you intend to hunt or fish. Further information can be obtained by writing to the Department of Lands and Forests, Wildlife Branch, in the province you intend to visit.

Dogs and Cats

Canada requires a certificate signed by a licensed veterinarian in the U.S. or Canada stating that your dog has been vaccinated for rabies within the past 12 months. The certificate must contain a description of the dog and date of vaccination. Puppies under three months need no certificate. There is no restriction on the entry of healthy cats.

✓ Travel Preparation Checklist

CLOTHING

- Underwear
- Socks
- Shoes, sandals, boots
- Shirts
- Blouses
- Trousers
- Slacks
- Dresses
- Shorts
- Sweaters
- Jackets
- Coats
- Rainwear
- Swim wear
- Pajamas

TOOL CHEST

- Screwdrivers
- Pliers
- Hammers
- Tire pressure gauge
- Small level
- Electrical tape
- Masking tape
- Wrenches
- Furnace duct tape

CAMPSITE COMFORT

- Dishwashing soap
- Dishcloths
- Dishtowels
- Garbage/trash bags
- Mop
- Broom
- Vacuum cleaner
- Dust pan
- Paper towels
- Foil or plastic wrap
- Throw rug

SAFETY

- First-aid kit
- Flares
- Reflectors
- Tow rope and/or chain

ADDITIONAL TOOLS

- Hatchet
- Shovel
- Saw
- 12-volt portable tire pump

SLEEPING GEAR

- Sheets
- Pillow cases
- Mattress pads
- Blankets
- Pillows
- Sleeping bags

PERSONAL COMFORT

- Towels
- Washcloths
- Toilet paper
- Soap
- Toothbrush
- Toothpaste
- Personal toiletries
- Scissors
- Sewing kit
- Ash trays

MEAL PREPARATION

- Bottle opener
- Can opener
- Matches
- Pots, pans, skillets
- Plates
- Glasses and cups
- Silverware
- Hot pads
- Knives, spatula, etc.
- Baking pans
- Coffee maker
- Toaster
- Plastic containers

ENTERTAINMENT

- Books/magazines
- Binoculars/telescope
- Camera, film, flash
- Tape player/tapes
- Toys/games
- Playing cards
- Television
- Radio

MISC. EQUIPMENT

- Bucket
- Fuses
- Fresh water hose
- Y-type water hose fitting
- Flashlight
- 20-ft. 3-prong power cord
- 4- to 3-prong adapter
- 3-prong adapter with ground-
ing wire
- Wheel chocks, leveling ramp,
blocks or jack stands
- Coat hangers
- Folding lawn chairs

LOADING

A properly loaded vehicle is safe and easy to drive. Distribute your cargo evenly from side-to-side and from front-to-back.

Heavier items should be stored as centrally as possible, on or near the floor. They should be secured so that they cannot slide during a sudden stop and cause damage. (Loose cargo can alter the balance you had when you started.) Lighter items can be stored in overhead cabinets or other areas. Remember to leave space and weight allowance for souvenirs and other items you may purchase during your travels. A properly loaded unit can help conserve fuel and can prevent excessive wear on your vehicle's automotive system.

WEIGHT DETERMINATIONS

If you plan to carry more than several hundred pounds of cargo in your RV, it is extremely important that you weigh your unit before you leave on a trip. Check the Gross Axle Weight Rating (GAWR) and the Gross Vehicle Weight Rating (GVWR) found on the Federal Sticker affixed to each vehicle. The Federal Sticker or certificate lists the unit Serial Number and the front and rear GAWR and GVWR. It is located just behind the drivers door on the inside of the vehicle. The rating listed on the sticker is for the specific wheel and tire sizes listed. We suggest that you record this sticker information in the space provided on the specifications page in this manual to ensure that you always have the information close at hand.

You can weigh your vehicle at a grain elevator, sand and gravel dealer or government weighing station. Make an appointment to weigh your unit fully loaded. There may be a small fee for weighing your vehicle; however, it is an investment in safe traveling and peace of mind. Check your Yellow Pages for the address and telephone number of the weighing facility nearest you.

Note: Exceeding the GVW and GAW specifications for your unit could result in serious damage to the suspension, frame or other components of your vehicle. Use of heavier suspension components (springs, shocks, axles) or heavier-ply tires does not increase the weight ratings printed on the tow vehicle's Certification plate. The

GAWR of each axle is determined by the axle system components with the lowest weight-carrying capacity. To avoid overloading your vehicle, check the GVWR and GAWR.

DEFINITIONS

GVWR (Gross Vehicle Weight Rating)—The maximum permissible weight of your unit, all options, passengers and cargo.

GAWR (Gross Axle Weight Rating)—The allowable weight, including cargo, which can safely be supported by each axle.


GVW (Gross Vehicle Weight)—is the actual weight of the unit and all standard and optional equipment, cargo and passengers.

GAW (Gross Axle Weight)—is the portion of the fully-loaded vehicle weight which is transferred to each axle.

Note: GVW and GAW are found by weighing the vehicle fully loaded.

VEHICLE WEIGHING

STEP 1—Drive only the front axle of the motorhome onto the scale. Compare the weight to the front GAWR listed on the Federal Sticker.

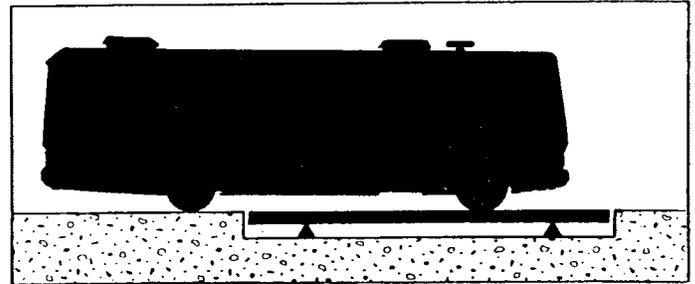


FRONT GROSS AXLE WEIGHT

STEP 2—Pull forward so that the front and rear axles are on the scale. Compare the weight to the GVWR listed on the Federal Sticker.


MFD. BY:	DATE				
INC. VEH. MFD. BY:	DATE				
	GAWR LB	TIRES	PSI COLD SINGLE	PSI COLD DUAL	RIMS
FRONT					
INTER-MEDIATE					
REAR					
GVWR LB	MODEL NUMBER				
TYPE:	VEHICLE I.D. NUMBER				
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT IN:					

FEDERAL STICKER

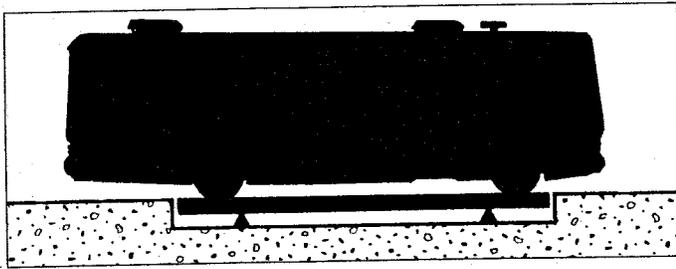

GROSS VEHICLE WEIGHT

STEP 3—Pull forward so that only the rear axle is on the scale. Compare the weight to the rear GAWR listed on the Federal Sticker.

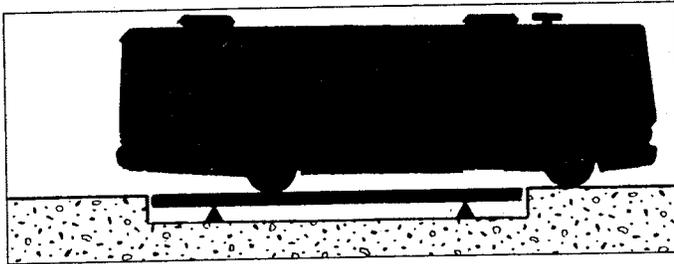

REAR GROSS AXLE WEIGHT

Note: If any of the weights exceed the listed rating, relocate the passengers and redistribute or remove a portion of the cargo until the weight is within the proper tolerance.

DRIVING

Get to know how your vehicle handles. Power steering and air brakes help make driving your motorhome as effortless as possible, but you must remember it is longer, higher, wider and heavier than a family automobile, and the driving compartment is located forward of the front wheels.

Before leaving on a trip, practice making right and left turns, braking, backing and accelerating. Your RV is designed to travel at maximum legal highway speeds under ideal conditions. Under less than ideal conditions, your vehicle should be operated at reduced speed and it should never exceed the posted legal speed limits.

GENERAL DRIVING CHECKS

For your safety, make certain that the following items have been checked and rechecked before you take your Rear Diesel on the road.


Hydraulic Levelers—Must be in the travel position. Visual check is recommended.

Lights—The following lights should be tested: brake lights, warning lights, flashers, clearance lights taillights and headlights.

Side Mirrors—Adjust the driver and passenger side mirrors so that the driver can see the right and left sides of the unit. Learn to check traffic conditions to the rear frequently, even when cruising wide-open highways, to avoid surprises.

Tires—Before each trip, check your tires for uneven wear, road damage, foreign objects or excessive peeling or bulging. Each morning, check tire condition and air pressure. Heat generated by surface friction will increase the tire's pressure approximately six to nine psi; therefore, do not bleed air out of a hot tire. Inflate the tire to the recommended pressure (indicated either on the tire or in the manufacturer's instruction booklet).

Note: Proper tire inflation is extremely important.

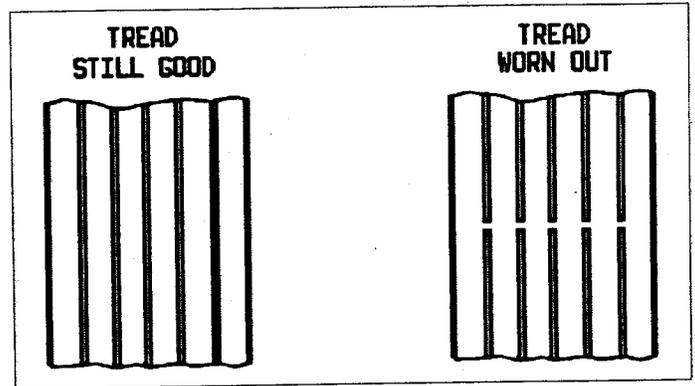

TREAD WEAR INDICATOR

A tire should be replaced when:

1. It is worn to 1/16 inch depth in two or more adjacent grooves.
2. It is worn to the level of the tread indicators that are molded into the bottom of the tread grooves, or
3. The indicators appear in two or more adjacent grooves at three locations around the tire.

On new tire purchases, be certain that the new tire is the same size as the old tire and that the new tire has the same ply rating and load range as the old one.

Wheel Lugs—Wheel lugs must be tightened every 50 miles for the first 200 miles whenever a wheel has been reinstalled. Thereafter, check lugs after storage. Refer to chassis owner manual for wheel lug torque.

Power Cord—The 120 volt shoreline power cord must be unplugged from the external source and placed into its compartment. The cord hatch must be secured before you travel.

Water Fill Hose(s)—All hoses must be disconnected and all hose caps must be secured before you travel.

Sewage Termination Valves—These valves must be closed and locked before you travel. The sewer hose must be removed from the termination valve outlet and stored in the appropriate compartment. Termination caps must be securely fastened to the termination valve outlet(s).

Windows and Vents—All windows and vents should be closed completely or adjusted as desired before you travel.

TV Antenna—The TV antenna must be cranked down to its traveling position.

Automotive System—The automotive system of your vehicle should be serviced and maintained as outlined in the chassis owner's manual.

Interior Doors and Drawers—Close and secure all interior doors and drawers in your motorhome. Store or secure all loose items.

Exterior Access Doors—Exterior access doors for storage and equipment should be closed and locked.

OPERATING YOUR VEHICLE

CLEARANCE

Be sure to read "Clearance Height" signs on overpasses, drive-through windows, etc. Watch out for overhanging tree branches, awnings or similar obstructions that can damage your vehicle's roof or roof-mounted equipment and accessories. Check the specifications page in this manual or check with your dealer for clearance measurements of the unit.

PULLING INTO TRAFFIC

Check for oncoming traffic in all directions. Signal before entering the flow of traffic. Always accelerate slowly and smoothly; the weight of your RV makes quick acceleration not only difficult but potentially unsafe.

PASSING

Avoid sudden maneuvers when passing a slower moving vehicle. Remember that additional time and distance are required to pass safely. Wait until the road is clear of oncoming traffic for at least 1/2 mile. Check the outside rearview mirrors and signal lane change. Have safe clearance, signal lane change and return to your original lane.

BRAKING

Your Coachman Rear Diesel is equipped with dual air brakes. Read thoroughly your Chassis Owners Manual for a complete description of the system and driving and maintenance tips.

Normal Stops—Push the brake pedal down. Control the pressure so the vehicle comes to a smooth, safe stop.

Emergency Stops—You should brake so you can steer and so your vehicle stays in a straight line. Use one of the following tow methods.

Controlled Braking—This method is also called "squeeze" braking. Put on the brakes as hard as you can without locking the wheels. Do not turn the steering wheel while doing this. If you need to make large steering adjustments or if you feel the wheels sliding, release the brakes. Brake again as soon as the tires get traction.

Stab Braking—a) Press on the brake pedal as hard as you can. b) Release the brakes when the wheels lock up. c) As soon as the wheels start rolling, put on the brakes fully gain. It can take up to one second for the wheels to start rolling after you release the brakes. Make sure you stay off the brakes long enough to get the

wheels rolling again. Otherwise the vehicle may not stay in a straight line.

STOPPING DISTANCES

With air brakes there is an added delay after the brake pedal is pushed. Whereas the brakes on your car work instantly, with air brakes it takes a little time (one-half second or more) for the air to flow through the lines to the brakes. At 55 mph on dry pavement the brake lag distance adds about 32 feet to the total stopping distance. So at 55 mph for an average driver under good traction and brake condition, the total stopping distance is over 300 feet. This is longer than a football field.

EMERGENCY STOPPING

Always carry road flares or reflective warning signs to display, if necessary. Pull off the roadway as far as possible for emergency stopping or tire changing. Turn on your vehicle hazard warning flashers when parked alongside traffic lanes.

PARKING ON A GRADE

Parking your motorhome on an upgrade or downgrade is not recommended. If it is necessary in an emergency, always apply the foot brake, then set the parking brake before shifting the transmission to neutral. When preparing to move the vehicle, shift out of neutral before releasing the parking brake. On severe grades it may be necessary to have a passenger place wheel chocks behind the tires of your RV.

Note: Using the transmission to hold the vehicle on an upgrade may cause the engine or transmission to overheat.

DOWNGRADES

When going down long grades, use low gear and go slow enough that a fairly light, steady use of the brakes will keep you from speeding up. If you go slow enough, the brakes will be able to get rid of the heat so they will work as they should. Tests show that using the brakes hard and then letting up on them from time to time does not allow them time to cool as some people mistakenly believe.

UPGRADES

To avoid engine overheating when climbing a steep grade, reduce speed and shift the transmission to a lower gear.

OVERHEATING

If your motorhome's engine overheats, pull well off the road. Shift to neutral, engage parking brake and run the engine with your foot resting lightly on the accelerator pedal. If the engine does not cool within 2 to 3 minutes, turn it off and locate the problem.

Engine temperature problems may be avoided by following the instructions for Downgrades and Upgrades and turning off the dash air conditioner during those times.

SWAYING OR FISHTAILING

If this happens while you are towing a vehicle, accelerate slightly and then gradually slow down. If your unit still sways, pull off the road and check the following:

1. Towing Equipment
2. Distribution of cargo
3. Tire pressure
4. Motorhome front-end alignment and suspension

TURNING CORNERS


The distance from the rear axle to the back of the rear bumper is called rear overhang or angle of departure; and it is greater on a motorhome than it is on an automobile. On the highway this overhang poses no serious problem, but on narrow streets or in any situation requiring a tight turn, the arc of the swing of the rear end is dangerous to itself and to anything close by. The

longer the overhang, the greater the swing of the arc. The swing of the arc is always opposite to that of the turn; so for example when you turn to the left, your right rear swings out.

When making a right turn, pull into the intersection past the curb a little further than you would with an automobile to avoid hitting or driving over the curb with your tires. The sideview mirrors will aid you in this maneuver.

BACKING

Remember that your motorhome is higher, wider and longer than other vehicles you may own, so it is extremely important that you back the RV slowly. If your unit does not have the optional Rear Back-up Camera, visibility will be somewhat restricted and may require stationing someone beside the unit to guide the driver.

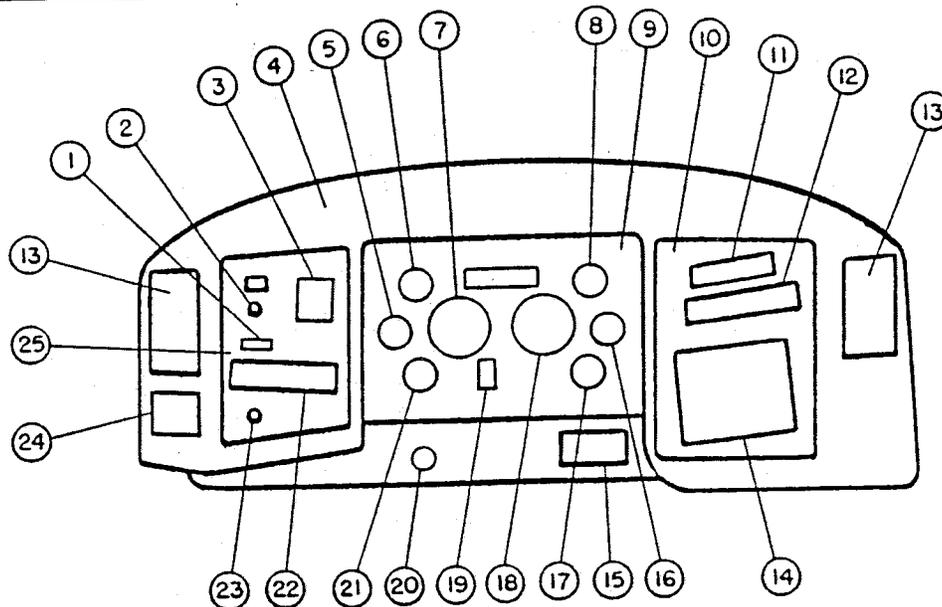

- | | |
|-------------------------------------------------------|-----------------------------------------|
| 1. Fader dial | 15. Spotlight control (optional) |
| 2. Headlight switch | 16. Voltmeter-VDO |
| 3. Stone-Bennett transmission selector (optional) | 17. Fuel Gauge-VDO |
| 4. Dash pod | 18. Tachometer-VDO |
| 5. Oil pressure gauge-VDO | 19. "Antenna up" "jacks down" indicator |
| 6. Front air gauge-VDO | 20. Ignition |
| 7. Speedometer-VDO | 21. Water temperature gauge-VDO |
| Speedometer-Teleflex | 22. Switches |
| 8. Rear air gauge-VDO | "Defrost fan" |
| 9. Center panel-Royal | "Energ. start" |
| Center panel-Santara, Pathfinder | "Compt. lights" |
| 10. Right panel-Royal | "Map lights" |
| Right panel-Santara, Pathfinder | "Dock'g lights" |
| 11. A/C-heat control | "Rear heater" |
| 12. Radio | 23. Cigarette lighter |
| 13. A/C louver | 24. Remote mirror control (optional) |
| 14. Back-up monitor-Sony (optional) | 25. Left panel-Royal |
| Hinged door-Royal | Left panel-Santara, pathfinder '92 only |
| Hinged door-Santara, Pathfinder | |
| 93 Santara, Pathfinder w/mon. (run H38 and after) | |
| 93 Santara, Pathfinder w/glovebox (run H38 and after) | |

1992 ROYAL, SANTARA AND PATHFINDER REAR DIESEL
1993 SANTARA AND PATHFINDER REAR DIESEL
DASH ASSEMBLIES

FREEING A STUCK VEHICLE

To pull your motorhome out of the snow, sand or mud, apply slight pressure to the accelerator pedal and shift the transmission rhythmically between forward and reverse gears.

*** CAUTION ***

Prolonged rocking, even at low speeds, may cause engine overheating, transmission and axle damage or failure, or tire damage.

TIRE CHANGE


Your Rear Diesel is equipped with heavy-duty truck tires weighing upwards of 150 lbs. Due to this fact, both Coachmen and the chassis manufacturer recommend that tire changes be done only by a professional tire service.

TOWING

If your Class A motorhome is equipped with an optional hitch towing package, do not exceed the Gross Combined Weight Rating (GCWR) as stated in the chassis manufacturer's owner's manual. If you add an optional hitch towing package refer to the hitch manufacturer's manual for complete instructions

AIR CYLINDER SUSPENSION

Your Rear Diesel may be equipped with front and rear air cylinder suspension. Air pressure in these cylinders is set at the factory for optimum ride and coach height. If necessary, the cylinder pressure can be adjusted by means of one valve on the rear suspension and two valves on the front. If you suspect a problem with your coach's suspension consult with your chassis manufacturer/dealer.

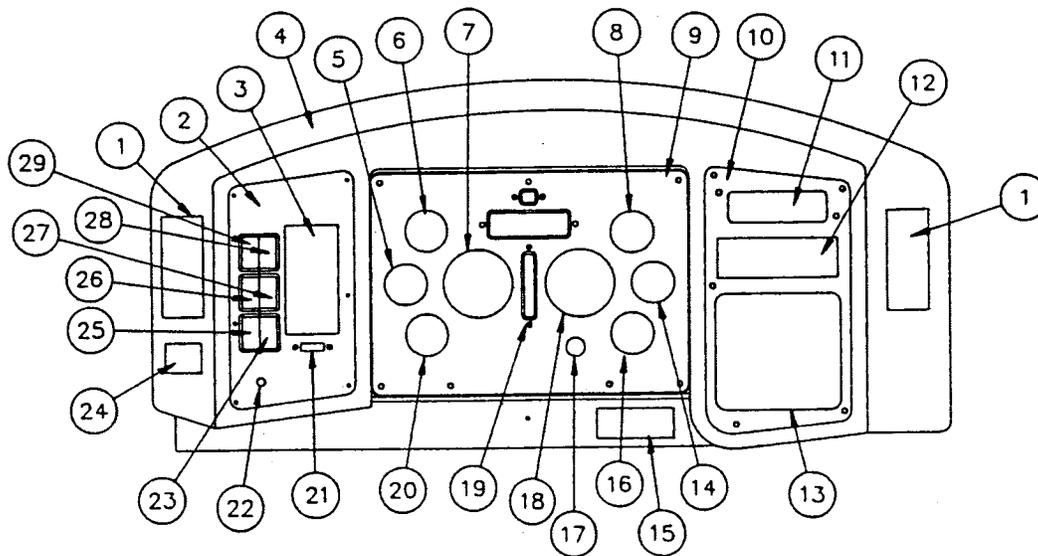

- | | |
|-------------------------------------|-----------------------------------------|
| 1. A/C louver | 15. Spotlight control (optional) |
| 2. Left panel | 16. Voltmeter-VDO |
| 3. Allison transmission control | 17. Cigar. lighter |
| 4. Dash pod | 18. Tachometer-VDO |
| 5. Water temperature gauge-VDO | 19. "Antenna up" "jacks down" indicator |
| 6. Front air gauge-VDO | 20. Oil pressure gauge-VDO |
| 7. Speedometer-VDO | 21. Fader dial |
| 8. Rear air gauge-VDO | 22. Headlight switch |
| 9. Center panel | 23. "Emergency start" switch |
| 10. Right panel-Royal | 24. Remote mirror control |
| Right panel | 25. "Compartment lights" switch |
| 11. A/C-heat control | "Block heater" switch |
| 12. Radio | 26. "Map light" switch |
| 13. Back-up monitor-Sony (optional) | 27. "Docking lights" switch |
| Hinged door | 28. "Rear heater" switch |
| 14. Fuel gauge-VDO | 29. "Defrost fan" switch |

AIR BRAKE SYSTEM

Air brakes use compressed air to make the brakes work. Air brakes are a safe way of stopping large vehicles if the brakes are well maintained and used right. Normal system air pressure for your motorhome is 120 psi.

Air brake systems are three braking systems combined: the service brake system; the parking brake system; and the emergency brake system. The **service brake** system applies and releases the brakes when you use the brake pedal during normal driving. The **parking brake** system applies and releases the parking brakes when you use the parking brake control. The **emergency brake** system uses parts of the service and parking brake systems to stop the vehicle in the event of a brake system failure.

PARKING BRAKE

All large vehicles such as your motorhome must be equipped with parking brakes and emergency brakes. They must be held on by mechanical force (because air pressure can eventually leak away). Spring brakes are used to meet these needs. When driving, powerful springs are held back by air pressure. If the air pressure is removed, the springs put on the brakes. A parking brake control allows the driver to let air out of the spring brakes. This lets the spring put the brakes on. When the parking brake is released, air pressure again forces the springs back.

EMERGENCY BRAKES

A leak in the air brake system which causes all the air to be lost will allow the springs to put on the brakes without any action by the driver.

When air pressure drops to 40 to 60 psi, the low air pressure warning buzzer alerts the driver that the emergency brakes are about to be applied. Do not wait for the brakes to come on automatically. When the buzzer sounds bring the vehicle to a safe stop right away while you can still control the brakes.

* CAUTION *

Never push the brake pedal down when the spring brakes are on. If you do, the brakes could be damaged by the combined forces of the springs and the air pressure. Many brake systems are designed so this will not happen. But not all systems are set up that way, and those that are may not always work. It is much better to develop the habit of not pushing the brake pedal down when the spring brakes are on.

AIR TANK DRAINS

Compressed air usually has some water and some compressor oil in it which is bad for the air brake sys-

tem. For example, the water can freeze in cold weather and cause brake failure. The water and oil tend to collect in the bottom of the air tank. Therefore each air tank is equipped with a drain valve in the bottom. You must drain the tanks at the end of each day of driving.

Note: Read thoroughly your chassis owner's manual for information on maintaining your coach's air brake system. Your Coachmen dealer will be happy to assist you in answering your question.

CAMPING

CAMPSITE SELECTION

There are many campground guides that will assist you in making your selection. Many campgrounds accept reservations, and during peak seasons, it is wise to make a reservation. If possible, arrive early so you can inspect and choose your campsite during the daylight hours.

During the winter months it is desirable to take advantage of natural windbreaks like trees, bushes or any similar type of windbreak. This will cut down the possibility of cold drafts that can affect the comfort level of your unit.


Common courtesy will help make your stay more pleasant. Campsites often are close together and loud noises may disturb neighboring campers. Follow the posted rules of the campsite. Open fires might not be permitted. If you are permitted to build a campfire, clear the area of all flammable materials; never leave a campfire unattended, and always make certain the embers are completely extinguished before leaving the campfire or before going to sleep. Good RVers are proud of the fact that they always leave a campsite cleaner than they found it.

SET-UP

It is very important that your unit is level. This allows your refrigerator and drainage systems to operate properly (both function by gravity). To determine levelness, place a level on the bottom of the refrigerator's freezer compartment or on a normally level location inside the vehicle. You may wish to permanently attach levels (available at your dealer) on the front and/or back and sides of the RV. This will allow you to tell at a glance if you've stopped on a level site and will help speed the leveling process.

LEVELING

If the unit needs side-to-side leveling, make a step leveling ramp on the low side out of 1x6" or 2x6" boards of varying lengths. Pull the unit forward or back onto the leveling ramp until the tire(s) on the low side is level. Many experienced RVers carry level boards or blocks in their unit for this purpose.

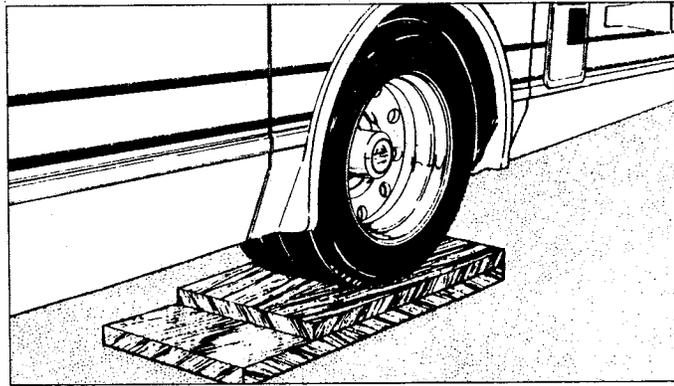

STEP LEVELING RAMP

COMPUTERIZED HYDRAULIC LEVELING SYSTEM

The optional hydraulic leveling system for your coach consists of four (4) computer controlled hydraulic jacks designed to work in pairs; ie. front, right side, left side or rear. During the leveling operating the chassis air bag suspension system will partially deflate (if so equipped) to enhance the stability of the coach while on the jacks. The touch control panel which operates the leveling system is located inside the glove box on the passenger side of the vehicle.

Important: Read thoroughly your operators manual for complete instructions in the use and maintenance of this system.



DO NOT use hydraulic levelers for tire change. If used personal injury may result.

LIVING AREA

AIR QUALITY

State-of-the-art construction and energy conservation methods have been used in manufacturing your recreational vehicle. These improvements have substantially reduced air infiltration and air exchange, making them almost airtight. Therefore, regular airing of your unit is recommended, especially during periods of high temperature and high humidity, and after prolonged storage.


CONDENSATION

Condensation can be a problem in modern, tightly-constructed, well-insulated RVs. Certain amounts of condensation should be expected, especially on cool surfaces such as windows, roof vents, and metal door frames. However, when there is excessive condensation—the troublesome kind that blocks all windows with fog or frost—damage to walls, woodwork and ceilings can occur.

Remember that sweating windows are a signal indicating that moisture is trying to get out to mix with drier air.

CONTROLLING CONDENSATION

When the unit is closed tightly, especially in cold weather, the small air volume in your RV can absorb only a certain amount of moisture. Bathing, dish washing, laundry appliances and unvented gas burners are among the causes of added moisture in the air—all pouring more water vapor into your RV. You can control the amount of moisture in the air by allowing the moisture to escape to the outside. Use your vent hood and fan when you cook; keep bathroom door closed and the

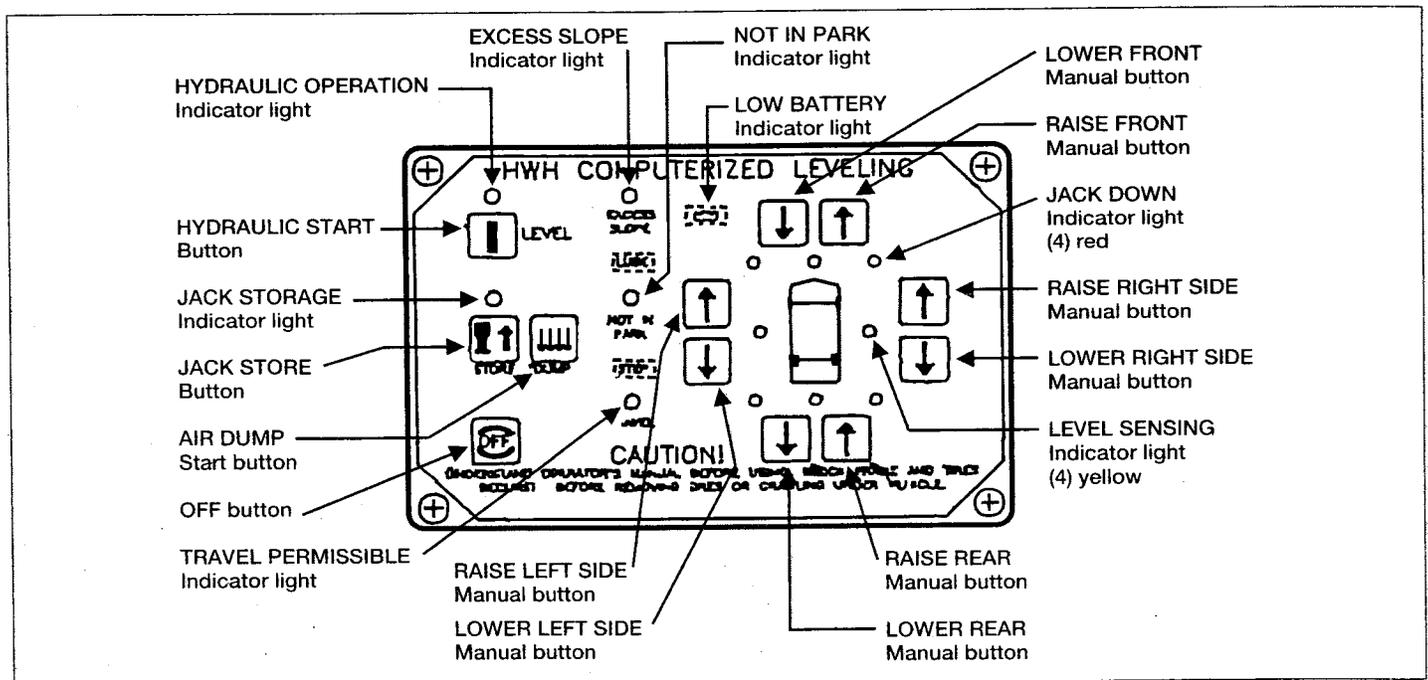


HYDRAULIC LEVELER PANEL

vent or window open while you bathe or shower (and for a short time after you have finished bathing or showering, to allow all the moisture to dissipate) and don't hang wet clothes in your unit.

SOFA

Your Rear Diesel is equipped with a jackknife sofa in the front living area to provide convenient and comfortable sitting and sleeping accommodations. Refer to the illustration or ask your dealer to demonstrate its operation.

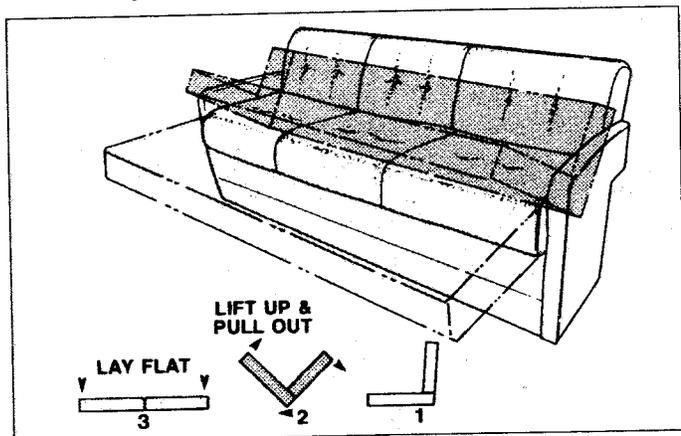


JACKKNIFE SOFA

DINETTE BED

The dinette bed is equipped with a swing up table. To operate, move the leg to the "UP" position and pivot the table down to the dinette seat supports. Place the table on the seat supports and arrange the cushions on the top.

To raise the table, pull the table toward you and up; then push it toward the wall. Insert tabs at back of table into the wall brackets. Pull the leg down and adjust to the proper height.

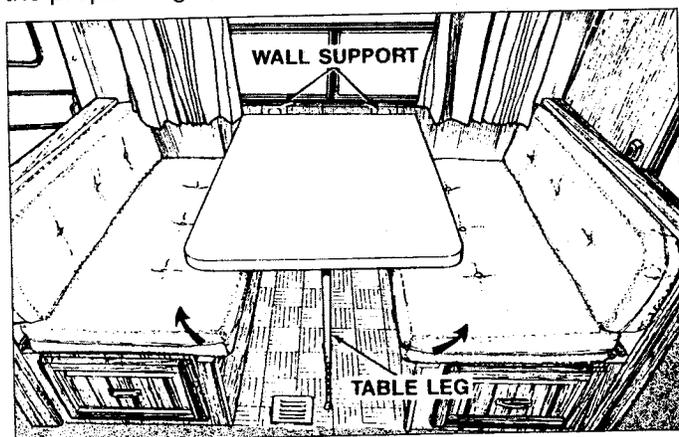

SWING UP TABLE

DRIVER AND PASSENGER CHAIRS

Some driver and passenger chairs slide, swivel and recline; others may slide and swivel or slide only. All the chairs operate manually except for the optional electric drivers chair. Have your dealer demonstrate the operation of the chairs in your unit.

WINDSHIELD DRAPES

The windshield drapes are designed to provide privacy when parked and slide along a track over the sun visors. The drapes meet in the center of the windshield when closed. Secure with tiebacks on either side of the unit when open.

EMERGENCY EXIT WINDOW

The Emergency Exit Window is located in the bedroom at the rear of the coach.

To operate the Emergency Exit Window, lift red handle on each side of the bottom of the window and push window out.

Important: Before traveling ensure that all occupants of the coach are familiar with the operation of the Emergency Exit.

SMOKE DETECTOR

The smoke detector in your coach is powered by one 9 volt carbon-zinc battery (alkaline batteries may also be used). Use only the following replacement batteries. Use of other batteries may cause a malfunction of the detector.

Eveready 216, 1222 or 522
Gold Peak 1604P or 1604S
Duracell 1604

The battery should last at least one year under normal operating conditions. When the battery reaches the end of its normal life, a low battery warning (intermittent beeping) will indicate the need for replacement.

Important: Test smoke detector operation after RV has been in storage, before each trip and at least once per week during use.

FIRE EXTINGUISHER

The fire extinguisher in your unit is located just inside the main entrance door on the right.

Please read the operating instructions that are printed on the fire extinguisher. If there is any doubt on the operation, you and your family should practice, then replace or recharge the extinguisher.

CARBON MONOXIDE DETECTOR

Your coach may be equipped with a carbon monoxide detector designed for years of trouble free service. It is powered by the RV battery/converter. If the carbon monoxide level in the coach rises above a preset level for a specified number of minutes, the alarm will sound until the reset button is pushed. The detector is located on the wall near the entrance to the bedroom.

Important: Refer to the accompanying owners manual for complete operation, maintenance and testing procedures.


SAFETY SEAT BELTS

Seat belts are an important safety feature of your vehicle. For your protection, fasten all seat belts while

your motorhome is in motion. Adjust the belt low on the abdomen and as snugly as comfort will allow, for greatest safety. Never use a belt for more than one person at a time.

Note: All occupants should be furnished with and use seat belts while the vehicle is in motion. Do not occupy the beds while traveling as safety protection is not provided.

INFANT AND CHILD RESTRAINTS



For maximum protection in your unit children should not be transported unrestrained. Infants should be placed in infant carriers. Small children should be restrained in child safety seats. These seats should be placed in the vehicle in accordance with the instructions with the seat or infant carrier.

ELECTRICAL SYSTEM

Your motorhome contains two separate electrical systems: one 12 volt direct current (DC) and one 120 volt alternating current (AC), similar to the one in homes. These systems provide you with power while you are camped or are traveling. The 120 volt system requires an external source of 120 volt electricity, usually a campsite receptacle or the use of the auxiliary generator. The 12 volt electrical system is supplied by batteries, the power converter or the 12 volt source from the automotive chassis.

To reduce the 12 volt load on your RV batteries, the 120 volt system should be used whenever a 120 volt hook-up is available. Although most components in your unit (water pump, range hood light and fan, interior lights) operate only from a 12 volt source, the power converter changes 120 volt AC to 12 volt DC power.

120-VOLT SYSTEM

The 120 volt system supplies power for the following through the power center: refrigerator, exterior receptacles, interior receptacles (used to operate regular household appliances), and optional roof air conditioner. The converter provides 12 volt power for all of the unit's 12 volt components. When the external 120 volt power cord is used, the power is connected directly into the main electrical service panel of the power center and is distributed through circuit breakers.

GROUND FAULT INTERRUPTER/RECEPTACLE

The bath and exterior receptacles are protected by a ground fault interrupter (GFI). The GFI is a highly sensitive circuit breaker, built into the bath and kitchen

receptacles, and connected to the outside receptacle. It protects against severe electrical shock, if a ground fault occurs in that circuit. The GFI senses the fault and breaks the bath and exterior receptacle circuits. If this should happen, unplug all appliances on that circuit and reset the breaker in the bath or kitchen receptacle.

The GFI system should be tested at least once a month. To test the GFI system, plug a test light into the outlet and push the "Test" button on the receptacle. The test light should go out. To restore power, push the "Reset" button. If the button does NOT pop out or if the test light indicates a live circuit, DO NOT use the outlets. Contact your Coachmen dealer.

SHORELINE CONNECTION

The Shoreline is a heavy-duty, 50 amp cable with a 4-prong plug which supplies 120 volt A/C to the power center. It can be pulled from its storage compartment through its access port and connected to a matching receptacle.

* CAUTION *

If there is no 50 amp receptacle available, and you must use an adapter, the usable amperage will equal the rating of the adapter and the receptacle being used.

On some models, the 50 amp service is optional. If this option was not ordered on your RV, then it will be equipped with a 30 amp service and a 3-prong plug.

* CAUTION *

If there is no 30 amp receptacle available, and you must use an adapter, the usable amperage will equal the rating of the adapter and the receptacle being used.

The 120 volt system is protected by the circuit breakers. If a circuit breaker opens, unplug the appliance(s) on that circuit, allow a short period for the breaker to cool, and rest the breaker. If the breaker continues to open, it may be caused by an appliance you have added, or a fault in the electrical system. If you determine it may be a fault in the electrical system contact your Coachmen dealer.

THE 12 VOLT SYSTEM

The 12 volt system, which includes the automotive battery and RV batteries, plus the 12 volt converter, supplies power to the exterior lights, the range hood fan and light, the furnace blower, water pump, interior 12 volt receptacles, porch light and monitoring panel. The 12 volt receptacles can only be used for appliances specifically designed for that type of energy. The 12 volt energy is supplied by the automotive battery, the RV battery or the power converter.

The automotive alternator supplies 12 volt power to the vehicle's lights and components and the RV's 12 volt system, including running lights, brakes and appliances, when the engine is running. The automotive alternator also will charge the RV batteries.

The RV batteries supply power to the furnace blower, monitoring panel, water pump, interior 12 volt receptacles, optional power vents(s), range hood fan and light and interior lights. The RV batteries are charged by the power converter whenever you are using a Shoreline connection, generator, external 120 volt power source, or the chassis engine.

To check the battery using the monitor panel, disconnect the Shoreline and turn on at least three interior lights. (A discharged battery will show full charge unless some electricity is being drawn.) With extremely heavy usage, battery water level should be checked daily.

CONVERTER

The power converter section of the power center transforms 120 volt AC into 12 volt DC to supply power to all of the 12 volt systems. Each 12 volt circuit is protected by a fuse in the power center. Turn the twist lock to open the door and check the fuses. A listing of the circuits is on the inside of the door. Some fuses protect circuits with more than one function; others may be for specific appliances.

If a fuse is blown, turn off or unplug all appliances on that circuit. Replace the blown fuse with one of the same ampere rating. If the fuse continues to blow, notify your dealer. See the power center manufacturer's manual for specifications and operation and testing procedures.

IN-LINE FUSES

In-Line fuses or over-current protective devices are installed in your RV storage battery hookup whenever the battery supplies 12 volt current to the RV. The in-line fuses will be located within 18 inches of the battery (power supply) for easy access and working room.

*** CAUTION ***

DO NOT replace a fuse with one of a higher AMP rating

AUXILIARY GENERATOR

The auxiliary generator is a gasoline-, diesel- or LP gas-operated unit that provides 120 volt electricity. Its fuel supply is from the coach fuel tank or LP gas supply tank. The generator can be operated when your vehicle is stopped or traveling. A remote switch is located inside the coach on the monitor panel. There is also a start/stop switch mounted on the generator. An automatic transfer switch incorporated in the power center prevents the simultaneous use of the generator and the shoreline connection. When the generator is started, the transfer automatically switches from shoreline to gener-

POWER DISTRIBUTION CHART

CHASSIS BATTERY	POWER CENTER AND/OR 12-VOLT BATTERY	120-VOLT ELECTRICAL
Battery disconnect	Battery disconnect	Power center
Starter (engine)	Generator starter motor	All receptacles
Head lights	All interior lights	Refrigerator
Taillights	Porch light	Air conditioner(s)
Stop lights	Trunk lights	Microwave
Turn signals	Power steps	Central vacuum cleaner
Parking lights	Leveling system	Food processor
Backup lights	Water pump	Washer/dryer
Clearance lights	Monitor panel	VCR
License plate lamp	Range vent	VCP
Spot light	Power roof vent	
Dash lights	Television (front & rear)	
Map lights	Television antenna	
Horn	Water heater (electronic ignition)	
Windshield wipers	Furnace (electronic ignition)	
Electric windows	Grab handle (lighted)	
Backup monitor	Refrigerator controls	
Security system		
Heater fans (front & back)		
Defrost fans		
Heated mirrors		
Radio		
Power seats		
Spot light		

ator power. When the generator is shut down, the transfer automatically switches to shoreline power. Every time you start the engine there is a 30 to 45 second delay before the coach electrical load is connected. This allows the generator to reach normal operating speed with no load.

A remote combination generator preheat, start and stop switch is located on the monitor panel inside the coach (diesel only). When the generator is off, the first acutation of the switch starts a 30 second generator pre-heat cycle. the small LED indicator below the switch will blink on and off at a 2 second rate for 16 cycles to indicate that the pre-heat is on. Once this pre-heat cycle is started, the switch acts as a starter switch. At the end of the 30 second period, the LED will blink at a rapid rate for an additional 30 seconds to indicate that the pre-heat cycle is complete. Pressing the switch at any time during this time will activate the starter. At the end of the second 30 second cycle, the system resets and is prepared to restart. Once the generator is running, the LED will stay on. Approximately 10 seconds later, the switch becomes a "Touch and Let Go" to stop button.



Exhaust gas presents the hazard of severe personal injury or death. Do not open roof vents, windows or doors when generator is running as these could draw fumes into your coach. Do not operate the generator where an object such as a tree, bush or building can deflect exhaust to the inside of your unit.



Do not ignite the water heater until water heater tank is full. If it is not full, it will cause permanent damage to the water heater tank.


Although a common garden hose can be used to fill the water tank and connect to city water, longtime RV'ers recommend a hose specifically manufactured for this, available at your RV dealer. Keep a close watch while filling, so as to not overfill and cause damage to tank and surrounding structure.

To fill the fresh water tank, connect a hose to the city water fill. Place the operation valves in the tank fill position, then turn water on. When tank shows full on the monitor panel, or water flows out of overflow/vent hoses, turn water off. Place operation valves in normal position and remove hose. Turn water pump on, open hot water faucet until water flows. Turn hot water faucet off and repeat with cold water faucet. The water pump should shut off and not come on until a faucet is opened.

FRESH WATER SYSTEM

Fresh water is supplied either by the vehicle's fresh water tank, using the 12 volt demand pump, or by an exterior pressurized source (city water).

The water heater is an LP gas appliance that heats water to a preset temperature. To fill the water heater, simply turn on a hot water faucet. When water flows steadily, turn the faucet off.

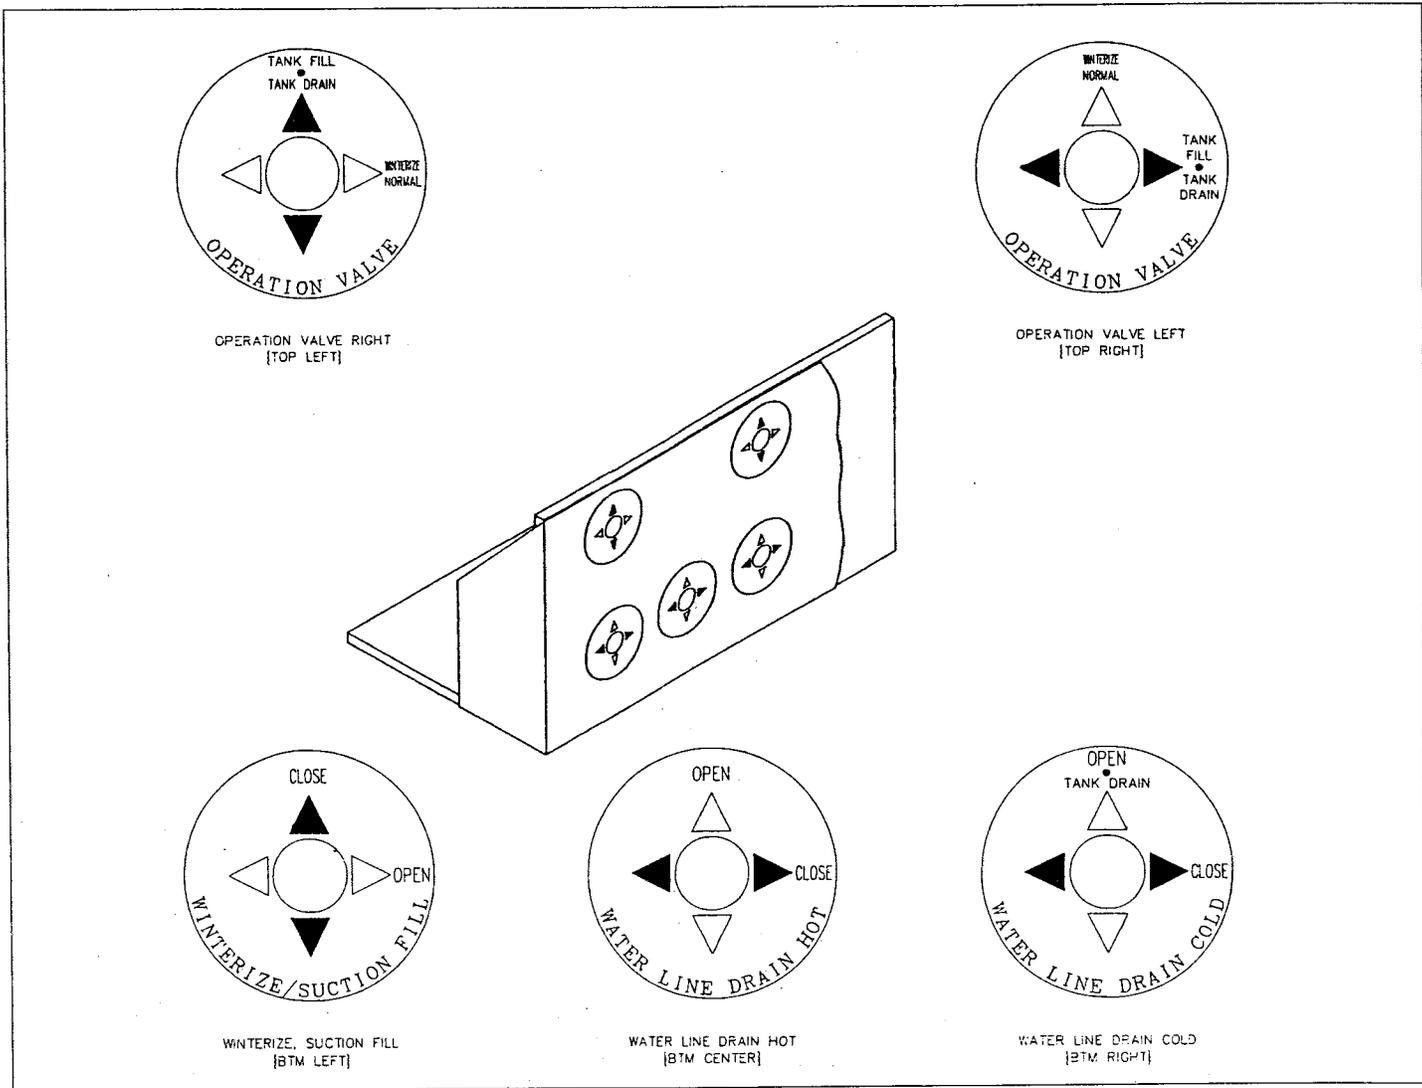

WATER VALVE CONTROL PANEL

To use city water, connect a hose to the city water fill. Place the operation valves in the normal position. Turn water on, then open a hot water faucet until water flows. Turn faucet off and repeat with cold water. Water pump should be shut off for city water use. NOTE: in areas where city water pressure exceeds 60 PSI, you should use a pressure regulator. Excessive water pressure may damage lines, connections, or other system components.

To add water to the tank where a city water hook up is not available, use the following procedure;

After filling a water container, place the short piece of hose provided into the water (on some units, a plug may have to be removed and the hose installed in place of the plug). Place the operation valves in the tank fill position, and open valve in line to hose, or open suction fill valve. Turn water pump on. The pump will draw water from the container into the water tank. You may have to refill the container several times to completely fill the tank. After tank is full, turn operation valves back to normal position and close suction fill valve (or valve in line to short hose).

To drain water system/tank, place the operation valves in the tank drain position, open the water line drain valves and open all hot and cold faucets.

SANITIZING THE WATER TANK

The water tank on your Rear Diesel is located beneath the floor of the unit just forward of the rear axle. The water tank should be sanitized before you use it for the first time; after a period of nonuse; and whenever you suspect the tank is contaminated. To sanitize your water tank, first empty the tank and then use the following procedures:

1. Make 2-1/2 cups of liquid household bleach with 10 gallons of water into a potable water container. Follow procedure for adding water to water tank where no city water hook up is available.
2. Turn the vehicle's water pump "ON," open the hot water faucet, wait until the water begins to flow, and then turn the faucet "OFF." Do the same with the cold water faucet. Wait three hours.
3. Open faucets and line drains. Drain the entire system. Some solution will remain in the water heater.
4. Connect a hose to the city water fill. Begin filling the tank, Open the hot water faucet. Be sure the water pump is on. Let the water run until the system is completely flushed. Do the same with the cold water faucet. The hot water faucet will need to run longer to completely drain the water heater.
5. If a chlorine taste lingers, flush the system with a vinegar and water solution (one quart of vinegar to five gallons of water). Wait two to three hours and then flush with fresh water.

WATER PUMP

The water pump is a 12 volt DC appliance that is activated by a switch on the monitor panel. (On some models a second switch may be located in the bathroom). The switch can be left on while camping. When you want water, simply open a faucet. The pump which supplies water from the fresh water tank will run only as long as is needed. If the pump fails to start when the switch is on, check the fuse located in the converter. If the pump continues to operate whether the faucets are opened or closed, check the water tank. It might be empty, or there might be a leak in the system. If the city water hose is connected, the pump is not required.

Refer to the water pump manufacturer's material for additional troubleshooting and winterizing information.

LEAKS

Traveling over bumpy or rough roads can cause pipe fittings to loosen. Check the pipe fittings in your unit regularly for signs of leakage.

DRAINAGE/SEWER SYSTEM

Your Rear Diesel is equipped with a drainage sewer system that functions much the same as the one in your home. This system includes drain lines from the kitchen sinks, lavatory, tub/shower and marine type toilet to a gray-water holding tank and/or a sewage holding tank.

The drainage system also includes vents that carry odors (caused by drain water and waste) out through the roof. The drainage system vents also equalize the air pressure, which is necessary to maintain a water barrier against odors in the P-traps and to ensure smooth flow and escape for your drainage system.

TOILET

Flush the toilet before initial use and after emptying the holding tank, this will help to prevent collection of solids. To help control odors, there are a number of toilet and holding tank treatment concentrates on the market. These chemical concentrates are available at your Coachmen dealer.

To operate the toilet, step on the small pedal to add water to the bowl. When you have the desired amount of water in the bowl, slowly release the pedal. To flush this type of toilet, step on the large pedal until the water swirls and then slowly release the pedal.

When you clean your toilet, do not use highly concentrated or highly acidic household cleaners (no scouring powder). If the pedal does not move freely, apply silicone spray. To ensure proper operation and maintenance, refer to your toilet manufacturer's operating manual.

HOLDING TANKS

Your drainage/sewer system has two holding tanks:

Gray Water and Waste (black) water. The gray water holding tank collects water from the kitchen sink, lavatory and tub/shower. The waste (black) water holding tank is used to collect waste from the toilet.

To prevent unnecessary accumulation of solids in the waste holding tank, do not put facial tissues or similar products into the toilet. It is highly recommended that you use only bio-degradable toilet tissue available from your Coachmen dealer. Holding tanks should be emptied frequently into a specified dumping station. Most campgrounds have dumping stations, often at each campsite, and many service stations and highway rest areas have waste dumping stations also. Before emptying the holding tanks, make sure your vehicle is level; emptying the holding tanks depends on gravity.

EMPTYING THE HOLDING TANKS

To empty the waste holding tank, remove the sewage drain hose from its storage area. Remove the cap from the termination outlet and connect the sewage drain hose.

Your Rear Diesel has a swivel sewage drain hose holder under the unit. Simply swivel the holder around, take off the cap and hook up to a dump facility. Swivel the termination down, reach down in holder, pull up end of hose, remove termination cap and hook up sewer hose. Now you are ready to pull the gate valves and dump your tank.

Do not use harsh drain cleaner chemicals or solvents in the drains. Drain cleanouts are installed on certain units at intervals to facilitate drain line cleaning or unclogging. Use a wrench to remove and replace drain cleanout plug.

While you are camped you may leave the gray water dump valve open only if the hose is connected and your campsite has a sewage hookup. Do not open the waste water dump valve until you want to empty the holding tank. If the waste water dump valve is left open, the rinse and flush water will run off and solids will be left to collect and harden in the bottom of the tank.

To drain a holding tank, pull out the dump valve slide handle. On some units it is necessary to unfasten or unlock device before the slide valve handle can be pulled out. After the tank is drained, close the valve (if applicable, lock in place).

After emptying the waste holding tank, flush or pour about two gallons of water through the toilet and drain again. This flushes the tank and helps clean the drain hose. Repeat as necessary.

To empty the gray water holding tank, follow the same procedure used to empty the waste holding tank. A flushing may not be necessary. When the tank is empty push the dump valve handle in until it seats (if applicable, lock in place). Remove the hose, wash it and return it to its storage holder. Replace the termination cap securely.


If your model is equipped with an outside shower this may be used to rinse out the inside of your sewer

hose before leaving the dump facility. It is recommended that you always drain the sewage waste holding tank first, and then the gray water tank. This assists in flushing and cleaning the termination valve and drain hose.

LP GAS SYSTEM

The liquified petroleum (LP) gas system in your unit furnishes fuel for hot water, heat, cooking and refrigeration (see illustration). LP gas provides a portable, efficient and inexpensive source of energy. It is stored in an LP gas tank which is mounted to the chassis of your unit and is serviced through an access door.

Under pressure in the tank, the LP gas turns to vapor; it is the latter that burns. Each tank has an automatic 80 percent stop-fill valve that allows space in the tank for vapor expansion. The high pressure of the vapor in the tank is reduced in two stages through a regulator. The tank pressure will vary with temperature and altitude, but may be reduced to about 12 psi in the first stage, then to about 6-1/4 ounces in the second stage (the 6-1/4 ounces per square inch also is expressed as 11 inches of water column).

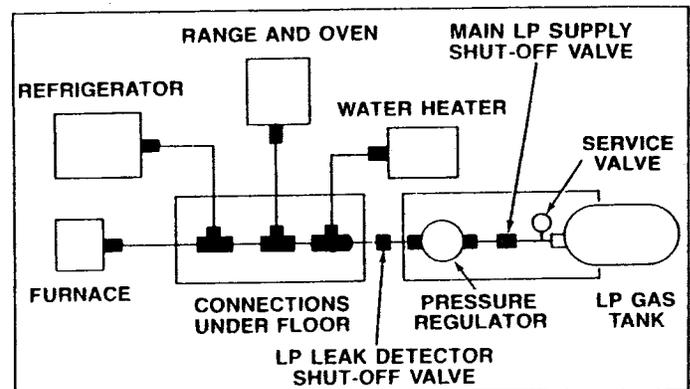

LP GAS SYSTEM (TYPICAL)

*** CAUTION ***

LP gas is usually propane or a blend of propane and butane. When you fill your tanks, be sure to use propane ONLY. Do not use butane or butane mixtures.

WARNING!

The LP gas system is designed and built to meet rigid standards, and it is tested before it leaves the factory. Your dealer also tests the system before it is delivered to you. Except for simple maintenance and occasional tightening of a connection, always take your vehicle to an authorized dealer for LP gas problems. Always have an authorized LP gas supplier fill your LP gas tanks.

WARNING!

LP gas burns readily and with intense heat. With proper care and maintenance, it is safe and efficient. There are, however, certain characteristics about LP gas you should know. LP gas settles into any closed area, it displaces air and could cause suffocation if not detected. It also could create a fire or explosion hazard. In its natural state, LP gas is odorless. An additive gives it a distinctive mustard odor so that leaks can be readily detected. Under certain circumstances you may not be able to detect LP gas by smell. For that reason, your vehicle is equipped with an LP leak detector which will provide an audible warning if a propane leak is detected. Never disable or bypass this critical safety device.

WARNING!

If you smell or think you smell gas:

1. Extinguish any open flames, pilot lights, all smoking materials.
2. Do not touch electrical switches.
3. Shut off the gas supply at the tank. CLOSE valve(s) or gas supply connection.
4. Open doors and other non-electrical ventilating openings.
5. Leave the area until the odor clears, and
6. Immediately call your gas supplier, and have the gas system checked and leakage source corrected before using again.

*** CAUTION ***

LP gas containers should not be placed or stored inside the living area of a vehicle. LP gas containers are equipped with safety devices that relieve excess pressure by discharging gas to the atmosphere.

Before using any LP gas appliance, read the respective manufacturer's operating instruction manual.

CLIMATE DIFFERENCES

The appliance will not function if the LP gas does not vaporize. Propane continues to vaporize down to -44 degrees F. Liquid gas does not vaporize as rapidly in cold weather, so you may place too great a demand on your tanks' capacities in certain conditions. This can cause a refrigeration effect resulting in frosting of the tank and regulator. Check with your dealer or LP gas supplier about the appliance demands that can be met by your tank at various temperatures. Always have your LP gas supplier add anhydrous methanol before filling the tank in cold weather.

Propane has become the main type of LP gas used

in RVs. It is recommended that you use only propane gas. The names of LP suppliers can be found in the Yellow Pages of your telephone directory under "Gas-Liquefied Petroleum-Bottled and Bulk." Many campgrounds now have LP fill facilities, as do some service stations.

To operate any LP gas appliance, the LP gas SERVICE valve must be open. When first used, or after a refill, there may be some air in the gas lines that will escape when you first open a range burner or similar LP gas valve. The air may extinguish your match or igniter the first time or two before you get ignition. Remember too, that when you close the tank's SERVICE valve some of the gas will remain in the lines. To completely bleed the lines of gas, close the tank's SERVICE valve and light a range burner to use up the excess. When the flame burns out, turn the range burner off.

REGULATOR PRESSURE


Check the LP gas regulator at the beginning of each season or whenever a problem is indicated. Correct line pressure is 11 inches of water column. Your dealer or LP gas supplier can perform this check.

LP gas regulators must always be installed with the diaphragm vent facing down. Regulators that are not in compartments have been equipped with a protective cover. Make sure that the regulator vent faces down and that the cover is kept in place. This will minimize vent blockage that could result in excessive gas pressure and could cause a fire or explosion.

LP LEAK DETECTOR

Your LP Gas Leak Detector is located at the base of the kitchen cabinets just inside the entrance door. It is designed to provide years of trouble free service. It is recommended that your LP Leak Detector be in the ON position whenever you are using your RV. The system should be turned off when the vehicle is in storage or will be unused for several days.

One of the most important features of this leak detector is an EARLY WARNING gas alarm ability and a malfunction indicator. See your manufacturer's instructions for further information.

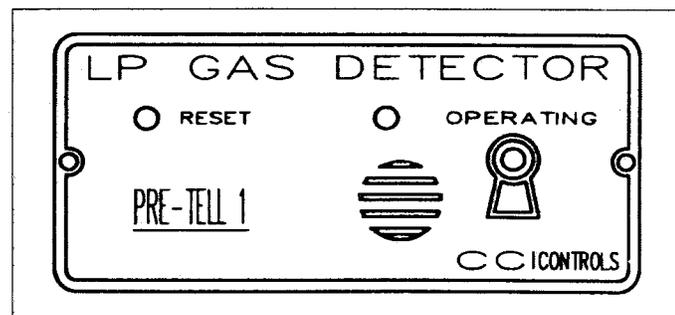

LP GAS LEAK DETECTOR (TYPICAL)

LP GAS REGULATOR FREEZE-UPS

LP gas regulator freeze-up is a problem RV owners can prevent if they are aware of its causes. Although

every precaution is taken by fuel producers, tank manufacturer's, and LP gas dealers to keep moisture out of the fuel, this problem at times does exist and causes regular freeze-ups. Suggestions that you may want to follow to help prevent this moisture are:


1. Always keep the main tank valve closed during periods that gas is not in use, especially if the tank is empty.
2. Contact your LP gas dealer about the addition of anhydrous methanol to your tank. Your dealer may do this for a minimal charge, and it will help to prevent freeze-up.

FILLING LP GAS TANKS

Before having an LP gas tank filled, be certain all burners and pilot lights are off.

Drive your motorhome to an authorized LP supplier for filling (never remove the tank). He will connect the fill nozzle to the LP gas tank fill valve. When the tank is being filled, the Service valve must be CLOSED and the 20% liquid level gauge must be OPEN. The 80% stop fill valve may close the valve before liquid appears at the 20% liquid level gauge, but if liquid does appear, stop filling immediately. The tank is filled to its liquid capacity. When liquid LP gas is no longer visible, close the liquid level gauge. Do not use a wrench to tighten the Service valve or the 20% gauge; they are designed to be closed leak-tight by hand. If you cannot hand tighten properly, the valve probably needs repair or replacement.

Because there may be some leakage of LP gas when the tank is being filled, we recommend that you drive at least a mile away from the LP gas dealer before you light any pilots or appliances if the scent of LP gas is present. Open the windows and doors and wait 30 minutes. If the odor is still present, follow the instructions in the LP LINE CHECK, in Maintenance section.



A warning label has been located near the LP gas container. This label reads:


DO NOT FILL CONTAINER(S) TO MORE THAN 80% OF CAPACITY. Over-filling the LP gas container can result in an uncontrolled gas flow which can cause fire or explosion. A properly filled container will contain approximately 80% of its volume as liquid LP gas. If the tank is over-filled, have the LP gas dealer bleed out the excess. DO NOT smoke, strike a match, or ignite a lighter when the LP gas container is being filled. A spark or flame could ignite fumes. Be certain all burner and pilot flames are out and Service Valve is closed when filling your vehicle's LP gas or fuel tanks.

LP GAS LINE CHECK

Regular maintenance of the LP gas system is extremely important to insure the systems safety. All

checks and/or repairs should be performed by an authorized service agency who is trained in dealing with RV LP gas systems. DO NOT ATTEMPT repairs yourself. The system should be checked at least once every 30 days of use or 5,000 miles of travel. If you are using your vehicle in rough terrain situations or traveling over rough roads these inspections should be done more frequently.

If you check connections for leaks yourself DO NOT USE OPEN FLAME OR MATCHES TO CHECK LP GAS LINE CONNECTIONS. Use only an approved leak detector solution. DO NOT USE products that contain ammonia or chlorine (most common household soaps). If you detect a leak, shut off the gas and contact either your dealer or the nearest authorized LP gas dealer to have repairs made.



DO NOT MODIFY YOUR LP GAS SYSTEM. DO NOT REMOVE COMPONENTS OR REPLACE WITH COMPONENTS THAT ARE NOT OF EQUAL VALUE. Failure to follow this warning will void any vehicle warranty. Failure to follow this warning can result in explosion or fire which may cause injury or death.

APPLIANCES ACCESSORIES

VEHICLE SECURITY SYSTEM

Your coach may be equipped with a security system which includes a passive infrared detector (PIR). To arm the system, point the transmitter at the coach and press button #1 momentarily. Press the same button again to disarm the system. When armed the alarm is triggered by entry thru the main coach door or the drivers door. In addition the passive infrared detector will activate the alarm if a large mass such as an arm, leg or body breaks the beam of light in the kitchen or front living area of the coach.

HEATED/REMOTE MIRRORS

The heated remote mirrors allow the driver 4-way directional setting for both the driver and passenger-side mirrors without leaving the captains chair. The switches are located on the left side of the instrument panel.

REAR VISION CAMERA

The rear vision camera is mounted on the upper rear of the coach and connected to a monitor on the right side of the drivers instrument panel. Normal operation of the monitor is in the standby position which automatically turns the camera on when the transmission is shifted into reverse. The camera position should be

selected to camera #1 and the day/night button selected as appropriate.

Important: Read thoroughly your Rear Vision Camera owners manual for complete instructions regarding proper operation.

ELECTRIC STEP

The electric step system includes a power switch located to the left just inside the entrance door. With the power switch on, opening and closing the entrance door will extend and retract the electric step respectively. In the extend position the under-step light will be on.


With the steps extended and the power switch in the "OFF" position, one can open and close the door to the coach repeatedly without the steps cycling up and down each time.

In the event that one forgets to turn the power switch back on before moving the coach with steps extended, the ignition safety system will automatically retract the steps when the vehicle ignition is turned on. A last out feature will extend the steps the first time the entrance door is opened after the vehicle ignition is turned off.

Important: Read thoroughly your electric step owners manual for complete operation, maintenance and lubrication instructions.

TV ANTENNA/CABLE SYSTEM

This system allows you the flexibility to use the amplified TV antenna hook up, or cable, if your location has cable hook ups. To use the TV antenna, simply turn on the power supply switch at the wall plate. To use the cable, turn the power switch off at the wall plate.

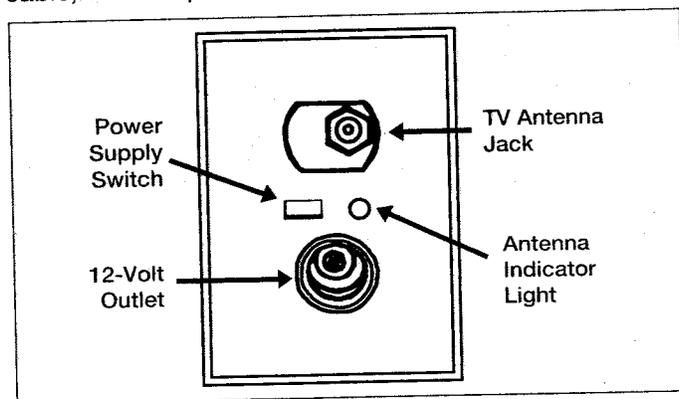


TV WALL PLATE

TV ANTENNA CONTROL

Turn the antenna control handle in the "UP" direction until some resistance is felt. Pull down the rotating plate to disengage it from the ceiling plate and turn it until you find the best sound and signal. Always turn on amplifier power switch.

Be sure to lower the antenna before moving your motorhome. Turn the rotating portion so that its pointer lines up with the ceiling plate pointer. Turn control handle in "DOWN" direction until some resistance is felt.

Turn off the amplifier power switch.

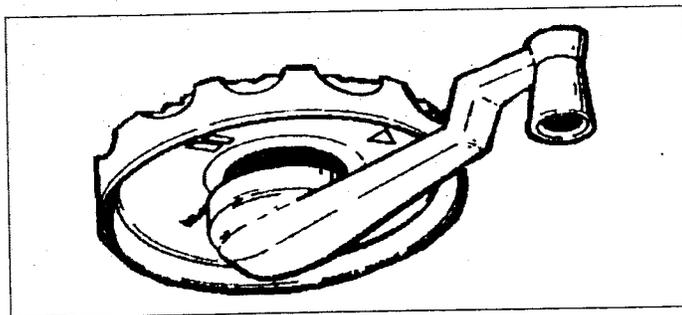

TV ANTENNA CONTROL

Note: Even though your 12 volt radio and/or TV antenna will operate on the 12 volt current that is supplied through the power converter, spikes and surges in the current are possible and will result in poor reception. It is recommended, therefore, that these items be used only in conjunction with a properly installed RV battery.

TELEVISION

Your color TV features remote control tuning, sleep timer with alarm and auto-programming of channels. The remote control unit is stored in the glove box on the passenger side of the coach. For specific operating instructions and descriptions of features, please refer to the enclosed owners manual.

VIDEO CASSETTE RECORDER

Your VCR features a 2 head record/playback system with remote control. For specific operating instructions and a description of features please refer to the owners manual.

CENTRAL VACUUM SYSTEM

Your optional Central Vacuum System is located under the dinette seat. Before using the vacuum cleaner, check to see that a filter bag is in place. To turn the unit on, lift the hose connection lid located underneath the dinette table and insert hose. The vacuum cleaner will function on AC power using the shoreline or generator. When vacuuming is completed, remove the hose and the cleaner will automatically turn off.

Note: Change filter bags frequently, depending on use. Additional bags may be obtained from your Coachmen dealer.

AM/FM CASSETTE STEREO

Your AM/FM cassette stereo is located in the master bedroom and has a number of features to enhance your enjoyment, including:

- auto reverse tape play
- headphone jack
- digital clock and frequency display
- electronic tuning
- alarm/timer/sleep functions
- electronic volume control
- preset memory for 5 AM and 5 FM stations

For specific operating instructions, cleaning, tuning and other helpful hints; refer to your owners manual.

AM/FM STEREO CASSETTE PLAYER

Your AM/FM stereo cassette player is located on the right side of the drivers instrument panel. It features a stereo cassette player with AM/FM radio with programmable station memory function. For specific operating and cleaning instructions, please refer to your owners manual.

Your unit may also be equipped with an optional compact disc player. Operating instructions are included in the owners packet.

FOOD CENTER

Your Nutone Food Center comes equipped with the blender attachment. Other attachments available are:

- meat grinder
- ice crusher
- mixer
- shredder-slicer
- can opener
- food processor
- coffee grinder

Check with your Coachmen dealer for information on obtaining these attachments. Please refer to your owners manual for instructions in operating your food center.

COFFEEMAKER

Your Black and Decker thermal Carafe Coffeemaker feature under-the-cabinet mounting and one-step brew control for your convenience. Please refer to the enclosed owners manual for detailed use and care instructions.

FURNACE

The furnace is an automatic ignition type, controlled by a wall thermostat. Heat is delivered through a duct system.

Note: Although the furnace's fuel source is LP gas, the power operates on 12 volt electricity. The furnace requires a minimum of 9 volts to operate.

* CAUTION *

DO NOT use portable fuel-burning heating appliances, including kerosene heaters, wood and charcoal grills and stoves, in your motorhome. Such appliances produce excessive moisture, consume oxygen and may emit dangerous products of combustion.

IGNITION

Before lighting a furnace, be sure the LP gas bottle Service valve is OPEN and the thermostat ON/OFF switch is ON.

Automatic Models

Turn manual gas valve to ON. Set thermostat to desired temperature and turn ON/OFF switch to ON. An automatic relay in your furnace provides a time delay. Therefore, when you turn up the thermostat there will be a pause prior to startup of the blower. At blower startup, your furnace air will enter your living quarters at room temperature.

Your furnace will start warming quickly and continue getting warmer for the next several minutes. If your motorhome is cold throughout, it may take from one to several hours to heat all interior walls, ceilings, floors and fixtures to a comfortable temperature. Once reached, your furnace will automatically maintain steady warmth.

On initial lighting, the burner may not ignite due to air in the gas lines. If this occurs, set the thermostat back to the lowest setting and wait 30 seconds; then reset thermostat to the desired temperature.

* CAUTION *

If the furnace does not light after several attempts, while allowing each time for any delay, turn the thermostat and the furnace gas control valve OFF and contact your authorized Coachmen dealer or service center. DO NOT attempt to repair or adjust the furnace yourself.

For complete shutdown, turn gas valve to OFF and the thermostat to OFF.

When changing your unit's electrical source, as from 12 volt to shoreline or generator, turn the thermostat off. This will preserve the life of your furnace's electronic system. Carefully read the furnace manufacturers manual for other important Do's and Dont's of service and operation.

PREVENTIVE MAINTENANCE

Preventative maintenance should be performed annually by an authorized dealer and should include cleaning of heat exchanger, furnace ducts and blower wheels to remove dust, lint and other foreign materials. The furnace's LP gas system should also be checked. Check manufacturer's manual for further information.

REAR AUXILIARY HEATER

Your rear auxiliary heater is designed to help heat your unit while in transit. It obtains its heat from your engine's heater hoses and thus can only be effective while your unit's engine is running. With a simple flick of a switch on the dash your heater will begin.

Note: *It is very important to maintain hoses and connections to and from the auxiliary heater. Check for leaks, weather checked, cracked or worn hoses. Check hose clamps; make sure they are not loose, damaged or rusty. Have a qualified person repair immediately upon detection. Replacement parts must be at least equal to the original components. Failure to do so, could cause engine damage or leave you stranded.*


REFRIGERATOR

Your Norcold refrigerator can be operated either off your L.P. gas system of 120 volt electricity. An optional ice maker uses either energy source to freeze ice but dispenses on electricity only.

The refrigerator operates on the gravity flow of chemicals, so it must be level. If you must stop on an uneven site for more than 30 minutes, turn the refrigerator "OFF." Use a level in the freezer compartment to ensure that the unit is level.

Before starting on a trip, use the shoreline connection to cool the refrigerator the night before departing. Keep items to be stored in the motorhome refrigerator in your home refrigerator or freezer until you are ready to leave. This will reduce the cooling load on your refrigerator and help keep perishable foods fresh longer;. Always store food in sealable containers or suitable wrapping. When traveling, switch to LP gas operation. Use door lock during travel.

Note: Some states and municipalities do not allow operation of LP gas systems which the vehicle is in motion. If you have a question in this regard, check with local law enforcement authorities.

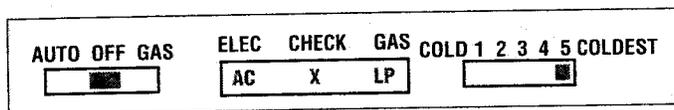

NORCOLD REFRIGERATOR CONTROLS

The Norcold refrigerator has switches near the top of the unit to select the type of operation you desire. A colored light will come on to indicate that the type of energy you have selected is operating properly: blue for LP gas, and green for 120 volt electricity. On all models, turn the thermostat to Max Cold position when starting, then later adjust the thermostat to the desired temperature. When using LP gas, if ignition does not occur, a Check (CK) Light will come on. To restart when Check Light is ON, depress the switch to the "OFF" position and wait 10 seconds. Then depress switch again to the LP gas position. If you have just refilled your LP gas bottles, this operation may have to be repeated four times. Do not continue to reset the LP gas switch if the Check Light continues to come on after four attempts. If the Check Light comes on, turn the switch to "OFF" and check your LP gas supply. If you have an ample LP gas supply, consult your Coachmen dealer.

MODE SELECTOR

Auto: The refrigerator will operate on 120 volts AC so long as AC power is available to the refrigerator. If AC power is lost or disconnected, the selector will automatically switch to gas operation. As soon as AC power is restored, the selector automatically switches back to AC operation (the user does not have to manually switch the refrigerator back to AC). When the operation is automatically switched to gas, the burner will ignite and continue to operate the refrigerator at the same thermostat setting as that set for AC power.

Gas: This selection allows the refrigerator to operate on LP gas only. It will not automatically switch modes regardless of whether AC power is connected. If the flame is lost (LP bottle empty, etc.), the operation locks out and must be manually reset.

HIGH HUMIDITY/STORAGE SWITCH

Turning this switch to HIGH HUMIDITY will keep the surface between the door openings dry during high humidity conditions. The switch should be left in the NORMAL OPERATION position unless condensate is observed in this area. Both NORMAL and HIGH HUMIDITY positions allow the cabinet light to activate when the lower door is opened.

When your RV is being stored for the winter, this switch should be placed in the STORAGE (light off) position. This shuts off all DC power to the light and humidity heater and allows the refrigerator door to be left open for airing without chance of battery drain during storage.

CARE OF REFRIGERATOR

Remove food and ice after each trip. Clean the interior of the refrigerator with a lukewarm, mild baking soda solution. The evaporator, ice trays and shelves must, however, be cleaned with warm water only. Wipe dry with a soft, dry cloth. Never use strong chemicals or abrasives to clean the refrigerator; they can do harm to the plastic and aluminum surfaces. If the refrigerator is not in use for a period of time, turn all power "OFF," empty and clean the interior and leave the door slightly ajar.

To defrost refrigerator freezer, remove food and ice. Turn the thermostat "OFF." To speed up the defrosting process, fill the ice trays with hot water. When all frost is melted, empty the drip tray and dry the interior of the refrigerator with a clean cloth. Replace the drip tray and ice trays, replace all food stuffs and set the thermostat at "MAX" for a few hours. Later, reset the thermostat to its normal position.

Important: Refer to your Norcold operation instructions for additional safety precautions, operating information and care of your appliance.

SPOTLIGHT

The spotlight is a possible option on your Coachmen Class-A. You will find it mounted on the roof of your unit directly above the driver's seat. The control panel is located on the lower portion of the instrument panel by the driver's right knee. This will operate the light in the "Spot" and "Flood" modes, and control the direction of movement. The spotlight operates solely off the chassis battery and the ignition key must be on for the light to work.

BATTERY DISCONNECT

The battery disconnect provides a simple and safe means of disconnecting the coach and chassis batteries

of your unit. With a touch of a switch on the panel located to the left of the entrance door, the batteries will be completely disconnected. Advantages of using the battery disconnect switch include:

Preventing unwanted discharging of batteries during extended periods of storage.

Preventing shorts or fire hazard while working on the 12 volt electrical system.

To operate the Battery Disconnect, press the USE/STORE switch to the "USE" position for either the coach or chassis. The indicator light for that battery will glow. To prevent the discharge of your batteries, press the USE/STORE switch to the "STORE" position. Do this for both batteries.

Note: Coach battery must be in the "USE" position in order for your coach battery to charge when plugged into the shoreline.

ROOF AIR CONDITIONING

If you did not order the optional roof air conditioner at the time of purchase, your motorhome is wired so that one (or two) can be installed later. The roof air conditioner will operate only on 120 volt electricity.

Important: Refer to your roof air conditioning operating manual for complete instructions regarding use of your unit.

Before starting any model of roof air conditioner, close all doors and windows. The controls for the air conditioner are on a panel on the portion of the appliance that is attached to the ceiling inside the motorhome. You can select cooling, fan only, or—with the optional heat package—heating.

For cooling, turn the Selector switch to COOLING, then rotate the thermostat to the position that is most comfortable to you and adjust the directional louvers to the desired direction of air flow. the compressor will cycle on and off, automatically maintaining the temperature you've set.

The optional heat unit on some models is not a substitute for a primary heating system. It is designed to warm the air during moderately cool days or nights. If your air conditioner is equipped with the optional heat package, turn the selector switch to HEAT and rotate the thermostat to the position most comfortable and adjust the directional louvers to the desired direction of air flow. The heater will cycle on and off automatically to maintain the temperature.

If your vehicle is equipped with 50 amp service, and has two roof air conditioners, both air conditioners can be operated at the same time. You must be plugged into a 50 amp receptacle, or be operating the generator.


*** CAUTION ***

If you must use an adapter/reducer on the shoreline plug, only one roof air conditioner should be operated.

The combined amperage load for two air conditioners may trip the circuit breaker and cause damage to one or both air conditioners.

A/C SELECTOR SWITCH


The AC selector switch is provided on all models with 30 amp service. This switch enables you to choose which roof air conditioner receives power. With the generator providing power to the coach it is possible to operate both air conditioners simultaneously. The AC selector switch must be placed in the front position for this to occur.

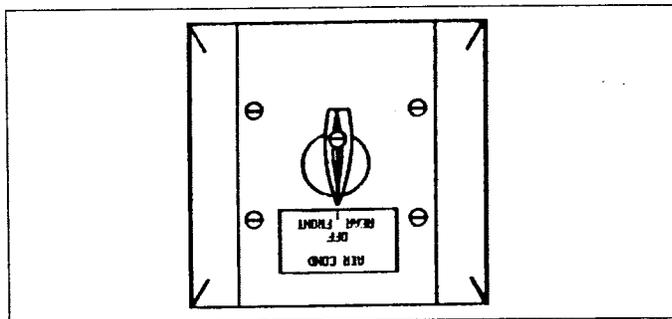

SELECTOR SWITCH

GAS WATER HEATER

Your Atwood Gas Water Heater is capable of heating 6 gallons of water to a preset temperature. It is operated off the coach's LP gas system and is turned on and off by means of a remote switch which controls the electronic ignition. When the system is connected to city water, fill the water heater by opening a hot water faucet. When filling the fresh water tank, turn the water pump "ON" and open a hot water faucet. In either case, when water flows steadily, turn the faucet off.

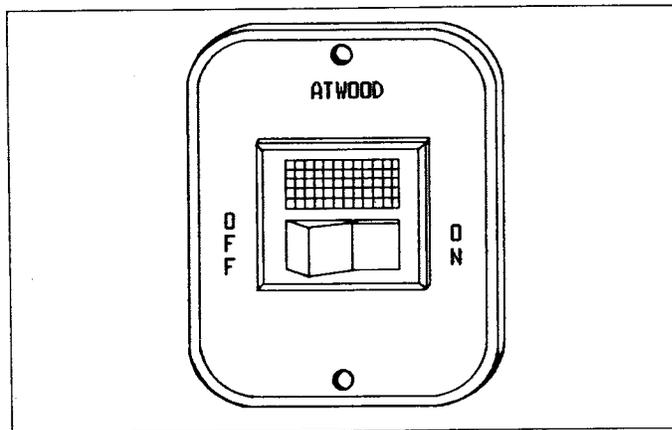

REMOTE WATER HEATER SWITCH

Before attempting to ignite the water heater, be certain to open the LP gas bottle service valve. Place the remote water heater switch in the "ON" position. If the switch light comes on, place the switch in "OFF" position and wait 5 minutes. the switch light will only come on in the event of water heater malfunction or if the flame fails to light. After the required delay, again place switch in "ON" position. It may take more than one start

attempt when unit is being used for the first time or after the LP gas bottle has been refilled. For complete shut-down, place switch in "OFF" position.

*** CAUTION ***

Do not activate switch unless water heater is full of water.

DRAINING

The hot water system has a drain plug or drain cock in the water heater which must be opened or removed to drain the water heater tank. To facilitate drainage, open all hot water faucets. When water ceases to drain, replace plug. Because of the location of the drain plug, about two quarts of water will remain in the bottom of the tank.

CARE OF WATER HEATER

To flush the tank, connect a hose to the city water fill. Remove the drain plug from the water heater tank. Run water for several minutes to flush tank. Turn water off and reinstall drain plug.


WARNING!

Hydrogen gas can be produced in a hot water system served by a heater that has not been used for a long period of time (generally two weeks or more). HYDROGEN GAS IS EXTREMELY FLAMMABLE. To reduce the risk of injury under these conditions, it is recommended that the hot water faucet be opened for several minutes at the kitchen sink before using any electrical appliance. If hydrogen is present, there should be an unusual sound such as air escaping through the pipe as the water begins to flow. There should be no smoking or open flame near the faucet at the time it is open. Contact your dealer or the Coachmen Service Department at the address on the manufacturer's warranty if you are not certain of what action you should take.

Important: For further instructions in the use and maintenance of your Atwood Gas Water Heater please refer to your owners manual.

RANGE, RANGE HOOD, OVEN

Your motorhome has a three burner range and it may have an oven beneath the range. It has a power range hood with fan and light. The range burners and oven are LP gas appliances. Read the range manufacturer's manual carefully for complete details on the operation and care of the range, range hood and oven.

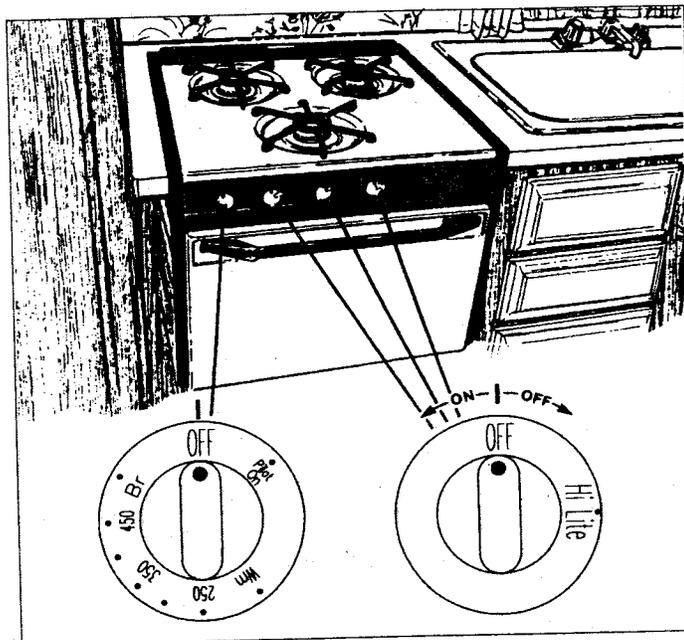

RANGE AND OVEN CONTROLS

WARNING!

IT IS NOT SAFE TO USE COOKING APPLIANCES FOR COMFORT HEATING. Cooking appliances need fresh air for safe operation. Before operation:

1. Open overhead vent or turn on exhaust fan.
2. Open window.

This warning is to remind you to provide an adequate supply of fresh air for combustion. Unlike homes, the amount of oxygen supply is limited due to the size of the recreational vehicle. Proper ventilation when using the cooking appliance(s) will avoid dangers of asphyxiation. It is especially important that cooking appliances not be used for comfort heating as the danger of asphyxiation is greater when the appliance is used for long periods of time.

LIGHTING THE PILOTS

There are pilot burners on all LP gas ovens. All pilot lights are turned on and off by the oven control knob.

*** CAUTION ***

Be sure that appropriate knobs are turned off when burners are not in use to avoid the risk of unburned LP gas accumulating in the vehicle. The oven control knob must be in the PILOT'S ON position for the pilots(s) to be lit. Once lighted, the Pilot(s) will continue to burn.

LIGHTING THE RANGE

Be certain that the LP gas Service valve is OPEN. Light a match and hold it close to the range burner making sure you are lighting the valve you turned on

Turn the burner's control knob to full ON. Air in the line may cause a blowing noise and may extinguish the match. When the line is free of air, the burner will light readily. Adjust the burner flame with the control knob.

REMOTE FAN SWITCH

Certain models will come with a range hood equipped with a "remote fan switch." This switch will automatically activate the fan while simultaneously opening the vent on the exterior of the unit.

Note: To operate this switch, locate the lever on the front of the range hood, pinch fan switch lock and pull lever. Push in firmly to lock vent door before moving vehicle.

CARE OF RANGE AND OVEN

Allow the range top to cool, then clean it with hot, soapy water. Use a damp cloth to clean chrome surfaces. Grease splatters, which may bake onto the surfaces, should be wiped off before they are time to harden. Use chrome polish to remove stubborn stains.

Clean the oven with commercial cleaner after each trip, or as necessary. DO NOT apply cleaner to aluminum gas tubing, thermostat sensing bulb or electrical components.

CARE OF RANGE HOOD


For metal surfaces, use the same procedure as for the range top. For the power hood, clean the plastic light cover by removing and washing it. If the light burns out, replace with a bulb of the same size. To clean the power hood filter, plugh slot located in center front of screen and pull down. If not greasy, simply tap the filter to shake out the dirt. If the filter is greasy, run hot, soapy water over it until grease dissolves. Allow the filter to drain and dry, then replace by positioning the flanges and push into place.

MICROWAVE OVEN

The microwave oven is a 120 volt appliance used to cook, defrost or simmer foods in less time than other cooking methods. Read carefully the oven manufacturer's owner's manual for specific instructions for the model which may be installed in your unit.

MONITOR PANEL

Your motorhome is equipped with a monitor panel located on the range hood that allows you to check the condition of your RV battery and the volume of fresh, waste and gray water in your unit's holding tanks. It also will monitor LP Gas in tank and includes switches for the water pump and generator. Your dealer will be happy to explain its operation.

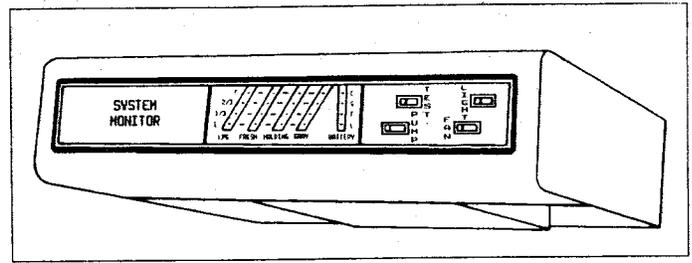

MONITOR PANEL

BATTERY CONDITION LEVELS

The battery condition will fall into one of the following levels:

- C** Converter, more than 14.5 volts (unfiltered circuit or dead cells in battery).
- G** Good, 12.6–14.49 volts.
- F** Fair, 12.0–12.5 volts.
- L** Low, 5–11.9 volts.

VEHICLE MAINTENANCE

STORAGE

You should follow these procedures if you will not be using your unit for an extended period.

LP GAS

Close the LP gas container's Service valve. Extinguish all pilots and close all appliance LP gas valves (oven/range, water heater, refrigerator, furnace). Light a range burner to consume any gas remaining in the lines. When the flame burns out, turn the range burner off.

WATER HEATER

Drain the water heater. To drain, see Water Heater Draining in the appliance section of this manual.

WATER TANK

To drain see Water Tank Draining in the Fresh Water System of this manual.

WATER PUMP

When the water tank and water lines have been drained, remove the outlet hose from the pump. Turn the pump on, allowing it to pump out any remaining water, usually about a cupful. Use a towel or cloth to catch this water. Reattach the outlet hose.

ELECTRICAL SYSTEM

Turn off all circuit breakers at the Power Center.

GENERAL

Close and secure all doors and windows. Open a roof vent or window slightly to allow circulation, but not so far that rain or snow can enter.

FUEL SYSTEM

During extended periods of vehicle storage (60 days or more) fuel may deteriorate due to oxidation. This can damage rubber and other polymers in a unit's fuel system. It may also plug small orifices. To prevent such an occurrence, it is advised that a commercially available stabilizer ("STA-BIL" or equivalent) should be added to a vehicle's fuel tank whenever actual or expected storage periods exceed 60 days. The instructions for use accompanying the product should be followed. The vehicle should than be operated at idle speed to circulate the additive throughout the fuel system.

WINTERIZATION

Make special preparations for storing your unit in cold winter climates. All systems and components should be inspected and, if necessary, repaired prior to storage. Winterize the motorhome before removing the RV battery.

Note: *If you will be using your motorhome during cold weather, be certain to keep the fresh water system drained or use an approved, non-toxic RV antifreeze to prevent freeze-ups. Have an LP gas supplier add methanol to your LP gas containers. Consult your authorized Coachmen dealer for more information.*

REFRIGERATOR

Remove all food from the refrigerator, defrost and wash and dry the inside. Prop the door open so air can circulate.

CABINETS

Check the staple foods in your cupboards and remove any that could freeze and be damaged. Leave cabinet and closet doors open a little to prevent a musty odor or mildew.

HOLDING TANKS

The dump valve shafts should be inspected and lubricated. Be certain the dump valves are closed.

WATER SYSTEM

To winterize the fresh water system, place the operation valves in the winterize position. Place the short section of hose in a container of RV anti-freeze. Open winterizer/suction fill valve (or in-line valve to short hose). Turn on pump. The water pump will drain anti-freeze from container into system. This will not put any anti-freeze into the water tank. Turn faucets until anti-freeze appears.

*** CAUTION ***

Do not use automotive antifreeze in the water or sewage system. It is poisonous and also corrosive to sewage system components.

RV BATTERY

Recharge and add water, if necessary. Disconnect the battery cables and store battery in a cool, dry place. Check regularly and recharge as needed. Do not store battery in an area where possible exposure to extreme heat or sparks can occur. Be sure room is properly ventilated to dispel hydrogen fumes given off by battery.

WINDOWS

Cover with newspaper or cardboard to protect fabrics from fading.

EXTERIOR VENTS

Cover range hood, refrigerator and furnace vents with plastic. Inspect all roof vents and replace, if necessary.

*** CAUTION ***

Never use appliances with vent covers in place.

EXTERIOR

Clean and wax, lubricate locks and hinges. Check under the motorhome for any openings which would allow varmints to enter; seal if necessary. Lock securely. Inspect throughout the winter months and remove any snow accumulation from the roof with a long-handled broom or similar tool.

INTERIOR/EXTERIOR CARE

RV owners are noted for the pride they take in the appearance of their units. Proper maintenance will do more than keep your motorhome looking nice. It can help ensure trouble-free operation and maximum efficiency of the appliance and accessories. Failure to maintain the vehicle or its components may also constitute a breach of your warranty obligations. Just as an open window or an unrepaired leak in your home may lead to costly damage, the failure to repair leaks in your vehicle or to reseal your seams may result in serious damage to your motorhome. Read the various appliance and component manufacturer's manuals for specific maintenance information.

Unless otherwise noted, maintenance functions should be performed at least annually. All maintenance schedules listed are the minimum requirement; heavy use, unusual temperatures or humidity, or other environmental conditions may require more frequent maintenance. At the start of each season, or after a period of storage, thoroughly inspect and test all systems and components to be certain they are functioning properly before you use your motorhome.

Airing of the unit is essential before you occupy it. See details under the AIR QUALITY and CONDENSATION sections of this manual.

Awning supports and bright metal parts should be cleaned and coated with silicone annually.

Automotive and Chassis System of your vehicle should be serviced and maintained as outlined in the chassis owner's manual.

Axle and Suspension should be inspected frequently.

Batteries should be inspected frequently and refilled or recharged as necessary; battery cables and terminals should be checked and cleaned every 90 days.

Body should be washed to remove dirt, dust, road tar, bird and tree droppings, insects, and other foreign material from exterior surfaces. Use a mild soap in luke-warm water. Apply an automotive-type wax at least once a year.

Bumper and Frames that are painted, or any exposed painted surface, should be inspected for damage and rust. Rust should be removed and bumper and frame painted with rust preventive paint annually.

Counter and Table Tops should be cleaned periodically with a mild detergent.

Electrical System should be inspected and tested prior to each trip. Check the shoreline for damage. Test the 120 volt system for proper polarity and voltage. You may want to purchase a ground monitor and a line voltage tester to perform these checks.

Fabrics need regular and continuing care. To keep them at their best, vacuum and brush away loose dirt before it becomes embedded and more difficult to remove. Clean spills and stains while fresh. VELVET fabrics should be cleaned with extreme care. Spills on velvet generally will bead-up. Blot them up quickly and gently so as not to force the stain deep into the fabric. If a stain remains, spot-clean using one of the methods described below. Wipe the stain in the direction of the pile to prevent distortion. When the fabric is dry, gently brush with a soft brush. Many velvet fabrics cannot be cleaned with water-based cleaned agents.

Draperies, Curtains, Bedspreads should be dry-cleaned only.

Cushions, Chairs, Sofas may be labeled with the voluntary industry cleanability code. Because dyes or backings on some upholstery fabrics will be affected by water or solvents, the cleanability code will indicate the cleaning method that is safe for your fabric. If the furniture is not coded, test the fabric for discoloration on an inconspicuous part of the furniture before spot-cleaning. The code is symbolized by the following letter:

W

Use only water-based cleaning agents or foam. Mix two tablespoons ammonia or detergent, such as Ajax liquid, with a quart of water. Wipe the stain gently with a clean cloth dampened with the solution. Continue wiping, turning the cloth so that you are always using a clean portion, until the stain is removed. Be careful not to wet the fabric too much. Always wipe from the outer edge of the stain toward the center.

S

Use only mild, pure, water-free dry-cleaning solvents, such as Energine or Carbona. Dampen a clean

cloth with the solvent and follow the same procedure described under W.

WS

Either of the above methods may be used.

X

Clean fabric only by vacuuming or light brushing to remove soil. Do not use liquid cleaning agents of any kind.

TYPES OF STAINS

Water-Based—ketchup, soft drinks, milk, etc. Remove using method W.

Oil-Based—salad dressing, butter, greasy food, etc. Use method S or, for flat-woven fabrics, not velvet, apply Texize K2R Spot Remover according to directions.

Combination—ice cream, gravy, etc. are both watery and oily. Remove these types of stains using the S method and follow with the W method.

Mud—lift away what you can easily remove without forcing the mud into the fabric. Allow the remaining mud to dry completely, then vacuum. If the stain remains, clean with method W.

When overall cleaning is necessary, professional cleaners are recommended. However, if you wish to do it yourself, follow these suggestions:

1. Vacuum thoroughly
2. Test fabric for discoloration on an inconspicuous place using a foam cleaner such as Fibre Fresh Concentrate or Glamorene.
3. If no discoloration appears, use cleaner on entire item. *Note:* Many velvet fabrics cannot be cleaned with water-based cleaning agents.
4. After cleaning, you may wish to apply Scotch-guard fabric protector to such areas as furniture arms, backs and cushions.

Note: *The above information is provided only as a service and should not be interpreted as a warranty. The list of cleaning agents does not constitute an endorsement of products; other similar products may be equally effective.*

Floor Coverings should be cleaned as necessary. Vacuum carpeting. Avoid using heavy moisture; it could enter and damage your floor.

Parquet Wood Flooring—This optional flooring is located in the Kitchen area. Never damp mop with water. It will permanently damage the floor. A slightly damp cloth is acceptable to use for spills in small areas. Please refer to owners' packet for maintenance and troubleshooting.

Hinges should be inspected and lubricated with light household oil periodically.

Locks and Latches should be inspected and lightly lubricated with graphite periodically.

Windows, Doors, Compartment Doors should be inspected for damage or leaks prior to each trip. Replace any damaged or worn parts. Fix or replace any leaking parts. Lubricate moving parts and rubber seals

with silicone lubricant. Clean dirt and debris from window tracks.

LP Gas system should be inspected and adjusted as outlined in LP Gas section of this manual. Be certain mounting supports for tanks are secure. Before using, be sure all LP gas orifices and vents are clean.

LP Gas Line Check should be performed frequently. Always check the gas line connection after each refill and inspect the connections regularly, at least every 30 days or 5000 miles of travel. To check, turn off all burners and pilot lights. Open all doors and windows. Open the LP gas tank Service valve and use an approved LP leak detector solution to test all line connections. Bubbles indicate a leak. Do not use products that contain ammonia or chlorine. Tighten the connection with two open end wrenches until bubbles stop. If leak persists, contact your Coachmen dealer.

Lug Nuts should be checked every 50 miles for the first 200 miles or whenever a wheel has been reinstalled. If lug nuts continue to loosen, they should be replaced. Be certain to use the proper torque (450 to 500 ft./lbs.). For more information check Chassis owner's manual.

Body, Underbelly should be inspected for damage, rust or corrosion every 90 days and repaired as necessary. You may wish to apply undercoating.

Rubber Roof

1. For normal cleaning, standard household products may be used such as 409, Fantastic, or a good detergent soap. Be sure to use lots of water and keep sidewalls wet to eliminate possible streaking.
2. For stubborn stains, the use of an abrasive cleaner or scouring powder with a 3M pad (medium) should do the job. Again, be sure to use an ample supply of water.
3. For stubborn stains that resist normal cleaning, use unleaded gasoline (**Caution: Flammable**), followed by washing with soap and lots of water.

If an accident happens and you damage the roof, here is a temporary fix: Clean the affected area with unleaded gasoline (**Caution: flammable**) and let dry. Cover the area by overlapping layers of duct tape over the troubled area, until a permanent repair can be made by your Coachmen dealer.

Seams or Joints should be sealed around the roof, entrance doors, windows, roof and wall vents, access doors, storage compartments, roof edges, luggage racks, ladders, air conditioners, TV antenna, rails and moldings at least once each year with a similar high-quality sealant. Inspect all seams and joints at least twice a year and reseal as necessary. Some sealants cannot be applied over other types; when preparing areas to be resealed, scrape off old sealant. Clean metal areas with a vinegar and warm water solution. Clean fiberglass areas with mineral spirits before applying new sealant.

Shades, Blinds and Valances should be vacuumed or wiped with a damp cloth.

Sinks in the RV kitchen and bathroom should be cleaned with a cleaner that is non-abrasive. Stainless steel and porcelain cleaner may be purchased at most grocery stores. ABS cleaner may be purchased from your Coachmen dealer.

Steps should be inspected annually. Remove rust; paint steps and lubricate all moving parts.

Tires should be checked for damage and proper inflation prior to each trip.

TV Antenna exterior moving parts should be lubricated periodically.

Vents should be inspected and cleaned annually; lightly oil all moving parts. Inspect vents periodically for bird nests.

Vinyl-Coated ceiling and wall panels should be cleaned with a mild soap and damp sponge as needed.

Water Heater control compartment should be kept clean and free of combustible material and flammable liquids. The vent and combustible air grille should be clear of any obstructions. Manually operate the pressure temperature relief valve at least once a year. Operate only when storage water in tank is cool. Periodically compare main and pilot burner flame with illustrations in the manufacturer's operation instruction manual. Do not tamper with the pilot orifice to increase the pilot flame size; this can cause high water temperature and failure of gas control.

Wood Cabinetry should be protected and cleaned several times a year using any good non-silicone wood polish. Careful control of temperature and humidity will help reduce expansion and shrinkage of doors and door panels. If shrinkage occurs and unfinished parts of the door panels are exposed, cover the exposed areas with matching touchup stain available from your Coachmen dealer.

EXTERIOR LIGHT BULBS

Location	Bulb Number
Tail-Stop & Directional	_____
Step Light	_____
Compartment Light	_____
Back-up Lights	_____
Turn Signal (Front)	_____
Clearance Light	_____

INTERIOR LIGHT BULBS

Location	Bulb Number
Dinette	_____
Bathroom	_____
Refrigerator	_____
Ceiling	_____

HOLDING CAPACITIES

(Listed in Sales Brochure)

Water Heater	_____
LP Gas Tank	_____
Fresh Water Tank	_____
Waste Holding Tank	_____
Gray Water Tank	_____
Fuel Tank	_____

Appliance Identification Form

Should your unit or one of the appliances require warranty service, you will have to identify the manufacturer, model designator and serial number. Fill in this form as soon as possible. It will help you meet identification requirement. Depending on your unit, certain items listed below may be offered as either optional and/or standard. Most of this information can be found on the Recreational Vehicle Data Card attached to the inside of one of the kitchen cabinets.

EQUIPMENT	MANUFACTURER	MODEL DESIGNATOR	SERIAL NUMBER
Automotive Air Conditioner	_____	_____	_____
Convection/Microwave Oven	_____	_____	_____
Converter	_____	_____	_____
Electric Water Pump	_____	_____	_____
Entertainment Center	_____	_____	_____
Furnace	_____	_____	_____
Generator	_____	_____	_____
Ice Maker	_____	_____	_____
Keys—Door	_____	_____	_____
Exterior Storage	_____	_____	_____
Other	_____	_____	_____
Motorhome Body	_____	_____	_____
Motorhome Chassis	_____	_____	_____
Radio	_____	_____	_____
Range/Oven	_____	_____	_____
Refrigerator	_____	_____	_____
Roof Air Conditioner(s)	_____	_____	_____
Toilet	_____	_____	_____
TV	_____	_____	_____
TV Antenna	_____	_____	_____
VCR	_____	_____	_____
Water Heater	_____	_____	_____

ELECTRICAL SPECIFICATIONS

FUSES

Interior—15 Amp, 12 VDC

LIGHT BULBS

Interior 12 VDC (except dome light inside driver compartment and new SC ceiling light bulbs #1003 and wall fixture light bulbs #1076

Range Hood	—1141
Turn, Tail and Stop	—25 Watts (12 VDC)
Backup	—1157
License Plate	—1156
Clearance	—67
Patio	—57
Fluorescent Light Tube	—1003
	F15TB-CW

MISCELLANEOUS

See the brochure for the exterior dimensions, weight ratings and wheel/tire ratings which pertain to your unit.

Maintenance Schedule*

ITEM	Every Trip	Every 30 days or 1,000 miles	Every 60 days	Every 90 days or 2,500 miles	Every 6 months or 5,000 miles	Annually or 10,000 mile	REFERENCE
Airing	•						Air Quality, Condensation, Maintenance, this manual
Appliances	•					•	Appliances, this manual; Appliance Manufacturer's instructions
Awning Supports						•	Maintenance, this manual
Automotive System	•						Chassis Manufacturer's manual
Auxiliary Heater (Rear)	•		•				Maintenance, this manual
Batteries	•	•					Maintenance, this manual;
Brakes & Suspension					•	•	Maintenance, this manual; Brake & Suspension Manufacturer's manual
Body					•		Maintenance, this manual
Bumpers						•	Maintenance, this manual
Counter, Table Tops	•						Maintenance, this manual
Doors				•			Maintenance, this manual
Electrical System	•						Maintenance, this manual
Fabrics						•	Care of Fabrics, this manual
Floor Coverings	•						Maintenance, this manual
Frame						•	Maintenance, this manual
Hinges						•	Maintenance, this manual
Locks & Latches						•	Maintenance, this manual; Lock/Latch Manufacturer's manual
LP Gas	•	•					LP Gas; this manual; Appliance Manufacturer's instructions
Lug Nuts	•						Maintenance, Chassis manual
Roof, Body, Underbelly				•			Maintenance, this manual
Seams (Seal)						•	Maintenance, this manual
Shades, Valances	•						Maintenance, this manual
Steps	•					•	Maintenance, this manual; Step Manufacturer's instructions
Tires	•					•	Pre-Travel Check, Maintenance, this manual; Tire Manufacturer's manual
TV Antenna		•					TV Antenna Manufacturer's instructions
Vents						•	Maintenance, this manual; Vent Manufacturer's instructions
Vinyl Ceiling & Wall Panels	•						Maintenance, this manual
Water Heater	•					•	Maintenance, this manual; Water Heater Manufacturer's manual
Wheel Bearings						•	Maintenance, this manual; Axle Manufacturer's instructions
Windows	•						Maintenance, this manual; Window Manufacturer's instructions
Wood Cabinetry	•		•				Maintenance, this manual

* Maintenance schedules listed are minimum requirements; heavy use, unusual temperatures or humidity, or other environmental conditions may require more frequent maintenance.

Appendix B Troubleshooting Guide

NOTE: Use the manufacturer's owners' manuals for all appliance trouble shooting.

PROBLEM	CAUSE	SOLUTION
ELECTRICAL POWER		
No electrical power to unit	Shoreline connection.	Make sure you have power to the shoreline.
	Breaker switches may be off or tripped.	Reset breaker(s).
POWER CONVERTER		
Converter makes a clicking noise.	Circuit overload.	Reduce load on circuit.
	Reversed polarity at battery.	Correct polarity at battery.
	Short in recharge line.	Locate and fix short.
ELECTRICALLY CHARGED (HOT) CHASSIS		
Chassis is electrically charged.	Short in 110/120 volt circuit.	Disconnect unit from electrical supply. Have unit inspected and repaired if necessary, by a qualified service facility.
<i>NOTE: Determine if shoreline has proper polarity.</i>		
LIGHTS		
Lights flickering.	Loose fuse holders.	Tighten or replace fuse holder.
	Blown fuse.	Replace fuse with one of the same ampere rating.
	Broken connection or wire.	Replace connection and/or wire.
	Bad ground.	Make sure ground connection is secure.
Lights dim or half bright.	Bad battery.	Check battery condition.
	Possible converter malfunction.	Have converter checked by an authorized service center.
	Possible low voltage from shoreline.	Make sure voltage to shoreline is not too low.
OUTSIDE RECEPTACLE		
No power to outside receptacle.	GFI Breaker switch may be off or tripped.	Reset breaker.
	Bad power source.	Make sure you have power to the shoreline.

NOTE: Use the manufacturer's owners' manuals for all appliance trouble shooting.

PROBLEM	CAUSE	SOLUTION
GENERATOR		
Generator cranks but will not start.	Generator may be out of gas.	Check the fuel.
	Generator may be low on oil.	Check the oil.
Generator starts but no power.	Fuse on the generator may have blown.	Replace fuse with one of the same ampere rating.
	Breaker switches may be off or tripped.	Reset breaker.
RV BATTERY		
RV battery boiling.	Water low in battery.	Replace water to correct level in battery.
	Bad battery.	Replace battery.
	Defective battery charger in Power Center.	Have Power Center battery charger checked by an authorized service center.
RUNNING LIGHTS		
No running lights.	Blown fuse.	Replace fuse with one of the same ampere rating.
	Bad bulbs.	Replace bulbs.
LP GAS		
Smell Gas in and/or around unit.	Possible Gas leak in system.	<ol style="list-style-type: none">1. Extinguish any open flames, pilot lights and all smoking materials.2. Do not touch electrical switches.3. Shut off the gas supply at the tank valve(s) or gas supply connection.4. Open doors and other ventilating openings.5. Leave the area until odor clears.6. Have the gas system checked and leakage source corrected before using again.
WATER PUMP		
Pump fails to start when the switch is on.	Fuse located in the converter may have blown.	Replace fuse with one of the same ampere rating.
Pump continues to operate whether the faucets are open or closed.	Water tank may be empty or there might be a leak in the system.	Fill water tank and/or fix any leaks in the system.
Pump goes ON and OFF with faucets shut OFF.	There may be a leak in plumbing system fittings or lines.	Fix any leaks in plumbing system, by checking all fittings for tightness and replacing any broken parts.

NOTE: Use the manufacturer's owners' manuals for all appliance trouble shooting.

PROBLEM	CAUSE	SOLUTION
WASTE TANK		
Waste tank will not drain.	Build-up in tank.	Check for build-up in tank at stool. Make sure stool holds water.
TERMINATION VALVE		
Termination valve leaks.	Debris blocking valve or build-up.	Clear debris from and around valve.
	Bad gasket.	Replace gasket.
MICROWAVE OVEN		
Microwave oven will not operate.	No power to oven.	Check power supply.
	Door open, or timer OFF.	Close door and turn timer ON.
FURNACE		
Furnace does not light.	May be out of LP gas.	Check the LP gas supply.
	Low battery or bad battery.	Replace water to correct level in battery and/or replace battery.
	Blown fuse.	Replace fuse with one of the same ampere rating.
The furnace does not light after several attempts. 		<ol style="list-style-type: none">1. Turn the thermostat and the furnace gas control valve OFF.2. Contact your Coachmen dealer or authorized service center. DO NOT attempt to repair or adjust the furnace yourself.
REFRIGERATOR		
Refrigerator will not cool.	Unit not level.	Make sure unit is level.
	Upper and/or lower refrigerator vents clogged.	Clear vents of all debris.
	If on gas, empty tank.	Fill LP gas tank.
TV ANTENNA		
TV antenna has poor reception.	Power jack not turned on.	Turn power jack switch on.
	Bad connections at TV or wall plate.	Make sure the connections are good at both TV and wall plate.
	Cut or nicked cable.	Replace bad cable where needed at TV and antenna.
	Antenna not pointed in direction of "sending" station.	Point antenna in direction of "sending" station.

NOTE: Use the manufacturer's owners' manuals for all appliance trouble shooting.



PROBLEM	CAUSE	SOLUTION
REAR AUXILIARY HEATER		
No hot air.	Chassis engine not running.	Start chassis engine and let warm up.
	Bad hose connections.	Replace any bad clamps or hose.
	Low antifreeze level.	Check the antifreeze level in unit and replace as needed.
Heater motor not running.	Bad wire connections at auxiliary heater.	Fix any bad connections.

Reporting Safety Defects


If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying COACHMEN RECREATIONAL VEHICLE COMPANY.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or COACHMEN RECREATIONAL VEHICLE COMPANY.

To contact NHTSA, you may either call the Auto Safety Hotline toll-free at 1-800-424-9393 (or 366-0123) in Washington, D.C. area) or write to: NHTSA, U.S. Department of Transportation, Washington, D.C. 20590. You can also obtain other information about motor vehicle safety from the Hotline.

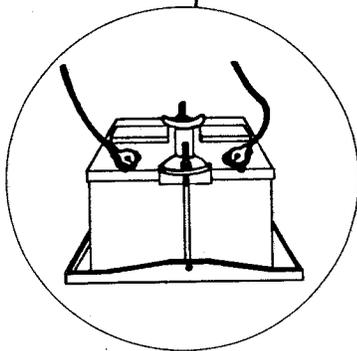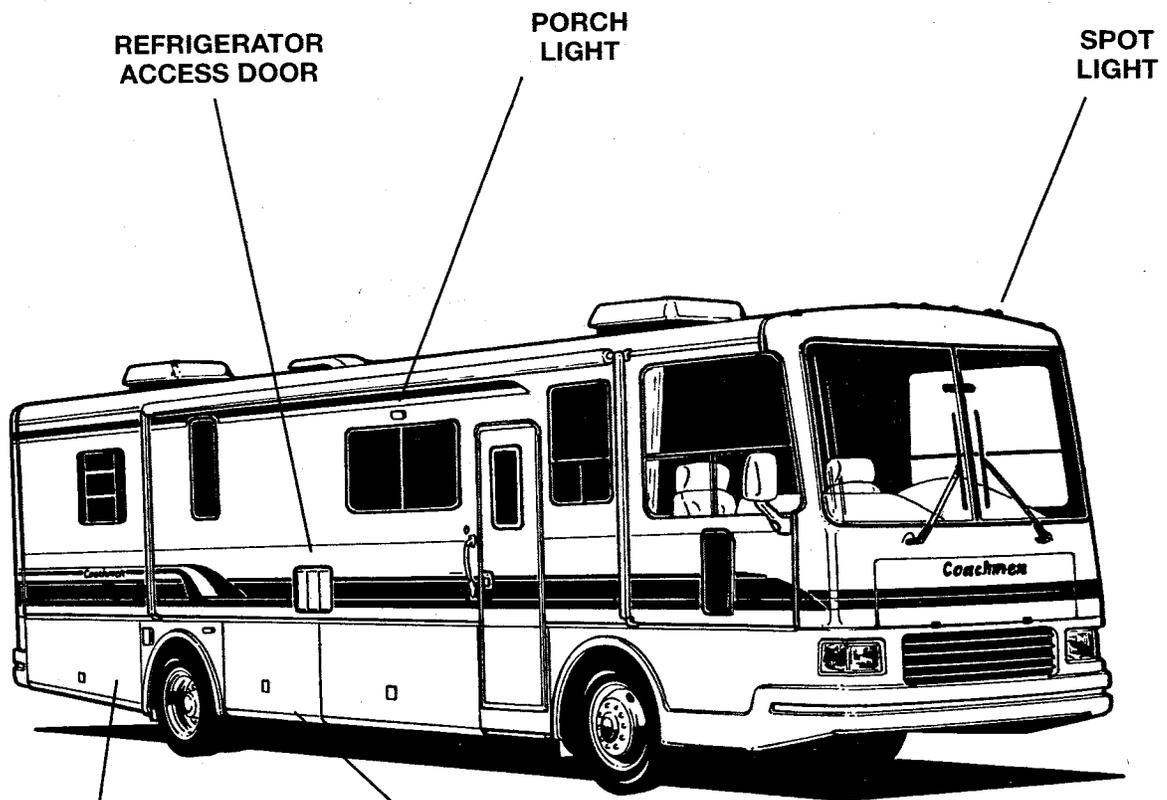


BATTERY

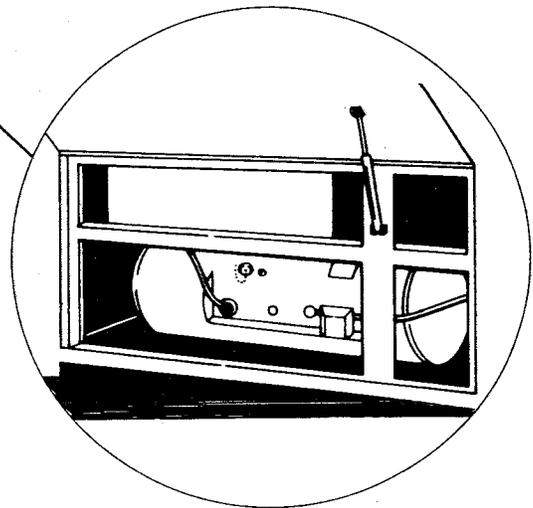


LP GAS TANK

**VEHICLES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY.
ITEMS SHOWN ARE NOT AVAILABLE ON CERTAIN MODELS AND MAY BE OPTIONAL ON OTHERS.**


**WATER
HEATER**

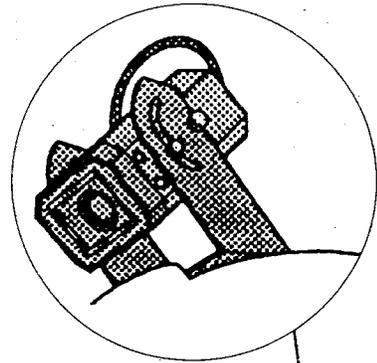


**REAR VIEW
CAMERA**

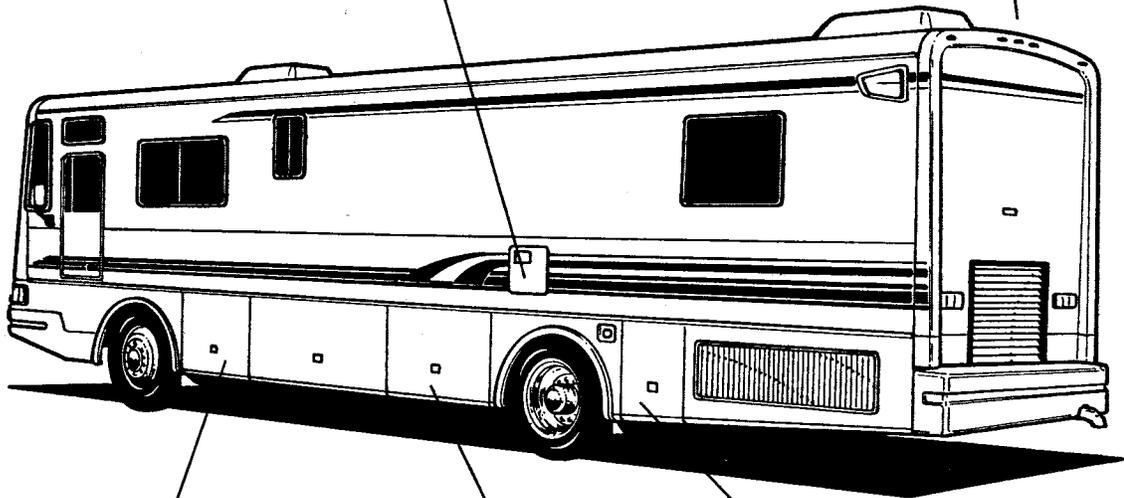

SHORELINE

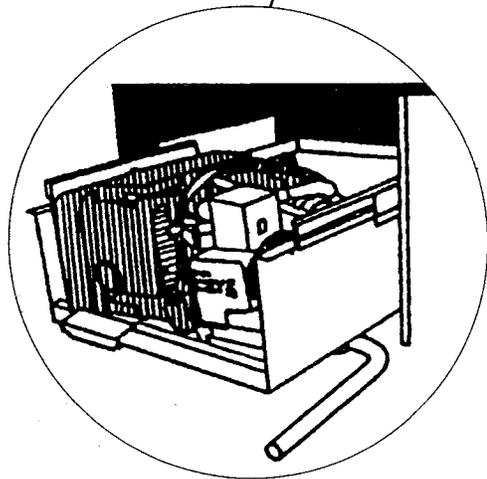

**GENERATOR
PULL-OUT TRAY**

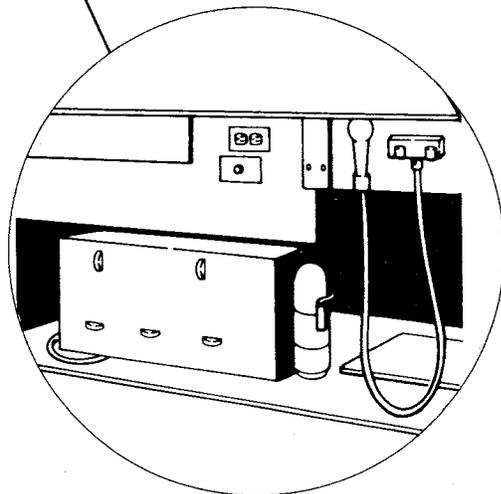

**CITY WATER FILL
and EXTERNAL SHOWER**



RECREATIONAL VEHICLE CO.

P.O. Box 1000

Middlebury, Indiana 46540

The Coachmen recreational vehicles described in this manual incorporate components produced by Coachmen Industries, its divisions, and various other suppliers. During the product year, Coachmen may decide to produce units with different components and/or specifications than initially scheduled. All such changes are approved for use by Coachmen in order to maintain the quality standards associated with the Coachmen name. All illustrations and specifications contained in this owners manual are based on the latest product information at time of publication. Coachmen reserves the right to make changes in operations, materials, equipment and specifications at any time without notice. Coachmen assumes no responsibility for any error in type or print reproduction of specifications in this owners manual. Check with your Coachmen dealer for more information if you have specific questions.